


**Fitting name:**  
**MSL\_ZTA.50 Surface\_4.5mm Xicato**  
**XOB\_90CRI\_3000K\_423lm\_Very**  
**Narrow**


**Date:**  
**07/12/2022**

**Delivered Output: 385 Lumen**

**LOR: 91% \***



### Beam details

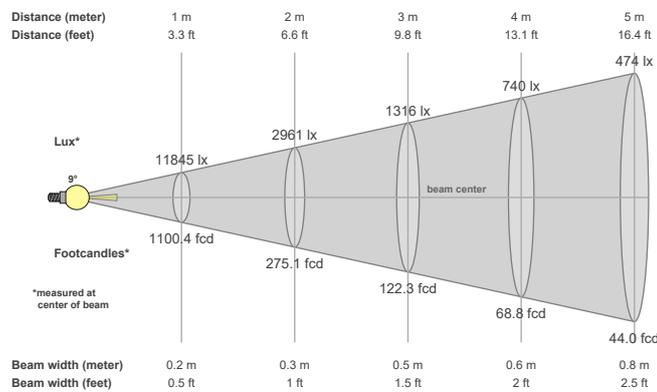

### Beam angles

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
<b>8.8°</b>	<b>16.9°</b>	<b>23.4°</b>

### Beam intensities

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
<b>11996 cd</b>	<b>99.7%</b>	<b>99.5%</b>

### Beam intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
11845lx	2961lx	1316lx	740lx	474lx	329lx	242lx	185lx	146lx	118lx	98lx	82lx	70lx	60lx	53lx	46lx	41lx	37lx	33lx	30lx
1100.4fcd	275.1fcd	122.3fcd	68.8fcd	44fcd	30.6fcd	22.5fcd	17.2fcd	13.6fcd	11fcd	9.1fcd	7.6fcd	6.5fcd	5.6fcd	4.9fcd	4.3fcd	3.8fcd	3.4fcd	3fcd	2.8fcd

Files are generated using the highest CRI and highest output 3000K light source available in the luminaire, other lower outputs and colour temperatures are of course available. Other outputs and colour temperatures are available on request, these may take some time as they must be tested.

\* These files are absolute measurements, not relative, as such the LOR is not generated when testing a fitting. To get an idea of LOR we use the measured delivered output in the files and documentation and calculate a ratio using the light source output mentioned in the file and product names. Note that the source output files will be nominal figures provided to us by the light source manufacturers and assuming a max 35°C ambient temperature so this LOR is as stated an indication only.

The power figures in the files have been generated based on the voltage and current to the light source only, not allowing for any driver losses. This is because our fittings are used with a number of different drivers (sometimes integral) and loaded differently, these variations effect the driver power factor and efficiency which in turn skews the power consumption figure.

Files are not always available for the specific combination of beam, accessory, driver selected, so these can be specifically requested. As with requests for specific colour temperatures this can take some time to generate as these combinations must be made then scheduled in to testing. MSL will advise on how long requests for specific data are likely to take.

MSL advise that lighting designers apply a +/- 5% tolerance allowance on the files we provide as subtle variations in system components (eg slight variations in output of LED light sources through a bin) and ambient temperature variations can effect output and distribution slightly.