

ZTA.70.Mains Track

STD-000584-0152

Configured Product

Light source

14mm LES

CCT

3000K

CRI

SL98

Beam

Flood 32.4°

Finish

Matt Black

Track adaptor colour

Black

Dimming

DALI

Attachments

Straight/Slash Cut Snoot (specified separately)

Secondary Lensing Accessories

With accessories

[Environment](#) [Downloads](#) [Technical](#) [Photometry](#) [Accessories](#)

Compliance



Environmental

TM65.2

CIBSE's TM65.2 provides a calculation methodology to assess the embodied carbon in lighting products.

ZTA.70 MAINS TRACK

TM66

CIBSE's TM66 includes a calculator called the Circular Economy Assessment Method (CEAM). An independent metric assessing a luminaire's Circular Economy credentials in terms of product design, materials, manufacturing and ecosystem.

ZTA.70 MAINS TRACK - 2.7

LCA and EPD

A report containing Life Cycle Assessment results, including environmental impacts across the full life cycle of the product. Impacts cover a wide range of effects on the environment, in addition to carbon emissions.


Please contact the Specifier Support team should your project have a requirement for additional environmental reporting. For more information, please [click here](#).

Photometry

These files represent the highest available initial output for each light source in 3000K. Lower outputs and other colour temperatures are available.


Derivatives

We can adapt our fittings to suit your specific needs, here are some examples of what we have done before.

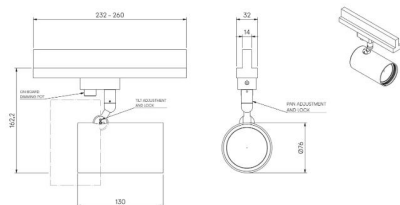

On Board Dimming

Order no. On board dim




ZTA.70.Bay Mains Track

Order no. ZTA.70.Bay Mains Track


Accessories and Attachments

This product can accept up to 2 x lenses and louvres:




Honeycomb
louvre for glare
control

Order no. ITY-
000392




Soft spread lens
to product a soft
elliptical beam

Order no. ITY-
000430




Sharp spread
lens to produce
a pronounced
elliptical beam

Order no. ITY-000431




Diffuser lens used
for softening and
widening beams

Order no. ITY-
000429



Clear lens can be used as protection from dirt/debris

Order no. ITY-000433



Stipple lens used
for softening
beams and
removing lens
artifacts

Order no. ITY-000434

This product can accept one of the following attachments:



Removeable barn doors used to crop beams

Order no. STD-000302




Removeable straight cut or slash cut snoot.

Order no. STD-000612

Related Projects



Young V&A

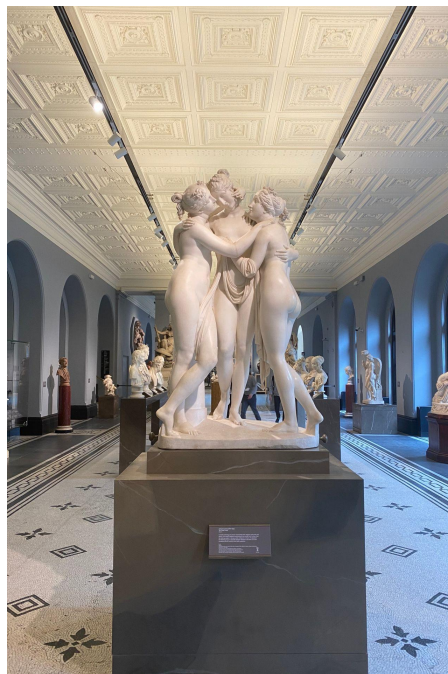

V&A, Hintze Galleries



National Portrait Gallery

Service Commitment



Related Products



ZTA.50.Mains Track



ZTA.35.Surface



ZTA.70.Mains
Track.Wall Wash



ZTA.70.Surface