

Micro G-Cat

STD-000618-0001

Configured Product

CCT



2200K

Finish

Matt Black

Caterary Wire Diameter

4mm

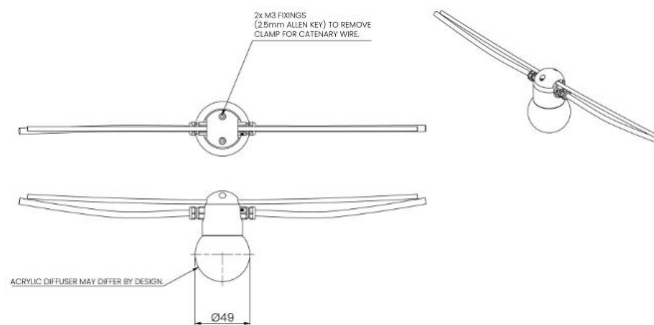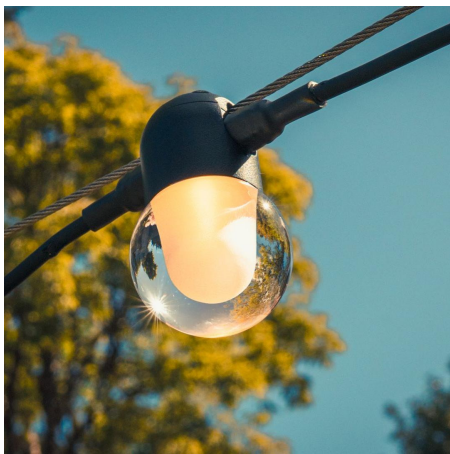


Miniature exterior catenary lighting system for enhancing outdoor spaces, pathways, terraces and intimate hospitality or high end residential environments.

Product Description

The Micro G-Cat is a compact IP66 rated exterior catenary lighting system, designed to deliver a refined decorative glow at a smaller scale. Developed as a more discreet companion to the successful Mini G-Cat, it offers elegant ambient illumination for outdoor applications where subtlety, atmosphere and visual comfort are key. Featuring a clear polished globe with an internally frosted diffuser, the Micro G-Cat creates a soft decorative presence while maintaining excellent durability for exterior use.

Key Features

- Sustainable construction: manufactured from recycled aluminium with durable anodised or powder coated finishes for long term exterior performance. Specialist finishes available on request.
- Decorative globe diffuser: clear polished globe with internally frosted finish for a soft, comfortable glow.
- Advanced dimming options: compatible with DALI, 0-10V, DMX and wireless dimming systems, with dimming down to 0.1%.
- High-quality light source: up to 95 CRI LED options for excellent colour rendition.
- Compact and discreet: smaller scale format ideal for more intimate architectural and landscape applications.
- Exterior rated: IP66 rated for reliable outdoor performance.

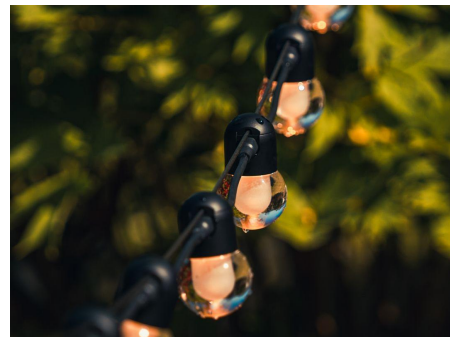

Compliance



Technical

Supply	Remote constant current LED driver required
Light source	Extended Type S
Initial output	95 CRI 2W 2.8Vf at 700mA 2700K · 179lm · 90lm/W 3000K · 192lm · 96lm/W 3500K · 204lm · 102lm/W 4000K · 219lm · 110lm/W
Light distribution	Decorative Globe 88.4°
Lumen maintenance	L70 B50 >66,000 hours
Colour consistency	2 SDCM
Colour maintenance	± 0.007 Δu'v'
IP rating	IP66
IK rating	IK10
Weight	0.2kg

Service Commitment

