



SL_ZTA.70 Pendant_9mm
COB_SL90_3000K_1908lm_Very
Narrow_11.1°

Delivered Output: 809 Lumen

Beam details



Beam details

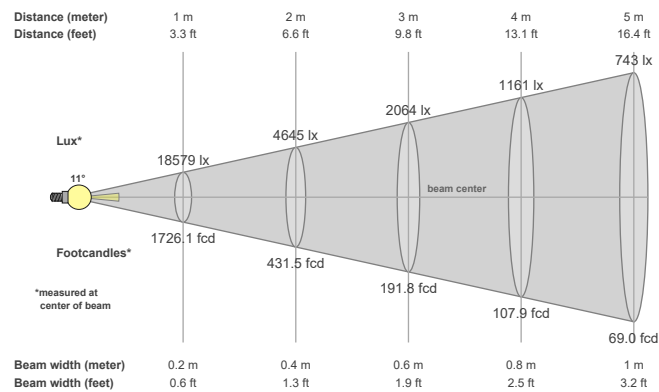

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
11.1°	17.5°	23.1°

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
18730 cd	98.2%	95.3%

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
18579lx	4645lx	2064lx	1161lx	743lx	516lx	379lx	290lx	229lx	186lx	154lx	129lx	110lx	95lx	83lx	73lx	64lx	57lx	51lx	46lx
1726.1fcd	431.5fcd	191.8fcd	107.9fcd	69fcd	47.9fcd	35.2fcd	27fcd	21.3fcd	17.3fcd	14.3fcd	12fcd	10.2fcd	8.8fcd	7.7fcd	6.7fcd	6fcd	5.3fcd	4.8fcd	4.3fcd

Stoane Lighting advise that lighting designers apply a +/- 5% tolerance allowance on the files we provide as subtle variations in system components (eg slight variations in output of LED light sources through a bin) and ambient temperature variations can effect output and distribution slightly.