



SL_ZTA.70 Pendant_9mm
COB_SL98_3000K_1288lm_Narrow
2_15.1°

Delivered Output: 1065 Lumen



Beam details

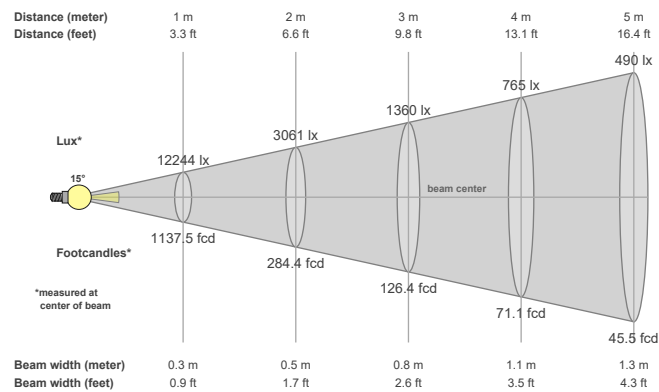

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
15.1°	26.6°	40.6°

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
12269 cd	99.4%	98.8%

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
12244lx	3061lx	1360lx	765lx	490lx	340lx	250lx	191lx	151lx	122lx	101lx	85lx	72lx	62lx	54lx	48lx	42lx	38lx	34lx	31lx
1137.5fcd	284.4fcd	126.4fcd	71.1fcd	45.5fcd	31.6fcd	23.2fcd	17.8fcd	14fcd	11.4fcd	9.4fcd	7.9fcd	6.7fcd	5.8fcd	5.1fcd	4.4fcd	3.9fcd	3.5fcd	3.2fcd	2.8fcd

Stoane Lighting advise that lighting designers apply a +/- 5% tolerance allowance on the files we provide as subtle variations in system components (eg slight variations in output of LED light sources through a bin) and ambient temperature variations can effect output and distribution slightly.