



SL_ZTA.70 Mains Track_6mm
COB_SL98_3000K_923lm_Very
Narrow_7.3°

Delivered Output: 407 Lumen

Beam details



Beam details

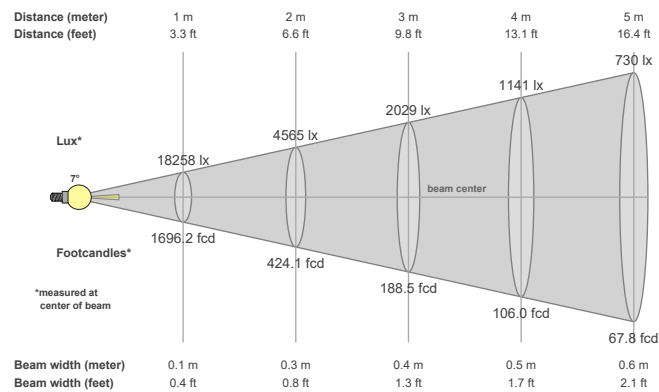

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%
7.3°	12.8°	17.2°

Peak intensity	Int. ratio in 120° cone	Int. ratio in 90° cone
18278 cd	96.6%	93.6%

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
18258lx	4565lx	2029lx	1141lx	730lx	507lx	373lx	285lx	225lx	183lx	151lx	127lx	108lx	93lx	81lx	71lx	63lx	56lx	51lx	46lx
1696.2fcd	424.1fcd	188.5fcd	106fcd	67.8fcd	47.1fcd	34.6fcd	26.5fcd	20.9fcd	17fcd	14fcd	11.8fcd	10fcd	8.7fcd	7.5fcd	6.6fcd	5.9fcd	5.2fcd	4.7fcd	4.2fcd

www.stoanelighting.com