



ZTA.50 - Adjustable Beam Framer

9mm COB 3000K SL98 - *narrowest adjustable setting*

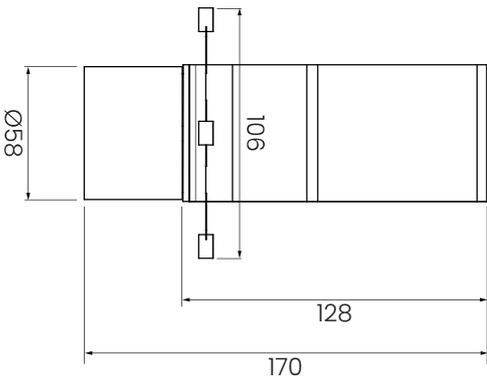

| | |
|--------------------|-----------------|
| Option 1 | Adjustable beam |
| Uniformity | 85% |
| TV Distortion | ≤0.5% |
| Beam Angle | 10° |
| Light output ratio | 16% |
| Light Source | 9mm 3000K SL98 |

| Distance | 1m | 2m | 3m | 4m | 5m |
|------------------------|-------|-------|-------|-------|-------|
| Beam Diameter | 0.2m | 0.3m | 0.5m | 0.9m | 0.9m |
| Max square side length | 0.14m | 0.21m | 0.35m | 0.63m | 0.63m |

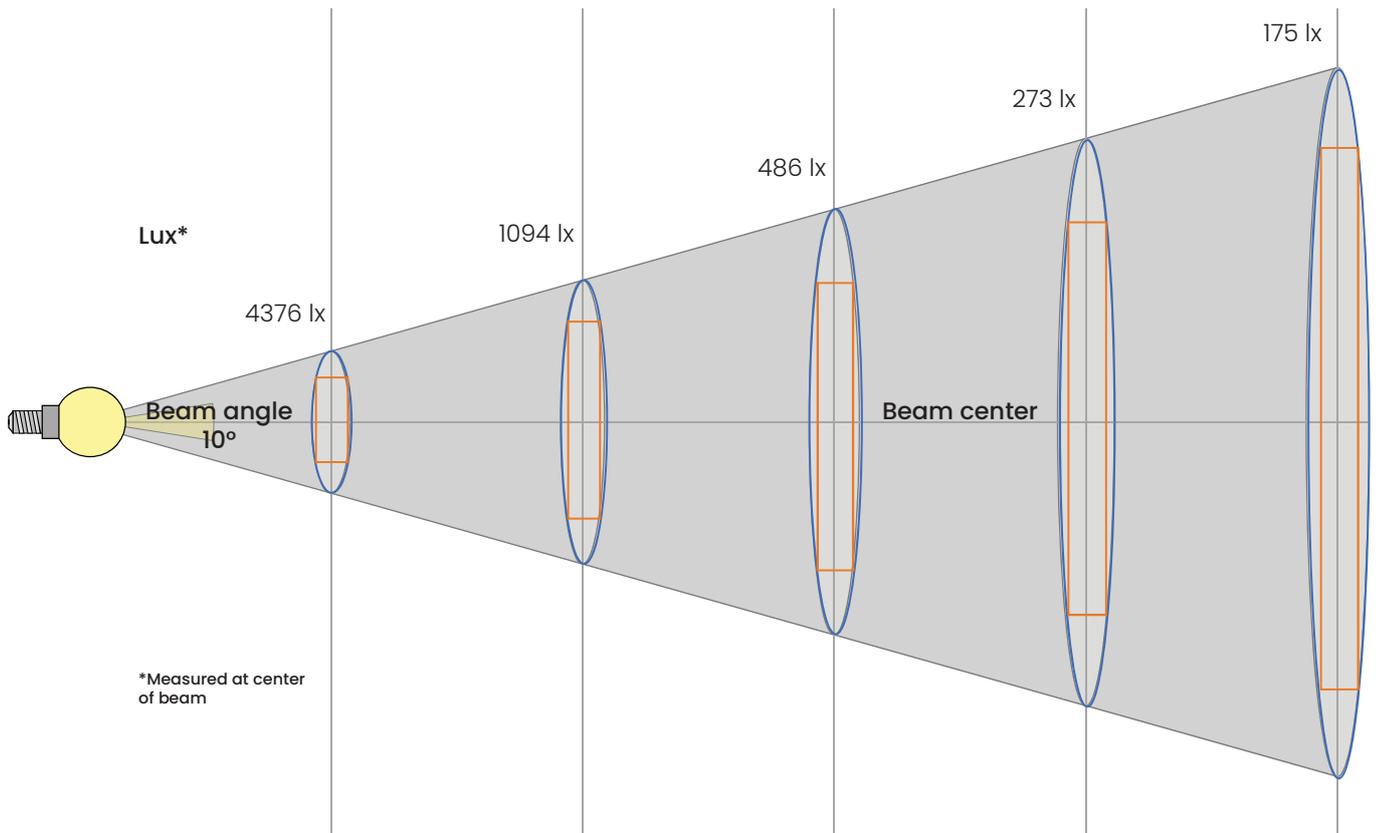

Beam intensities from 1-10m (before framing - i.e. Max beam diameter)

| 1m | 2m | 3m | 4m | 5m | 6m | 7m | 8m | 9m | 10m | Distance |
|------|------|-----|-----|-----|-----|----|----|----|-----|--------------|
| 4376 | 1094 | 486 | 273 | 175 | 122 | 89 | 68 | 54 | 44 | Luminus Flux |