



# ZTA.50 – Adjustable Beam Framer

9mm COB 3000K SL98 – *widest adjustable setting*

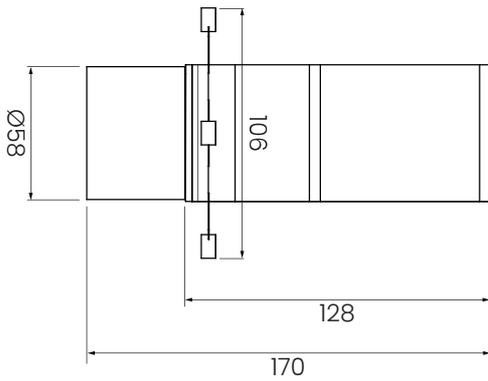

Option 1	Adjustable beam
Uniformity	85%
TV Distortion	≤0.5%
Beam Angle	28.9°
Light output ratio	36.3%
Light Source	9mm 3000K SL98

Distance	1m	2m	3m	4m	5m
Beam Diameter	0.5m	1m	1.5m	2.6m	2.6m
Max square side length	0.35m	0.7m	1.06m	1.83m	1.83m

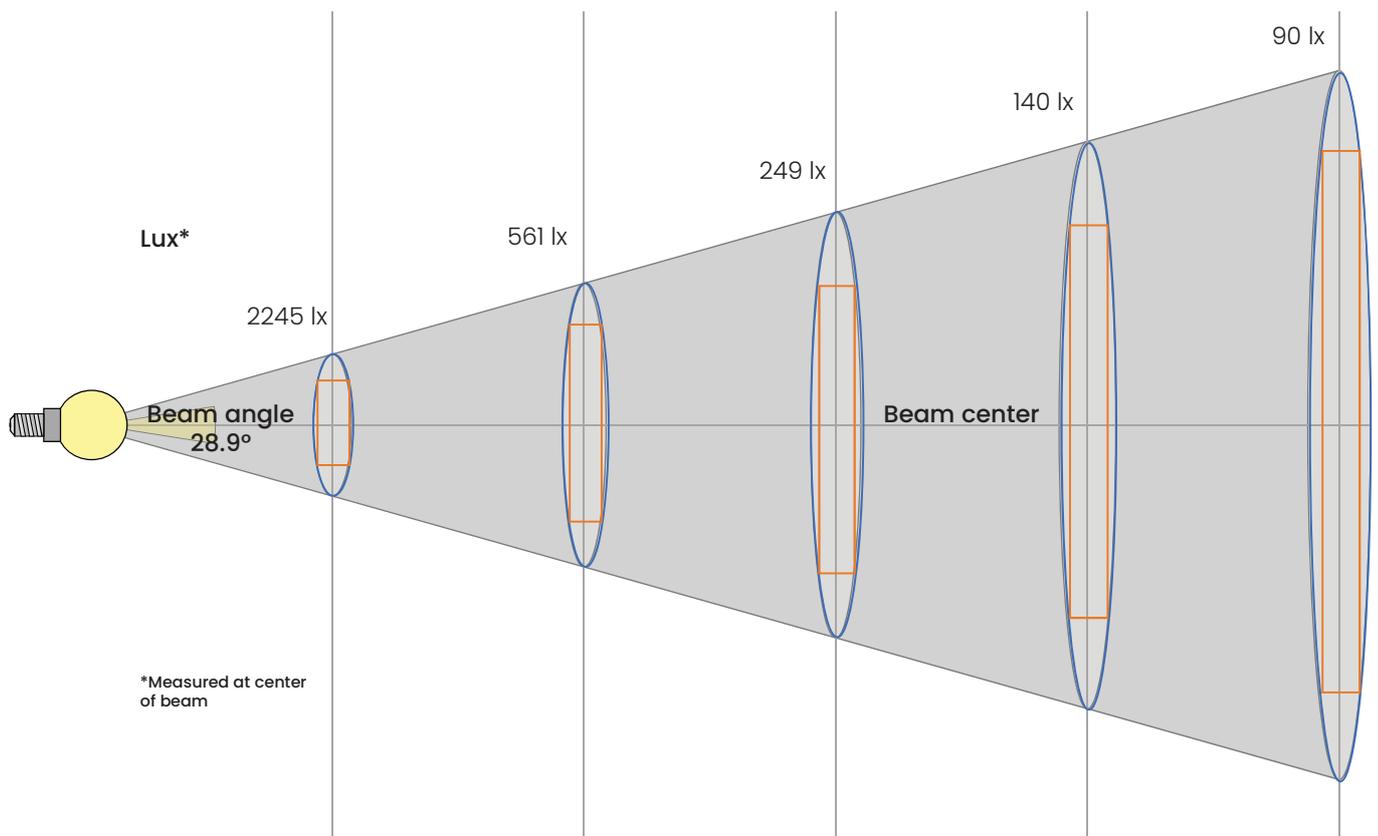

Beam intensities from 1-10m (before framing - i.e. Max beam diameter)

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	Distance
2245	561	249	140	90	62	46	35	28	22	Luminus Flux