



ZTA.50 - Adjustable Beam Framer

6mm COB 3000K SL98 - *narrowest adjustable setting*

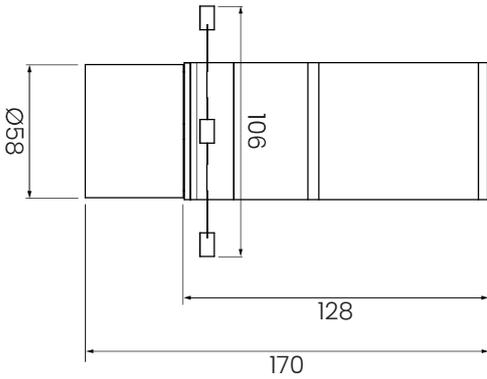

Option 1	Adjustable beam
Uniformity	85%
TV Distortion	≤0.5%
Beam Angle	9.5°
Light output ratio	22.6%
Light Source	6mm 3000K SL98

Distance	1m	2m	3m	4m	5m
Beam Diameter	0.2m	0.3m	0.5m	0.8m	0.8m
Max square side length	0.14m	0.21m	0.35m	0.56m	0.56m

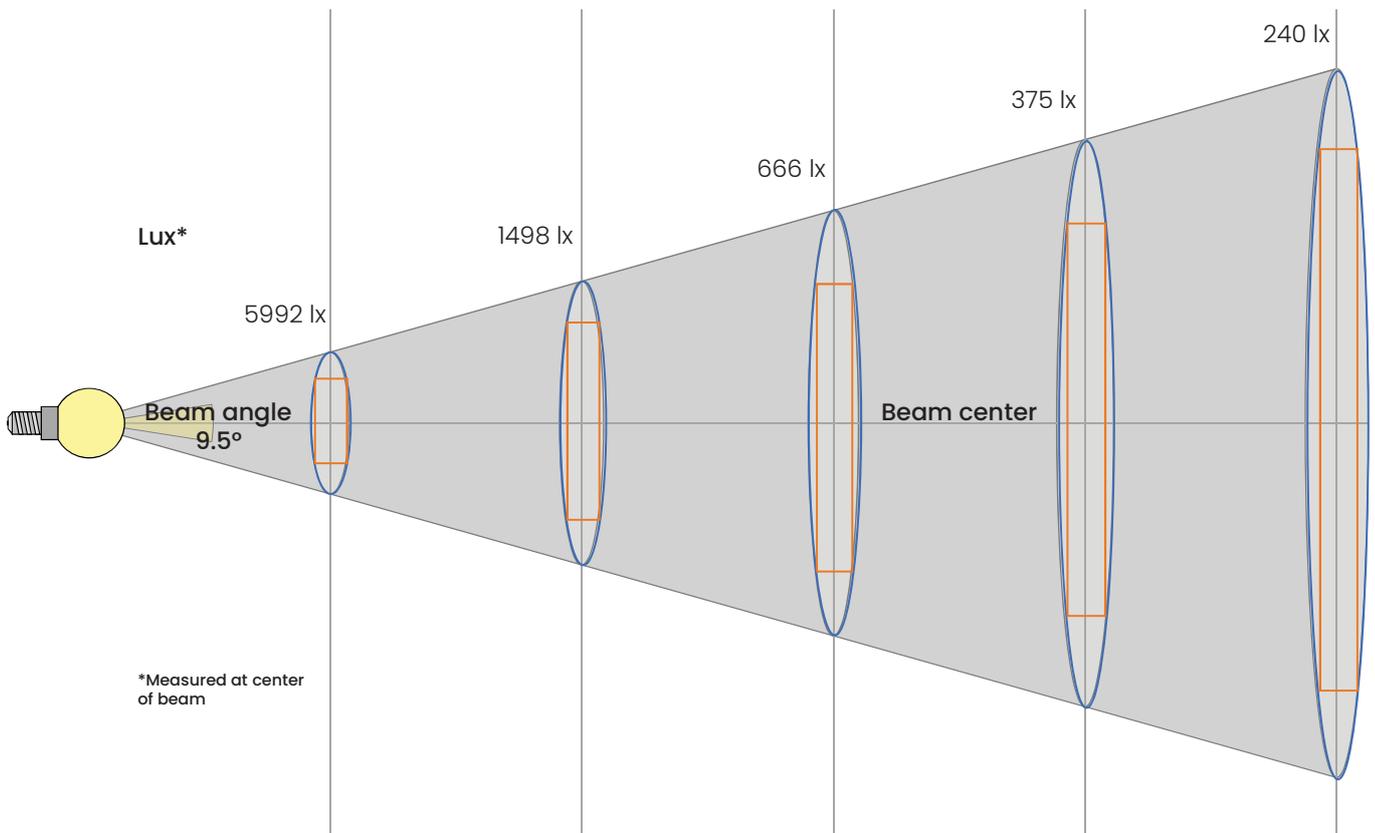

Beam intensities from 1-10m (before framing - i.e. Max beam diameter)

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	Distance
5992	1498	660	375	240	166	122	94	74	60	Luminus Flux