



ZTA.50 - Adjustable Beam Framer

6mm COB 3000K SL98 - *widest adjustable setting*

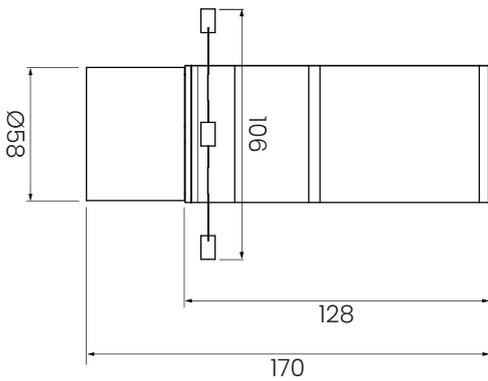

Option 1	Adjustable beam
Uniformity	85%
TV Distortion	≤0.5%
Beam Angle	33.1°
Light output ratio	56.5%
Light Source	6mm 3000K SL98

Distance	1m	2m	3m	4m	5m
Beam Diameter	0.6m	1.2m	1.8m	3m	3m
Max square side length	0.42m	0.84m	1.27m	2.12m	2.12m

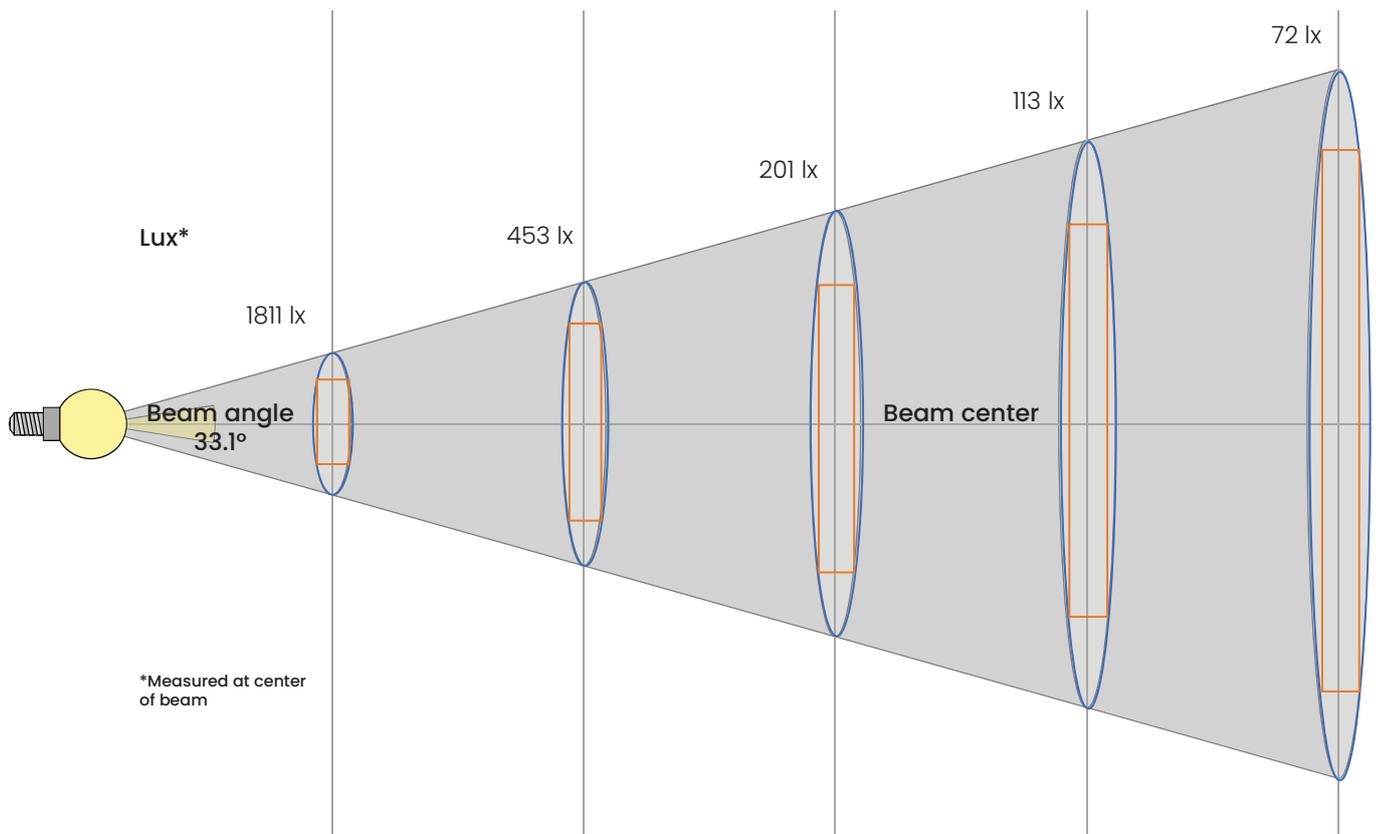

Beam intensities from 1-10m (before framing - i.e. Max beam diameter)

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	Distance
1811	453	201	113	72	50	37	28	22	18	Luminous Flux