



**ZTA.50 - Fixed Beam Framer**

6mm COB 3000K SL98

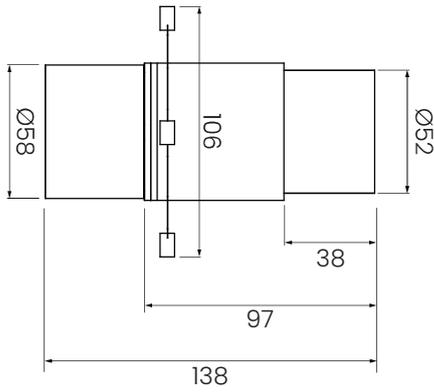

Option 2	Fixed beam
Uniformity	90%
TV Distortion	≤0.34%
Beam Angle	49.2°
Light output ratio	57.2%
Light Source	6mm 3000K SL98

Distance	1m	2m	3m	4m	5m
Beam Diameter	0.9m	1.8m	2.8m	4.6m	4.6m
Max square side length	0.63m	1.27m	1.97m	3.25m	3.25m

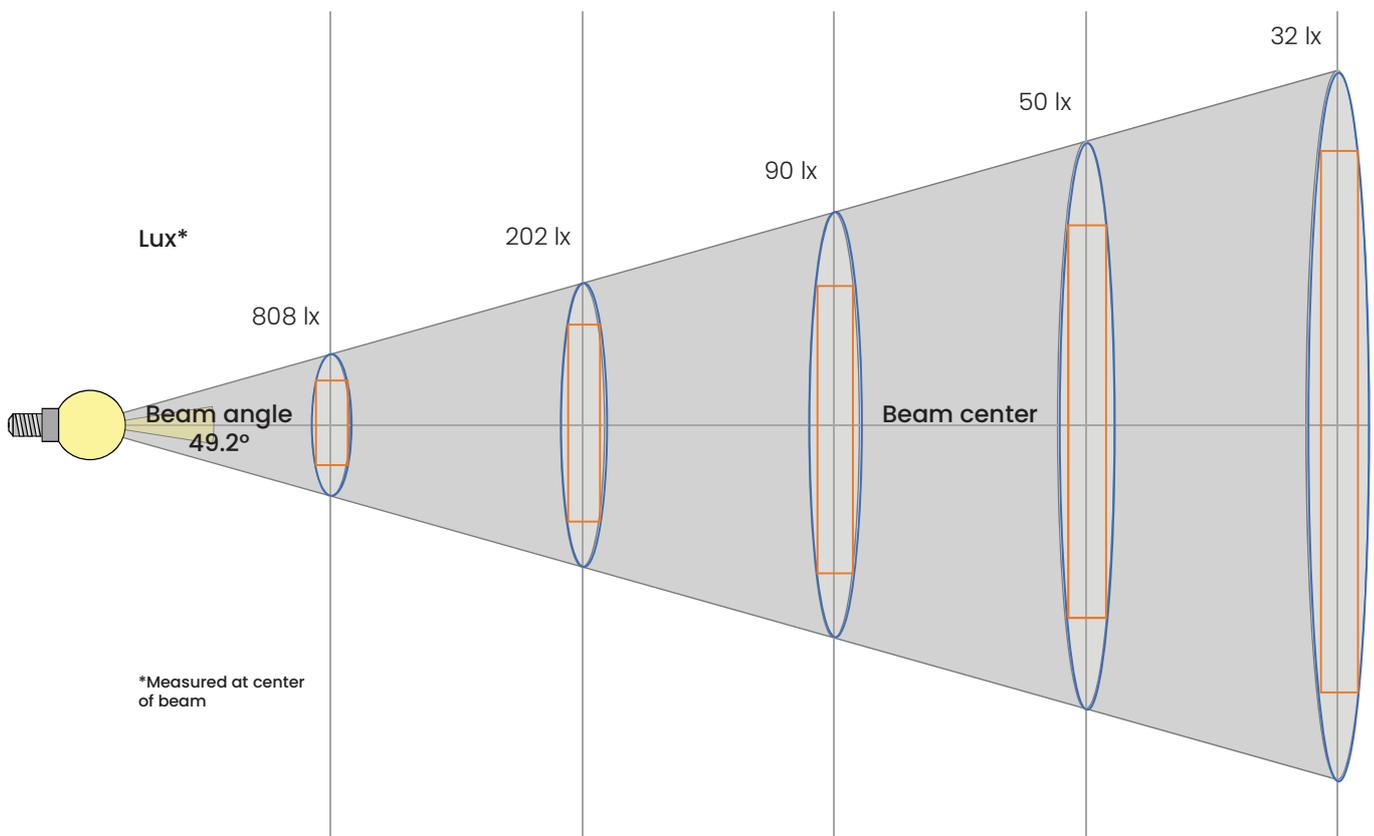

Beam intensities from 1-10m (before framing - i.e. Max beam diameter)

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	Distance
808	202	90	50	32	22	16	13	10	8	Luminus Flux