

LIFE CYCLE ASSESSMENT REPORT

For Type II Environmental Communications



Reference Product:

ZTA.70 Pendant
9mm_3000K_90CRI_Narrow

Life Cycle Assessment carried out in compliance with:

PEP Ecopassport PCR-ed4-EN-2021 09 06, supplemented by PSR-0014-ed2.0-EN2023 07 13

EN 50693:2019

EN 15804:2012+A2:2019

Date of issue: 31/10/2025

1. General Information

1.1. Company Information

Stoane Lighting

20 Dryden Road
Bilston Glen Industrial Estate
Loanhead
EH20 9LZ
United Kingdom

Website: <https://stoanelighting.com>

Telephone: +44 131 440 1313

Email: sales@mikestoanelighting.com

1.2. Product Information

Reference Product The reference product is one unit of ZTA.70 Pendant_9mm_3000K_90CRI_Narrow luminaire produced by Stoane Lighting. The reference product is equipped with a 9mm LED at 3000K, with a (delivered) lumen output of 1602.7 lm for a Narrow optic, and a dimmable control gear typically used with this type of product, specified according to rules in PSR-0014-ed2.0[1]. The technical properties of the reference product are summarised in Table 1.

Technical Characteristics

Table 1: Technical characteristics of the reference product

	Unit	Values for ZTA.70 Pendant_9mm_3000K_90CRI_Narrow
<i>Mass (excl. packaging)</i>	kg	0.816
<i>Mass (incl. packaging)</i>	kg	1.001
<i>Assigned lifetime</i>	h	100000
<i>LED light source lifetime (L70B50)</i>	h	100000
<i>Control gear lifetime</i>	h	50000
<i>Protection index for water and dust</i>	-	IP20
<i>CRI</i>	-	90
<i>Colour Temperature</i>	K	3000
<i>Light source diameter</i>	mm	9
<i>Optic option</i>	-	Narrow
<i>Declared operating voltage</i>	V	33.8
<i>Lumen output (initial)</i>	lm	1908.0
<i>Lumen output (delivered)</i>	lm	1602.7
<i>Power (light source)</i>	W	11.8
<i>Power (luminaire)</i>	W	14.84
<i>Luminous efficacy</i>	lm/W	135.8
<i>Light management function</i>	-	External light management system
<i>Energy saving coefficient</i>	-	0.5

Reference Lifetime The reference lifetime in years for this product is 25 years, which corresponds to the assigned lifetime of 100000 hours in a scenario where the product is operated for 4000 h/year. This value was selected as it corresponds to the highest available annual operating hours, according to guidelines in PSR-0014-ed2.0 (Table 2).

Table 2: Reference lifetime (years) based on use scenarios in different types of buildings.

Type of building	Annual operating hours (h)	Operational lifetime (years)
<i>Residential building</i>	3500	28.6
<i>Office</i>	2500	40
<i>Catering</i>	2500	40
<i>Sports establishments</i>	4000	25
<i>Industry</i>	4000	25

1.3. General information

Scope The scope of this report is cradle-to-grave with the addition of Module D, according to definition included in EN15804+A2.

Product category According to PSR-0014-ed2.0 the reference product belongs to the LED luminaire category, and it is equipped with an integrated replaceable LED module, for use with external control gear/power supply.

Declared Unit The declared unit (DU) is

To provide lighting that delivers an outgoing artificial luminous flux of 1602.7 lumens during a lifetime of 25 years.

Functional Unit The functional unit (FU) defined for comparative purposes applied in this PEP is

To provide lighting that delivers an outgoing artificial luminous flux of 1000 lumens during a reference lifetime of 35000 hours.

According to PSR-0014-ed2.0.

Reference Flow The following reference flow factor shall be used to convert the impacts from the declared unit level to the functional unit level:

$$\left(\frac{\text{luminous output}_{FU}}{\text{luminous output}_{DU}}\right) \times \left(\frac{\text{lifetime}_{FU}}{\text{lifetime}_{DU}}\right) = \left(\frac{1000 \text{ lm}}{1602.7 \text{ lm}}\right) \times \left(\frac{35000 \text{ h}}{100000 \text{ h}}\right) = 0.22$$

1.4. Homogeneous family

The reference product represents the “ZTA.70 Pendant” family, which includes products differing based on LED light source output, optic options, colour temperatures and Colour Rendering Index (CRI) values. The different optic and light source options do not require different or additional materials or modifications to the reference product’s structure, manufacturing operations or End of Life (EoL) treatments, only the power and/or delivered lumen output are affected. Therefore, the impact variations are only observable for the energy consumed during the use of the product (stage B6 of the product’s life cycle).

The criteria and ranges of variation for the homogeneous family are shown in Table 3.

Table 3: Criteria and minimum and maximum values of the ranges of variation for the homogeneous family, reported next to the values associated with the reference product.

Criteria	Unit	Value for the reference product	Minimum value in the family	Maximum value in the family
<i>Luminous output (initial)</i>	lm	1908.0	863.0	3280.0
<i>Typical power</i>	W	11.8	8.0	23.5
<i>Optic option</i>	-	Narrow	Very Narrow	Extra Wide Flood
<i>Colour temperature</i>	K	3000	2700	4000
<i>CRI</i>	-	90	90	98

This report is valid for all products included in the homogeneous family. The coefficients to be used to extrapolate the impacts for products in the family are reported in section 5.2.

2. Material Composition

2.1. Product

The materials contained in the product are shown in Table 4. The aluminium parts in the product consist of 70% secondary (post-consumer) material. The product's packaging consists of a cardboard box filled with shredded cardboard, reused by the company from previous shipments of goods.

Table 4: Material composition of the reference product.

Materials	Mass (kg)	Proportion (%)
Metals		
<i>Aluminium</i>	0.578	57.74
<i>Steel</i>	0.001	0.1
<i>Stainless steel</i>	0.001	0.1
	0.580	57.94
Plastics		
<i>Polycarbonate</i>	0.014	1.40
<i>Poly methyl methacrylate</i>	0.052	5.19
	0.066	6.59
Others (electronics)		
<i>LED</i>	0.0001	0.01
<i>Power supply</i>	0.127	12.69
<i>Cable</i>	0.042	4.20
	0.169	16.88
Packaging		
<i>Cardboard</i>	0.185	18.48
Total	1.001	100

3. Life Cycle stages

3.1. Manufacturing

Stoane Lighting sources components and materials from the closest geographical locations possible. Whilst local sourcing is possible for some raw materials, international sourcing is occasionally required especially for electrical/electronic components. Materials and components are processed and assembled at a single factory located in Edinburgh (Scotland). Except for some components (e.g. screws and bolts) which are purchased as finished products, all proprietary parts are manufactured by Stoane Lighting. The factory relies on an energy provider that ensures the provision of electricity from 100% renewable sources; however, for the purpose of this assessment, the electricity has been modelled using the standard Scottish electricity mix (renewable and non-renewable), as shown in Table 5.

Table 5: Average Scottish electricity mix (data from year 2020).

<i>Electricity source</i>	<i>Proportion (%)</i>
<i>electricity production, hydro</i>	11.45
<i>electricity production, wind, offshore</i>	8.75
<i>electricity production, wind, onshore</i>	32.75
<i>electricity production, oil</i>	1.25
<i>electricity production, natural gas</i>	9.85
<i>electricity production, nuclear</i>	29.95
<i>electricity production, photovoltaic</i>	0.85
<i>electricity, from municipal waste incineration</i>	5.15

After manufacturing, the product’s finished parts are transported by road using an electric van to local sites for finishing processes, and back to the manufacturing site, ready for final assembly and shipping.

All the manufacturing waste is collected and sent for recycling, except for some of the aluminium waste which is recycled in-house. This process consists of the aluminium waste smelting in an electric forge, which is then cast into a mould to produce new luminaire components. A scheme representing the main steps of the production processes is shown in

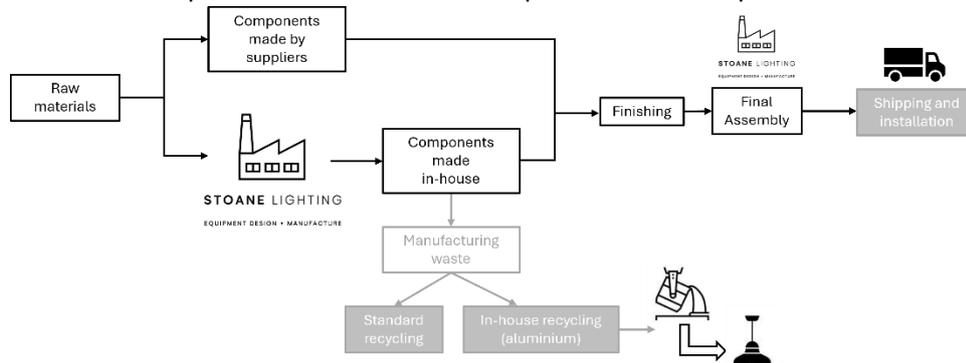


Figure 1.

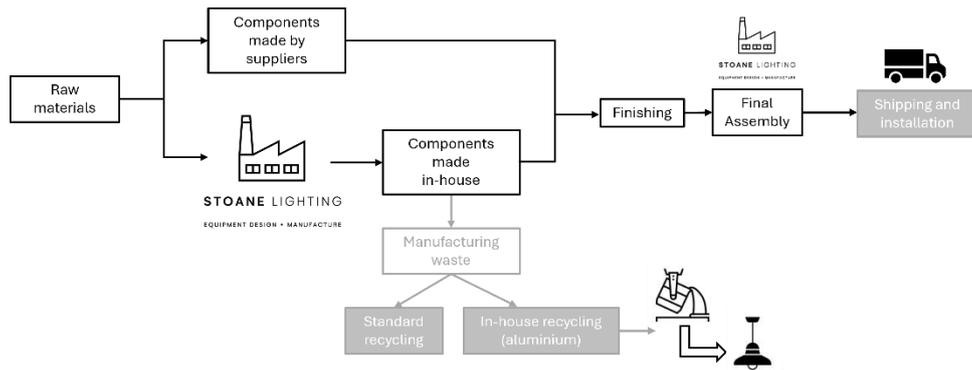


Figure 1: Scheme representing the main steps involved in the sourcing and manufacturing processes before the product is ready to be shipped to the customer.

Packaging associated with materials and components supplied to Stoane Lighting was considered as mostly made up of cardboard boxes, with a small amount of plastic wrapping in the packaging. The packaging mass was estimated as 5% of the total materials mass supplied to the manufacturer. The average composition of the packaging was 90% cardboard boxes and 10% polyethylene film.

3.2. Distribution

Stoane lighting manufactures for a global market but a distribution scenario has been created for markets in the United Kingdom (84%) and Europe (16%). This corresponds to an intracontinental distribution scenario according to PEP-PCR-ed4-EN2021 09 06, requiring a distance of 3500 km travelled by road. Average datasets for transportation by lorry (with average loading, including empty runs) were used to model the distribution stage.

3.3. Installation

The installation of the product can be carried out without the use of additional material or energy flows. The output of the installation stage is the disposal of packaging materials; this has been modelled using default values for Europe from PSR-0014-ED2.0- EN-2023 07 13.

3.4. Use

The product does not generate direct emissions (B1).

One round of maintenance (B2) has been included to account for one replacement of LED module and control gear (power supply) during the lifetime of the product, as shown in Table 6. This was modelled as taking place at the manufacturing site (Edinburgh), with a like-for-like replacement.

Table 6: Components for replacement during stage B2, with relative mass.

<i>Components for replacement</i>	<i>Mass (kg)</i>
<i>Power supply</i>	0.127
<i>LED Light source</i>	0.0001

Repairs (B3), replacements (B4) and refurbishments (B5) are not foreseen. The product does not need to consume water (B7).

Using luminaire consumes electricity (B6); the electricity mix has been calculated with contributions from the average mix in the United Kingdom (84%) and Europe (16%), as shown in Table 7.

Table 7: Data and parameters used to calculate the impact of stage B6.

<i>Datasets</i>	<i>Proportion (%)</i>	<i>Total electricity (kWh)</i>
<i>Market for low voltage electricity – GB mix</i>	84.3	625.3
<i>Market for low voltage electricity – Europe mix</i>	15.7	116.5

3.5. End of Life

The waste generated at the End of Life of the product is categorised as Waste from Electrical and Electronic Equipment (WEEE). As the market for this product has been identified as United Kingdom (84%) and Europe (16%), statistics from both regions applicable to WEEE treatment and disposal were used (Recolight, 2021) (Eurostat, 2021), shown in Table 8.

Table 8: Waste treatment rates applicable to luminaire products for United Kingdom and Europe.

<i>Location</i>	<i>Recycling (%)</i>	<i>Incineration (%)</i>	<i>Landfill (%)</i>	<i>Source</i>
<i>United Kingdom</i>	55	20	25	(Recolight, 2021)
<i>Europe</i>	32	3	65	(Eurostat, 2021)

3.6. Benefits and Loads beyond the system boundaries

Recycling materials at the End of Life of the product generates benefits by avoiding the production of new raw materials. Benefits and loads have been calculated considering the recycled materials listed in Table 9.

Table 9: Recycled materials used in the calculation of benefits and loads beyond the system boundaries (module D).

<i>Material</i>	<i>Unit</i>	<i>Value</i>
<i>Metals</i>	kg	0.809
<i>Plastics</i>	kg	0.035
<i>Others</i>	kg	0.068

4. Environmental Impacts

Software, databases and rules used for the calculation of the environmental impacts of the product are summarised in Table 10; Table 11 gives an overview of the life cycle stages considered in the study, in compliance with PEP-PSR-0014-Ed2.0-EN-2023 07 13.

Table 10: Key information regarding the LCA analysis.

<i>Information</i>	<i>Value</i>
<i>LCA Software</i>	OpenLCA 2.0.0
<i>LCA Database</i>	Ecoinvent 3.10 with EN 15804+A2 add-on

<i>Indicators</i>	Environmental, resource, waste and output according to EN 15804:2012+A2:2019
<i>PCR</i>	PEP-PCR–Ed4-EN-2021 09 06
<i>PSR</i>	PEP-PSR-0014-Ed2.0-EN-2023 07 13
<i>Functional Unit</i>	Provide lighting that delivers an outgoing artificial luminous flux of 1,000 lumens during a reference lifetime of 35,000 hours

Table 11: Life cycle stages considered in the LCA analysis.

<i>Life cycle stage</i>	<i>Meaning</i>	<i>Life cycle stage</i>	<i>Meaning</i>
A1	Material extraction	B2	Maintenance
A2	Transport to factory	B6	Energy in use
A3	Manufacturing	C2-C4	Waste transport, treatment and disposal
A4	Transport to site	D	Benefits and loads beyond End of Life
A5	Installation		

4.1. Results per Functional Unit

The following results of the environmental declaration have been developed by considering an outgoing artificial luminous flux of 1000 lumens over a reference lifetime of 35000 hours.

Table 12: Results of environmental impact indicators per Functional Unit.

<i>Indicator</i>	<i>Unit</i>	<i>Total (excl. D)</i>	<i>Prod. (A1-A3)</i>	<i>A1</i>	<i>A2</i>	<i>A3</i>	<i>A4</i>	<i>A5</i>	<i>Use (B1-B7)</i>	<i>B2</i>	<i>B6</i>	<i>C2-C4</i>	<i>D</i>
<i>Environment – mandatory</i>													
ADP-Elements	kg Sb eq	2.447E-03	1.817E-03	1.874E-03	1.109E-06	-5.805E-05	3.559E-07	1.106E-07	6.458E-04	8.463E-05	5.612E-04	-1.564E-05	2.352E-06
ADP-Fossil	MJ	2.149E+04	2.009E+04	2.009E+04	4.883E+00	1.128E+00	1.616E+00	4.049E-01	1.392E+03	1.846E+01	1.373E+03	-2.570E-01	1.831E+01
AP	mol H ⁺ eq	1.428E+01	1.406E+01	1.406E+01	1.611E-03	-2.637E-03	4.565E-04	1.303E-04	2.176E-01	9.350E-03	2.083E-01	-5.871E-04	7.592E-03
EP-Freshwater	kg P eq	6.797E-01	6.601E-01	6.603E-01	2.569E-05	-2.178E-04	8.042E-06	1.036E-05	1.961E-02	1.218E-03	1.839E-02	-6.112E-05	7.099E-04
EP-Marine	kg N eq	2.381E+00	2.336E+00	2.335E+00	6.303E-04	-1.453E-04	1.729E-04	8.262E-05	4.437E-02	2.032E-03	4.234E-02	2.417E-05	1.066E-03
EP-Terrestrial	mol N eq	2.476E+01	2.429E+01	2.428E+01	6.472E-03	-2.017E-03	1.845E-03	4.702E-04	4.702E-01	2.212E-02	4.480E-01	1.680E-04	9.671E-03
GWP-Biogenic	kg CO ₂ eq	4.908E+00	5.287E+00	5.277E+00	-7.447E-03	-2.768E-03	9.014E-05	8.703E-03	3.714E-01	-1.074E-03	3.725E-01	-9.261E-04	6.638E-03
GWP-Fossil	kg CO ₂ eq	2.151E+03	2.096E+03	2.096E+03	3.909E-01	-1.347E-01	1.110E-01	2.949E-02	5.412E+01	1.380E+00	5.274E+01	4.357E-02	1.178E+00
GWP-Land use	kg CO ₂ eq	6.178E+00	6.093E+00	6.091E+00	2.025E-04	2.212E-03	5.440E-05	2.097E-05	8.505E-02	1.705E-03	8.335E-02	-3.885E-05	2.932E-02
GWP-Total	kg CO ₂ eq	2.152E+03	2.097E+03	2.097E+03	3.836E-01	-1.352E-01	1.112E-01	3.822E-02	5.457E+01	1.381E+00	5.319E+01	4.260E-02	1.214E+00
ODP	kg CFC-11 eq	2.483E-05	2.126E-05	2.125E-05	1.919E-08	-1.220E-08	2.436E-09	2.902E-09	3.562E-06	8.715E-08	3.475E-06	1.923E-09	3.710E-08
POCP	kg NMVOC eq	7.637E+00	7.516E+00	7.515E+00	2.035E-03	-5.527E-04	6.779E-04	1.276E-04	1.202E-01	6.660E-03	1.135E-01	1.398E-04	4.169E-03
WDP	m3 world eq	5.419E+02	5.261E+02	5.261E+02	3.104E-02	5.377E-02	8.213E-03	1.173E-02	1.576E+01	3.691E-01	1.539E+01	-1.527E-02	2.436E+00
<i>Environment – optional</i>													
HT-Cancer	CTUh	2.771E-06	2.745E-06	2.745E-06	1.383E-10	-4.506E-10	5.029E-11	1.023E-11	2.227E-08	1.874E-09	2.040E-08	4.496E-09	3.963E-09
HT-Non Cancer	CTUh	3.984E-05	3.910E-05	3.913E-05	3.806E-09	-3.257E-08	1.147E-09	2.377E-10	7.277E-07	8.562E-08	6.421E-07	1.901E-08	3.666E-08
ETPF	CTUe	6.633E+03	6.513E+03	6.513E+03	2.183E+00	2.847E+00	7.890E-01	2.093E-01	1.202E+02	2.743E+01	9.272E+01	-3.054E-01	4.639E+00
PMF	disease inc.	1.775E-04	1.762E-04	1.762E-04	1.234E-08	-1.002E-08	9.862E-09	1.910E-09	1.037E-06	7.705E-08	9.604E-07	2.477E-07	8.970E-08
LULUC	-	4.060E+03	3.510E+03	3.510E+03	1.732E+00	1.734E+00	1.227E+00	1.527E-01	5.491E+02	8.714E+00	5.404E+02	-4.447E-01	1.235E+00
IRH	kBq U ²³⁵ eq	8.163E+01	3.615E+01	3.602E+01	9.795E-03	1.204E-01	2.212E-03	1.890E-03	4.548E+01	1.126E-01	4.537E+01	-4.046E-03	3.338E-01

Table 13: Results of resource use, waste, output and biogenic carbon per Functional Unit.

<i>Indicator</i>	<i>Unit</i>	<i>Total (excl. D)</i>	<i>Prod. (A1-A3)</i>	<i>A1</i>	<i>A2</i>	<i>A3</i>	<i>A4</i>	<i>A5</i>	<i>Use (B1-B7)</i>	<i>B2</i>	<i>B6</i>	<i>C2-C4</i>	<i>D</i>
<i>Resources</i>													
PENRE	MJ	2.104E+04	1.965E+04	1.964E+04	4.558E+00	1.067E+00	1.476E+00	3.979E-01	1.391E+03	1.790E+01	1.373E+03	-2.570E-01	1.765E+01
PENRM	MJ	4.492E+02	4.484E+02	4.481E+02	3.252E-01	6.143E-02	1.399E-01	6.988E-03	5.663E-01	5.663E-01	0.000E+00	1.654E-05	6.597E-01
PENRT	MJ	2.149E+04	2.009E+04	2.009E+04	4.883E+00	1.128E+00	1.616E+00	4.049E-01	1.392E+03	1.846E+01	1.373E+03	-2.570E-01	1.831E+01
PERE	MJ	2.384E+03	2.096E+03	2.095E+03	2.436E-01	6.700E-01	2.536E-02	4.786E-02	2.878E+02	1.438E+00	2.864E+02	-9.863E-02	7.691E+00
PERM	MJ	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
PERT	MJ	2.384E+03	2.096E+03	2.095E+03	2.436E-01	6.700E-01	2.536E-02	4.786E-02	2.878E+02	1.438E+00	2.864E+02	-9.863E-02	7.691E+00
FW	m ³	1.195E+01	1.151E+01	1.151E+01	1.162E-03	-2.490E-03	2.069E-04	5.188E-04	4.459E-01	1.116E-02	4.348E-01	-1.278E-03	5.335E-02
NRSF	MJ	4.406E+00	4.402E+00	4.296E+00	1.436E-04	1.065E-01	6.721E-04	-1.074E-06	1.493E-03	1.493E-03	0.000E+00	1.266E-03	5.459E-03

RSF	MJ	1.351E+00	1.350E+00	1.347E+00	1.776E-04	2.518E-03	4.772E-04	2.581E-06	1.117E-03	1.117E-03	0.000E+00	2.593E-06	5.669E-03
SM	kg	6.298E+00	6.294E+00	6.289E+00	7.644E-04	4.953E-03	1.793E-03	1.775E-05	4.050E-03	4.050E-03	0.000E+00	-1.898E-03	1.442E-02
Waste													
HWD	kg	3.434E+02	3.434E+02	3.434E+02	1.086E-03	4.240E-03	1.509E-03	2.699E-05	5.701E-03	4.517E-03	1.184E-03	-1.217E-04	2.996E-01
NHWD	kg	6.622E+01	6.173E+01	6.174E+01	4.815E-02	-5.305E-02	1.021E-01	8.988E-03	4.305E+00	3.996E-01	3.906E+00	7.230E-02	6.846E-02
RWD	kg	2.046E-02	8.930E-03	8.897E-03	7.164E-06	2.575E-05	5.375E-07	8.064E-07	1.153E-02	3.589E-05	1.149E-02	6.710E-07	8.845E-05
Output													
CRU	kg	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
MFR	kg	5.338E+00	5.319E+00	5.313E+00	6.709E-04	4.635E-03	1.568E-03	1.519E-05	5.669E-03	5.669E-03	0.000E+00	1.202E-02	1.291E-02
MER	kg	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
EE	MJ	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
Biogenic carbon content													
Biogenic carbon in packaging	kg	0.016											
Biogenic carbon in product	kg	0.00											

4.2. Results per unit of product

The following results have been developed considering one unit of ZTA.70 Pendant_9mm_3000K_90CRI_Narrow, with an outgoing artificial luminous flux of 1602.7 lumens over a reference lifetime of 100000 hours.

Table 14: Results of environmental impact indicators per unit of product (declared unit).

Indicator	Unit	Total (excl. D)	Prod. (A1-A3)	A1	A2	A3	A4	A5	Use (B1-B7)	B2	B6	C2-C4	D
Environment – mandatory													
ADP-Elements	kg Sb eq	1.121E-02	8.318E-03	8.579E-03	5.079E-06	-2.658E-04	1.630E-06	5.064E-07	2.957E-03	3.875E-04	2.570E-03	-7.162E-05	1.077E-05
ADP-Fossil	MJ	9.839E+04	9.201E+04	9.198E+04	2.236E+01	5.167E+00	7.400E+00	1.854E+00	6.373E+03	8.455E+01	6.289E+03	1.177E+00	8.383E+01
AP	mol H ⁺ eq	6.538E+01	6.438E+01	6.438E+01	7.377E-03	-1.207E-02	2.090E-03	5.966E-04	9.964E-01	4.281E-02	9.536E-01	-2.689E-03	3.477E-02
EP-Freshwater	kg P eq	3.112E+00	3.023E+00	3.024E+00	1.176E-04	-9.975E-04	3.683E-05	4.746E-05	8.979E-02	5.579E-03	8.421E-02	-2.799E-04	3.251E-03
EP-Marine	kg N eq	1.090E+01	1.070E+01	1.069E+01	2.886E-03	-6.654E-04	7.917E-04	3.783E-04	2.032E-01	9.303E-03	1.939E-01	1.107E-04	4.882E-03
EP-Terrestrial	mol N eq	1.134E+02	1.112E+02	1.112E+02	2.964E-02	-9.234E-03	8.446E-03	2.153E-03	2.153E+00	1.013E-01	2.052E+00	7.691E-04	4.428E-02
GWP-Biogenic	kg CO ₂ eq	-	-	-	-	-	-	-	-	-	-	-	-
GWP-Fossil	kg CO ₂ eq	2.247E+01	2.421E+01	2.416E+01	-3.410E-02	-1.267E-02	4.128E-04	3.985E-02	1.701E+00	-4.919E-03	1.706E+00	-4.241E-03	3.040E-02
GWP-Land use	kg CO ₂ eq	9.848E+03	9.599E+03	9.598E+03	1.790E+00	-6.168E-01	5.084E-01	1.350E-01	2.478E+02	6.320E+00	2.415E+02	1.995E-01	5.392E+00
GWP-Total	kg CO ₂ eq	2.829E+01	2.790E+01	2.789E+01	9.273E-04	1.013E-02	2.491E-04	9.601E-05	3.895E-01	7.807E-03	3.817E-01	-1.779E-04	1.343E-01
ODP	kg CFC-11 eq	9.854E+03	9.603E+03	9.602E+03	1.757E+00	-6.193E-01	5.091E-01	1.750E-01	2.499E+02	6.323E+00	2.436E+02	1.951E-01	5.557E+00
POCP	kg NMVOC eq	1.137E-04	9.734E-05	9.731E-05	8.789E-08	-5.587E-08	1.115E-08	1.329E-08	1.631E-05	3.991E-07	1.591E-05	8.807E-09	1.699E-07
WDP	m3 world eq	3.497E+01	3.442E+01	3.441E+01	9.319E-03	-2.531E-03	3.104E-03	5.841E-04	5.502E-01	3.050E-02	5.197E-01	6.402E-04	1.909E-02
Environment – optional													
HT-Cancer	CTUh	2.481E+03	2.409E+03	2.409E+03	1.422E-01	2.462E-01	3.761E-02	5.373E-02	7.215E+01	1.690E+00	7.046E+01	-6.994E-02	1.115E+01
HT-Non Cancer	CTUh	1.269E-05	1.257E-05	1.257E-05	6.332E-10	-2.064E-09	2.303E-10	4.686E-11	1.020E-07	8.582E-09	9.341E-08	2.059E-08	1.815E-08
ETPF	CTUe	1.825E-04	1.790E-04	1.792E-04	1.743E-08	-1.492E-07	5.252E-09	1.089E-09	3.332E-06	3.921E-07	2.940E-06	8.703E-08	1.679E-07
PMF	disease inc.	3.038E+04	2.982E+04	2.983E+04	9.995E+00	1.304E+01	3.613E+00	9.586E-01	5.502E+02	1.256E+02	4.246E+02	1.399E+00	2.124E+01
LULUC	-	8.126E-04	8.066E-04	8.066E-04	5.651E-08	-4.589E-08	4.516E-08	8.744E-09	4.751E-06	3.528E-07	4.398E-06	1.134E-06	4.107E-07
IRH	kBq U ²³⁵ eq	1.859E+04	1.607E+04	1.607E+04	7.932E+00	7.939E+00	5.620E+00	6.991E-01	2.514E+03	3.990E+01	2.475E+03	2.036E+00	5.654E+00

Table 15: Results of resource use, waste, output and biogenic carbon per unit of product (declared unit).

Indicator	Unit	Total (excl. D)	Prod. (A1-A3)	A1	A2	A3	A4	A5	Use (B1-B7)	B2	B6	C2-C4	D
Resources													
PENRE	MJ	9.634E+04	8.996E+04	8.994E+04	2.087E+01	4.885E+00	6.760E+00	1.822E+00	6.371E+03	8.196E+01	6.289E+03	-1.177E+00	8.082E+01
PENRM	MJ	2.057E+03	2.053E+03	2.052E+03	1.489E+00	2.813E-01	6.408E-01	3.200E-02	2.593E+00	2.593E+00	0.000E+00	7.576E-05	3.021E+00
PENRT	MJ	9.840E+04	9.202E+04	9.199E+04	2.236E+01	5.166E+00	7.401E+00	1.854E+00	6.373E+03	8.455E+01	6.289E+03	-1.177E+00	8.384E+01
PERE	MJ	1.092E+04	9.598E+03	9.594E+03	1.116E+00	3.068E+00	1.161E-01	2.192E-01	1.318E+03	6.587E+00	1.311E+03	-4.517E-01	3.522E+01
PERM	MJ	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
PERT	MJ	1.092E+04	9.598E+03	9.594E+03	1.116E+00	3.068E+00	1.161E-01	2.192E-01	1.318E+03	6.587E+00	1.311E+03	-4.517E-01	3.522E+01
FW	m ³	5.474E+01	5.270E+01	5.271E+01	5.320E-03	-1.140E-02	9.474E-04	2.376E-03	2.042E+00	5.111E-02	1.991E+00	-5.854E-03	2.443E-01
NRSF	MJ	2.017E+01	2.016E+01	1.967E+01	6.576E-04	4.877E-01	3.078E-03	-4.916E-06	6.838E-03	6.838E-03	0.000E+00	5.796E-03	2.500E-02

<i>RSF</i>	MJ	6.188E+00	6.181E+00	6.169E+00	8.135E-04	1.153E-02	2.185E-03	1.182E-05	5.115E-03	5.115E-03	0.000E+00	1.187E-05	2.596E-02
<i>SM</i>	kg	2.884E+01	2.882E+01	2.880E+01	3.500E-03	2.268E-02	8.211E-03	8.127E-05	1.855E-02	1.855E-02	0.000E+00	-8.690E-03	6.605E-02
<i>Waste</i>													
<i>HWD</i>	kg	1.573E+03	1.572E+03	1.572E+03	4.972E-03	1.942E-02	6.910E-03	1.236E-04	2.611E-02	2.068E-02	5.420E-03	-5.574E-04	1.372E+00
<i>NHWD</i>	kg	3.032E+02	2.827E+02	2.827E+02	2.205E-01	-2.429E-01	4.673E-01	4.116E-02	1.971E+01	1.830E+00	1.788E+01	3.311E-01	3.135E-01
<i>RWD</i>	kg	9.369E-02	4.089E-02	4.074E-02	3.281E-05	1.179E-04	2.461E-06	3.693E-06	5.279E-02	1.643E-04	5.263E-02	3.073E-06	4.050E-04
<i>Output</i>													
<i>CRU</i>	kg	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
<i>MFR</i>	kg	2.444E+01	2.435E+01	2.433E+01	3.072E-03	2.123E-02	7.181E-03	6.957E-05	2.596E-02	2.596E-02	0.000E+00	5.506E-02	5.914E-02
<i>MER</i>	kg	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
<i>EE</i>	MJ	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00	0.000E+00
<i>Biogenic carbon content</i>													
<i>Biogenic carbon in packaging</i>	kg	0.074											
<i>Biogenic carbon in product</i>	kg	0.00											

5. Extrapolation

5.1. Extrapolation rules

Extrapolations rules can be used to establish impacts of other products in the ZTA.70 Surface homogenous family and have been calculated following PCR-ed4-EN-2021 09 14 and PSR-0014-ed2.0-EN-2023 07 18. The defined rules shall be applied using the information provided in the following tables. The energy saving coefficient is the same across the homogeneous family.

Table 16: Extrapolation parameters of the reference product.

<i>Parameter</i>	<i>Unit</i>	<i>Value for reference product (ZTA.70 Surface_9mm_3000K_90CRI_Narrow)</i>
Lumen output (initial)	lm	1,908
Lumen output (delivered)	lm	1,602.7
Power (light source)	W	11.9
Power (luminaire)	W	15.1
Energy saving coefficient	-	0.5

The coefficients at the product level (declared unit) were calculated using the following formula:

$$\frac{\text{Power of concerned product (W)}}{\text{Power of reference product (W)}} \times \frac{\text{Energy saving coefficient of concerned product}}{\text{Energy saving coefficient of reference product}}$$

The coefficients at the functional unit level were calculated using the formula:

$$\text{Extrapolation coefficient at the product level} \times \frac{\text{Lighting output of reference product (lumen)}}{\text{Lighting output of product concerned (lumen)}}$$

5.2. Extrapolation coefficients

The reported extrapolation coefficients are intended to be applied to stage B6 only, as the variations in the homogeneous family are only significant in this stage. Therefore, extrapolation coefficients to be applied to other life cycle stages are equal to 1.

Table 17: Calculated extrapolation coefficients for stage B6, per Functional Unit.

Product	Coeff.	Product	Coeff.	Product	Coeff.	Product	Coeff.	Product	Coeff.	Product	Coeff.	Product	Coeff.
ZTA.70 Pendant_6_2700K_9 OCRI_Very Narrow	2.27	ZTA.70 Pendant_6_2700K_9 OCRI_Narrow	1.18	ZTA.70 Pendant_6_2700K_9OCRI _Narrow 2	1.18	ZTA.70 Pendant_6_2700K_9OCRI _Medium	1.22	ZTA.70 Pendant_6_2700K_90C RI_Flood	1.22	ZTA.70 Pendant_6_2700K_90C RI_Wide Flood	2.27	ZTA.70 Pendant_6_2700K_90C RI_Extra Wide Flood	2.27
ZTA.70 Pendant_6_3000K_9 OCRI_Very Narrow	2.18	ZTA.70 Pendant_6_3000K_9 OCRI_Narrow	1.13	ZTA.70 Pendant_6_3000K_9OCRI _Narrow 2	1.13	ZTA.70 Pendant_6_3000K_9OCRI _Medium	1.17	ZTA.70 Pendant_6_3000K_90C RI_Flood	1.17	ZTA.70 Pendant_6_3000K_90C RI_Wide Flood	2.18	ZTA.70 Pendant_6_3000K_90C RI_Extra Wide Flood	2.18
ZTA.70 Pendant_6_3500K_9 OCRI_Very Narrow	2.16	ZTA.70 Pendant_6_3500K_9 OCRI_Narrow	1.12	ZTA.70 Pendant_6_3500K_9OCRI _Narrow 2	1.12	ZTA.70 Pendant_6_3500K_9OCRI _Medium	1.16	ZTA.70 Pendant_6_3500K_90C RI_Flood	1.16	ZTA.70 Pendant_6_3500K_90C RI_Wide Flood	2.16	ZTA.70 Surface_6_3500K_90CR I_Extra Wide Flood	2.16
ZTA.70 Pendant_6_4000K_9 OCRI_Very Narrow	2.10	ZTA.70 Pendant_6_4000K_9 OCRI_Narrow	1.09	ZTA.70 Pendant_6_4000K_9OCRI _Narrow 2	1.09	ZTA.70 Pendant_6_4000K_9OCRI _Medium	1.13	ZTA.70 Pendant_6_4000K_90C RI_Flood	1.13	ZTA.70 Pendant_6_4000K_90C RI_Wide Flood	2.10	ZTA.70 Pendant_6_4000K_90C RI_Extra Wide Flood	2.10
ZTA.70 Pendant_6_2700K_9 8CRI_Very Narrow	3.08	ZTA.70 Pendant_6_2700K_9 8CRI_Narrow	1.59	ZTA.70 Pendant_6_2700K_98CRI _Narrow 2	1.59	ZTA.70 Pendant_6_2700K_98CRI _Medium	1.65	ZTA.70 Pendant_6_2700K_98C RI_Flood	1.65	ZTA.70 Pendant_6_2700K_98C RI_Wide Flood	3.08	ZTA.70 Pendant_6_2700K_98C RI_Extra Wide Flood	3.08
ZTA.70 Pendant_6_3000K_9 8CRI_Very Narrow	2.88	ZTA.70 Pendant_6_3000K_9 8CRI_Narrow	1.49	ZTA.70 Pendant_6_3000K_98CRI _Narrow 2	1.49	ZTA.70 Pendant_6_3000K_98CRI _Medium	1.54	ZTA.70 Pendant_6_3000K_98C RI_Flood	1.54	ZTA.70 Pendant_6_3000K_98C RI_Wide Flood	2.88	ZTA.70 Pendant_6_3000K_98C RI_Extra Wide Flood	2.88
ZTA.70 Pendant_6_3500K_9 8CRI_Very Narrow	2.88	ZTA.70 Pendant_6_3500K_9 8CRI_Narrow	1.49	ZTA.70 Pendant_6_3500K_98CRI _Narrow 2	1.49	ZTA.70 Pendant_6_3500K_98CRI _Medium	1.54	ZTA.70 Pendant_6_3500K_98C RI_Flood	1.54	ZTA.70 Pendant_6_3500K_98C RI_Wide Flood	2.88	ZTA.70 Pendant_6_3500K_98C RI_Extra Wide Flood	2.88
ZTA.70 Pendant_6_4000K_9 8CRI_Very Narrow	2.73	ZTA.70 Pendant_6_4000K_9 8CRI_Narrow	1.41	ZTA.70 Pendant_6_4000K_98CRI _Narrow 2	1.41	ZTA.70 Pendant_6_4000K_98CRI _Medium	1.46	ZTA.70 Pendant_6_4000K_98C RI_Flood	1.46	ZTA.70 Pendant_6_4000K_98C RI_Wide Flood	2.73	ZTA.70 Pendant_6_4000K_98C RI_Extra Wide Flood	2.73
ZTA.70 Pendant_9_2700K_9 OCRI_Very Narrow	2.09	ZTA.70 Pendant_9_2700K_9 OCRI_Narrow	1.05	ZTA.70 Pendant_9_2700K_9OCRI _Narrow 2	1.06	ZTA.70 Pendant_9_2700K_9OCRI _Medium	1.09	ZTA.70 Pendant_9_2700K_90C RI_Flood	1.09	ZTA.70 Pendant_9_2700K_90C RI_Wide Flood	2.09	ZTA.70 Pendant_9_2700K_90C RI_Extra Wide Flood	2.09
ZTA.70 Pendant_9_3000K_9 OCRI_Very Narrow	2.00	ZTA.70 Pendant_9_3000K_9 OCRI_Narrow	1.00	ZTA.70 Pendant_9_3000K_9OCRI _Narrow 2	1.01	ZTA.70 Pendant_9_3000K_9OCRI _Medium	1.04	ZTA.70 Pendant_9_3000K_90C RI_Flood	1.04	ZTA.70 Pendant_9_3000K_90C RI_Wide Flood	2.00	ZTA.70 Pendant_9_3000K_90C RI_Extra Wide Flood	2.00
ZTA.70 Pendant_9_3500K_9 OCRI_Very Narrow	1.98	ZTA.70 Pendant_9_3500K_9 OCRI_Narrow	0.99	ZTA.70 Pendant_9_3500K_9OCRI _Narrow 2	1.00	ZTA.70 Pendant_9_3500K_9OCRI _Medium	1.03	ZTA.70 Pendant_9_3500K_90C RI_Flood	1.03	ZTA.70 Pendant_9_3500K_90C RI_Wide Flood	1.98	ZTA.70 Pendant_9_3500K_90C RI_Extra Wide Flood	1.98
ZTA.70 Pendant_9_4000K_9 OCRI_Very Narrow	1.99	ZTA.70 Pendant_9_4000K_9 OCRI_Narrow	0.99	ZTA.70 Pendant_9_4000K_9OCRI _Narrow 2	1.01	ZTA.70 Pendant_9_4000K_9OCRI _Medium	1.03	ZTA.70 Pendant_9_4000K_90C RI_Flood	1.03	ZTA.70 Pendant_9_4000K_90C RI_Wide Flood	1.99	ZTA.70 Pendant_9_4000K_90C RI_Extra Wide Flood	1.99

ZTA.70 Pendant_9_2700K_9 8CRI_Very Narrow	2.84	ZTA.70 Pendant_9_2700K_9 8CRI_Narrow	1.42	ZTA.70 Pendant_9_2700K_98CRI _Narrow 2	1.44	ZTA.70 Pendant_9_2700K_98CRI _Medium	1.48	ZTA.70 Pendant_9_2700K_98C RI_Flood	1.48	ZTA.70 Pendant_9_2700K_98C RI_Wide Flood	2.84	ZTA.70 Pendant_9_2700K_98C RI_Extra Wide Flood	2.84
ZTA.70 Pendant_9_3000K_9 8CRI_Very Narrow	2.66	ZTA.70 Pendant_9_3000K_9 8CRI_Narrow	1.33	ZTA.70 Pendant_9_3000K_98CRI _Narrow 2	1.35	ZTA.70 Pendant_9_3000K_98CRI _Medium	1.38	ZTA.70 Pendant_9_3000K_98C RI_Flood	1.38	ZTA.70 Pendant_9_3000K_98C RI_Wide Flood	2.66	ZTA.70 Pendant_9_3000K_98C RI_Extra Wide Flood	2.66
ZTA.70_Pendant_9_3 500K_98CRI_Very Narrow	2.61	ZTA.70 Pendant_9_3500K_9 8CRI_Narrow	1.31	ZTA.70 Pendant_9_3500K_98CRI _Narrow 2	1.32	ZTA.70 Pendant_9_3500K_98CRI _Medium	1.35	ZTA.70 Pendant_9_3500K_98C RI_Flood	1.35	ZTA.70 Pendant_9_3500K_98C RI_Wide Flood	2.61	ZTA.70 Pendant_9_3500K_98C RI_Extra Wide Flood	2.61
ZTA.70 Pendant_9_4000K_9 8CRI_Very Narrow	2.54	ZTA.70 Pendant_9_4000K_9 8CRI_Narrow	1.27	ZTA.70 Pendant_9_4000K_98CRI _Narrow 2	1.28	ZTA.70 Pendant_9_4000K_98CRI _Medium	1.31	ZTA.70 Pendant_9_4000K_98C RI_Flood	1.31	ZTA.70 Pendant_9_4000K_98C RI_Wide Flood	2.54	ZTA.70 Pendant_9_4000K_98C RI_Extra Wide Flood	2.54
ZTA.70 Pendant_14_2700K_ 90CRI_Very Narrow	2.08	ZTA.70 Pendant_14_2700K_ 90CRI_Narrow	1.10	ZTA.70 Pendant_14_2700K_90C RI_Narrow 2	1.12	ZTA.70 Pendant_14_2700K_90C RI_Medium	1.15	ZTA.70 Pendant_14_2700K_90 CRI_Flood	1.15	ZTA.70 Pendant_14_2700K_90 CRI_Wide Flood	2.08	ZTA.70 Pendant_14_2700K_90 CRI_Extra Wide Flood	2.08
ZTA.70 Pendant_14_3000K_ 90CRI_Very Narrow	1.99	ZTA.70 Pendant_14_3000K_ 90CRI_Narrow	1.05	ZTA.70 Pendant_14_3000K_90C RI_Narrow 2	1.07	ZTA.70 Pendant_14_3000K_90C RI_Medium	1.09	ZTA.70 Pendant_14_3000K_90 CRI_Flood	1.09	ZTA.70 Pendant_14_3000K_90 CRI_Wide Flood	1.99	ZTA.70 Pendant_14_3000K_90 CRI_Extra Wide Flood	1.99
ZTA.70 Pendant_14_3500K_ 90CRI_Very Narrow	1.97	ZTA.70 Pendant_14_3500K_ 90CRI_Narrow	1.04	ZTA.70 Pendant_14_3500K_90C RI_Narrow 2	1.06	ZTA.70 Pendant_14_3500K_90C RI_Medium	1.08	ZTA.70 Pendant_14_3500K_90 CRI_Flood	1.08	ZTA.70 Pendant_14_3500K_90 CRI_Wide Flood	1.97	ZTA.70 Pendant_14_3500K_90 CRI_Extra Wide Flood	1.97
ZTA.70 Pendant_14_4000K_ 90CRI_Very Narrow	1.98	ZTA.70 Pendant_14_4000K_ 90CRI_Narrow	1.05	ZTA.70 Pendant_14_4000K_90C RI_Narrow 2	1.06	ZTA.70 Pendant_14_4000K_90C RI_Medium	1.09	ZTA.70 Pendant_14_4000K_90 CRI_Flood	1.09	ZTA.70 Pendant_14_4000K_90 CRI_Wide Flood	1.98	ZTA.70 Pendant_14_4000K_90 CRI_Extra Wide Flood	1.98
ZTA.70 Pendant_14_2700K_ 98CRI_Very Narrow	2.72	ZTA.70 Pendant_14_2700K_ 98CRI_Narrow	1.44	ZTA.70 Pendant_14_2700K_98C RI_Narrow 2	1.46	ZTA.70 Pendant_14_2700K_98C RI_Medium	1.49	ZTA.70 Pendant_14_2700K_98 CRI_Flood	1.49	ZTA.70 Pendant_14_2700K_98 CRI_Wide Flood	2.72	ZTA.70 Pendant_14_2700K_98 CRI_Extra Wide Flood	2.72
ZTA.70 Pendant_14_3000K_ 98CRI_Very Narrow	2.54	ZTA.70 Pendant_14_3000K_ 98CRI_Narrow	1.35	ZTA.70 Pendant_14_3000K_98C RI_Narrow 2	1.36	ZTA.70 Pendant_14_3000K_98C RI_Medium	1.40	ZTA.70 Pendant_14_3000K_98 CRI_Flood	1.40	ZTA.70 Pendant_14_3000K_98 CRI_Wide Flood	2.54	ZTA.70 Pendant_14_3000K_98 CRI_Extra Wide Flood	2.54
ZTA.70_Pendant_14_ 3500K_98CRI_Very Narrow	2.49	ZTA.70 Pendant_14_3500K_ 98CRI_Narrow	1.32	ZTA.70 Pendant_14_3500K_98C RI_Narrow 2	1.34	ZTA.70 Pendant_14_3500K_98C RI_Medium	1.37	ZTA.70 Pendant_14_3500K_98 CRI_Flood	1.37	ZTA.70 Pendant_14_3500K_98 CRI_Wide Flood	2.49	ZTA.70 Pendant_14_3500K_98 CRI_Extra Wide Flood	2.49
ZTA.70 Pendant_14_4000K_ 98CRI_Very Narrow	2.44	ZTA.70 Pendant_14_4000K_ 98CRI_Narrow	1.29	ZTA.70 Pendant_14_4000K_98C RI_Narrow 2	1.31	ZTA.70 Pendant_14_4000K_98C RI_Medium	1.34	ZTA.70 Pendant_14_4000K_98 CRI_Flood	1.34	ZTA.70 Pendant_14_4000K_98 CRI_Wide Flood	2.44	ZTA.70 Pendant_14_4000K_98 CRI_Extra Wide Flood	2.44

Table 18: Calculated extrapolation coefficients for stage B6, per unit of product (declared unit).

<i>Product</i>	<i>Coeff.</i>	<i>Product</i>	<i>Coeff.</i>	<i>Product</i>	<i>Coeff.</i>	<i>Product</i>	<i>Coeff.</i>	<i>Product</i>	<i>Coeff.</i>	<i>Product</i>	<i>Coeff.</i>	<i>Product</i>	<i>Coeff.</i>
ZTA.70 Pendant_6_2700K_9 OCRI_Very Narrow	0.68	ZTA.70 Pendant_6_2700K_9 OCRI_Narrow	0.68	ZTA.70 Pendant_6_2700K_90CRI _Narrow 2	0.68	ZTA.70 Pendant_6_2700K_90CRI _Medium	0.68	ZTA.70 Pendant_6_2700K_90C RI_Flood	0.68	ZTA.70 Pendant_6_2700K_90C RI_Wide Flood	0.68	ZTA.70 Pendant_6_2700K_90C RI_Extra Wide Flood	0.68
ZTA.70 Pendant_6_3000K_9 OCRI_Very Narrow	0.68	ZTA.70 Pendant_6_3000K_9 OCRI_Narrow	0.68	ZTA.70 Pendant_6_3000K_90CRI _Narrow 2	0.68	ZTA.70 Pendant_6_3000K_90CRI _Medium	0.68	ZTA.70 Pendant_6_3000K_90C RI_Flood	0.68	ZTA.70 Pendant_6_3000K_90C RI_Wide Flood	0.68	ZTA.70 Pendant_6_3000K_90C RI_Extra Wide Flood	0.68

ZTA.70 Pendant_6_3500K_9 OCRI_Very Narrow	0.68	ZTA.70 Pendant_6_3500K_9 OCRI_Narrow	0.68	ZTA.70 Pendant_6_3500K_90CRI _Narrow 2	0.68	ZTA.70 Pendant_6_3500K_90CRI _Medium	0.68	ZTA.70 Pendant_6_3500K_90C RI_Flood	0.68	ZTA.70 Pendant_6_3500K_90C RI_Wide Flood	0.68	ZTA.70 Surface_6_3500K_90CR I_Extra Wide Flood	0.68
ZTA.70 Pendant_6_4000K_9 OCRI_Very Narrow	0.68	ZTA.70 Pendant_6_4000K_9 OCRI_Narrow	0.68	ZTA.70 Pendant_6_4000K_90CRI _Narrow 2	0.68	ZTA.70 Pendant_6_4000K_90CRI _Medium	0.68	ZTA.70 Pendant_6_4000K_90C RI_Flood	0.68	ZTA.70 Pendant_6_4000K_90C RI_Wide Flood	0.68	ZTA.70 Pendant_6_4000K_90C RI_Extra Wide Flood	0.68
ZTA.70 Pendant_6_2700K_9 8CRI_Very Narrow	0.73	ZTA.70 Pendant_6_2700K_9 8CRI_Narrow	0.73	ZTA.70 Pendant_6_2700K_98CRI _Narrow 2	0.73	ZTA.70 Pendant_6_2700K_98CRI _Medium	0.73	ZTA.70 Pendant_6_2700K_98C RI_Flood	0.73	ZTA.70 Pendant_6_2700K_98C RI_Wide Flood	0.73	ZTA.70 Pendant_6_2700K_98C RI_Extra Wide Flood	0.73
ZTA.70 Pendant_6_3000K_9 8CRI_Very Narrow	0.73	ZTA.70 Pendant_6_3000K_9 8CRI_Narrow	0.73	ZTA.70 Pendant_6_3000K_98CRI _Narrow 2	0.73	ZTA.70 Pendant_6_3000K_98CRI _Medium	0.73	ZTA.70 Pendant_6_3000K_98C RI_Flood	0.73	ZTA.70 Pendant_6_3000K_98C RI_Wide Flood	0.73	ZTA.70 Pendant_6_3000K_98C RI_Extra Wide Flood	0.73
ZTA.70 Pendant_6_3500K_9 8CRI_Very Narrow	0.73	ZTA.70 Pendant_6_3500K_9 8CRI_Narrow	0.73	ZTA.70 Pendant_6_3500K_98CRI _Narrow 2	0.73	ZTA.70 Pendant_6_3500K_98CRI _Medium	0.73	ZTA.70 Pendant_6_3500K_98C RI_Flood	0.73	ZTA.70 Pendant_6_3500K_98C RI_Wide Flood	0.73	ZTA.70 Pendant_6_3500K_98C RI_Extra Wide Flood	0.73
ZTA.70 Pendant_6_4000K_9 8CRI_Very Narrow	0.73	ZTA.70 Pendant_6_4000K_9 8CRI_Narrow	0.73	ZTA.70 Pendant_6_4000K_98CRI _Narrow 2	0.73	ZTA.70 Pendant_6_4000K_98CRI _Medium	0.73	ZTA.70 Pendant_6_4000K_98C RI_Flood	0.73	ZTA.70 Pendant_6_4000K_98C RI_Wide Flood	0.73	ZTA.70 Pendant_6_4000K_98C RI_Extra Wide Flood	0.73
ZTA.70 Pendant_9_2700K_9 OCRI_Very Narrow	1.00	ZTA.70 Pendant_9_2700K_9 OCRI_Narrow	1.00	ZTA.70 Pendant_9_2700K_90CRI _Narrow 2	1.00	ZTA.70 Pendant_9_2700K_90CRI _Medium	1.00	ZTA.70 Pendant_9_2700K_90C RI_Flood	1.00	ZTA.70 Pendant_9_2700K_90C RI_Wide Flood	1.00	ZTA.70 Pendant_9_2700K_90C RI_Extra Wide Flood	1.00
ZTA.70 Pendant_9_3000K_9 OCRI_Very Narrow	1.00	ZTA.70 Pendant_9_3000K_9 OCRI_Narrow	1.00	ZTA.70 Pendant_9_3000K_90CRI _Narrow 2	1.00	ZTA.70 Pendant_9_3000K_90CRI _Medium	1.00	ZTA.70 Pendant_9_3000K_90C RI_Flood	1.00	ZTA.70 Pendant_9_3000K_90C RI_Wide Flood	1.00	ZTA.70 Pendant_9_3000K_90C RI_Extra Wide Flood	1.00
ZTA.70 Pendant_9_3500K_9 OCRI_Very Narrow	1.00	ZTA.70 Pendant_9_3500K_9 OCRI_Narrow	1.00	ZTA.70 Pendant_9_3500K_90CRI _Narrow 2	1.00	ZTA.70 Pendant_9_3500K_90CRI _Medium	1.00	ZTA.70 Pendant_9_3500K_90C RI_Flood	1.00	ZTA.70 Pendant_9_3500K_90C RI_Wide Flood	1.00	ZTA.70 Pendant_9_3500K_90C RI_Extra Wide Flood	1.00
ZTA.70 Pendant_9_4000K_9 OCRI_Very Narrow	1.00	ZTA.70 Pendant_9_4000K_9 OCRI_Narrow	1.00	ZTA.70 Pendant_9_4000K_90CRI _Narrow 2	1.00	ZTA.70 Pendant_9_4000K_90CRI _Medium	1.00	ZTA.70 Pendant_9_4000K_90C RI_Flood	1.00	ZTA.70 Pendant_9_4000K_90C RI_Wide Flood	1.00	ZTA.70 Pendant_9_4000K_90C RI_Extra Wide Flood	1.00
ZTA.70 Pendant_9_2700K_9 8CRI_Very Narrow	0.90	ZTA.70 Pendant_9_2700K_9 8CRI_Narrow	0.90	ZTA.70 Pendant_9_2700K_98CRI _Narrow 2	0.90	ZTA.70 Pendant_9_2700K_98CRI _Medium	0.90	ZTA.70 Pendant_9_2700K_98C RI_Flood	0.90	ZTA.70 Pendant_9_2700K_98C RI_Wide Flood	0.90	ZTA.70 Pendant_9_2700K_98C RI_Extra Wide Flood	0.90
ZTA.70 Pendant_9_3000K_9 8CRI_Very Narrow	0.90	ZTA.70 Pendant_9_3000K_9 8CRI_Narrow	0.90	ZTA.70 Pendant_9_3000K_98CRI _Narrow 2	0.90	ZTA.70 Pendant_9_3000K_98CRI _Medium	0.90	ZTA.70 Pendant_9_3000K_98C RI_Flood	0.90	ZTA.70 Pendant_9_3000K_98C RI_Wide Flood	0.90	ZTA.70 Pendant_9_3000K_98C RI_Extra Wide Flood	0.90
ZTA.70_Pendant_9_3 500K_98CRI_Very Narrow	0.90	ZTA.70 Pendant_9_3500K_9 8CRI_Narrow	0.90	ZTA.70 Pendant_9_3500K_98CRI _Narrow 2	0.90	ZTA.70 Pendant_9_3500K_98CRI _Medium	0.90	ZTA.70 Pendant_9_3500K_98C RI_Flood	0.90	ZTA.70 Pendant_9_3500K_98C RI_Wide Flood	0.90	ZTA.70 Pendant_9_3500K_98C RI_Extra Wide Flood	0.90
ZTA.70 Pendant_9_4000K_9 8CRI_Very Narrow	0.90	ZTA.70 Pendant_9_4000K_9 8CRI_Narrow	0.90	ZTA.70 Pendant_9_4000K_98CRI _Narrow 2	0.90	ZTA.70 Pendant_9_4000K_98CRI _Medium	0.90	ZTA.70 Pendant_9_4000K_98C RI_Flood	0.90	ZTA.70 Pendant_9_4000K_98C RI_Wide Flood	0.90	ZTA.70 Pendant_9_4000K_98C RI_Extra Wide Flood	0.90
ZTA.70 Pendant_14_2700K_9 90CRI_Very Narrow	1.77	ZTA.70 Pendant_14_2700K_9 90CRI_Narrow	1.77	ZTA.70 Pendant_14_2700K_90C RI_Narrow 2	1.77	ZTA.70 Pendant_14_2700K_90C RI_Medium	1.77	ZTA.70 Pendant_14_2700K_90 CRI_Flood	1.77	ZTA.70 Pendant_14_2700K_90 CRI_Wide Flood	1.77	ZTA.70 Pendant_14_2700K_90 CRI_Extra Wide Flood	1.77
ZTA.70 Pendant_14_3000K_9 90CRI_Very Narrow	1.77	ZTA.70 Pendant_14_3000K_9 90CRI_Narrow	1.77	ZTA.70 Pendant_14_3000K_90C RI_Narrow 2	1.77	ZTA.70 Pendant_14_3000K_90C RI_Medium	1.77	ZTA.70 Pendant_14_3000K_90 CRI_Flood	1.77	ZTA.70 Pendant_14_3000K_90 CRI_Wide Flood	1.77	ZTA.70 Pendant_14_3000K_90 CRI_Extra Wide Flood	1.77

ZTA.70 Pendant_14_3500K_90CRI_Very Narrow	1.77	ZTA.70 Pendant_14_3500K_90CRI_Narrow	1.77	ZTA.70 Pendant_14_3500K_90CRI_Narrow 2	1.77	ZTA.70 Pendant_14_3500K_90CRI_Medium	1.77	ZTA.70 Pendant_14_3500K_90CRI_Flood	1.77	ZTA.70 Pendant_14_3500K_90CRI_Wide Flood	1.77	ZTA.70 Pendant_14_3500K_90CRI_Extra Wide Flood	1.77
ZTA.70 Pendant_14_4000K_90CRI_Very Narrow	1.77	ZTA.70 Pendant_14_4000K_90CRI_Narrow	1.77	ZTA.70 Pendant_14_4000K_90CRI_Narrow 2	1.77	ZTA.70 Pendant_14_4000K_90CRI_Medium	1.77	ZTA.70 Pendant_14_4000K_90CRI_Flood	1.77	ZTA.70 Pendant_14_4000K_90CRI_Wide Flood	1.77	ZTA.70 Pendant_14_4000K_90CRI_Extra Wide Flood	1.77
ZTA.70 Pendant_14_2700K_98CRI_Very Narrow	1.99	ZTA.70 Pendant_14_2700K_98CRI_Narrow	1.99	ZTA.70 Pendant_14_2700K_98CRI_Narrow 2	1.99	ZTA.70 Pendant_14_2700K_98CRI_Medium	1.99	ZTA.70 Pendant_14_2700K_98CRI_Flood	1.99	ZTA.70 Pendant_14_2700K_98CRI_Wide Flood	1.99	ZTA.70 Pendant_14_2700K_98CRI_Extra Wide Flood	1.99
ZTA.70 Pendant_14_3000K_98CRI_Very Narrow	1.99	ZTA.70 Pendant_14_3000K_98CRI_Narrow	1.99	ZTA.70 Pendant_14_3000K_98CRI_Narrow 2	1.99	ZTA.70 Pendant_14_3000K_98CRI_Medium	1.99	ZTA.70 Pendant_14_3000K_98CRI_Flood	1.99	ZTA.70 Pendant_14_3000K_98CRI_Wide Flood	1.99	ZTA.70 Pendant_14_3000K_98CRI_Extra Wide Flood	1.99
ZTA.70_Pendant_14_3500K_98CRI_Very Narrow	1.99	ZTA.70 Pendant_14_3500K_98CRI_Narrow	1.99	ZTA.70 Pendant_14_3500K_98CRI_Narrow 2	1.99	ZTA.70 Pendant_14_3500K_98CRI_Medium	1.99	ZTA.70 Pendant_14_3500K_98CRI_Flood	1.99	ZTA.70 Pendant_14_3500K_98CRI_Wide Flood	1.99	ZTA.70 Pendant_14_3500K_98CRI_Extra Wide Flood	1.99
ZTA.70 Pendant_14_4000K_98CRI_Very Narrow	1.99	ZTA.70 Pendant_14_4000K_98CRI_Narrow	1.99	ZTA.70 Pendant_14_4000K_98CRI_Narrow 2	1.99	ZTA.70 Pendant_14_4000K_98CRI_Medium	1.99	ZTA.70 Pendant_14_4000K_98CRI_Flood	1.99	ZTA.70 Pendant_14_4000K_98CRI_Wide Flood	1.99	ZTA.70 Pendant_14_4000K_98CRI_Extra Wide Flood	1.99

6. Additional Information

Stoane Lighting have carried out life cycle assessment of the reference product and produced this report such that the impacts associated with this product may be understood and information extracted from this report for other calculations by external stakeholders. Stoane lighting recognise both the power of information and the complexity, as such they would be happy to support anyone using this report with, for example: training on extracting relevant data, explanation of impact categories, use of extrapolation for homogenous family calculations, strategies for impact reduction and LCA terminology. Stoane Lighting support the use of life cycle assessment not only as a means for external third-party verified impact communication but also to measure impact and target reductions.

The study underlying this report has been carried out following rules outlined in PCR-ed4-EN-2021 09 14 and PSR-0014-ed2.0- EN-2023 07 18 by program operator PEP Ecopassport. The LCA has not been reviewed by an independent third party, therefore it does not meet the requirements of ISO 14025 for Type III environmental communications (or EPDs). Stoane Lighting would be happy to provide further information on the LCA study and the datasets used to any interested parties.