

ZTA.35.LV Track

STD-000555-0019

Configured Product

Light Source _____

SL90

Light Source Size _____

4mm LES

CCT _____

2700K

Beam _____

Narrow 13.6°

Finish _____


Matt Black

Track adaptor colour _____

White

Dimming _____

DALI

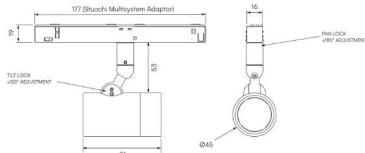

Modular high-performance, low voltage track-mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Easily interchangeable between Zoom and Fixed Optics

Product Description

ZTA.35.LV Track is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics.

Compatible with 48V Stucchi Multisystem EVO track, this spotlight includes integral dimming control gear.

The spotlight can accommodate up to two lens accessories with fixed optics or a single lens accessory with Zoom and multiple attachments, making it highly customisable for various lighting needs.

Key Features

- Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
- Fixed optics can be easily swapped to Zoom.
- Versatile adjustment: 360° pan rotation and 130° tilt with a lockable spot.
- Advanced dimming options: DALI, 0-10V, and Wireless dimming, down to 0.1%.
- High-performance lighting: up to 98 CRI LEDs with interchangeable optical systems.
- Customisable accessories: can house up to two lens accessories and various attachments.
- Ceiling mounting only: designed exclusively for ceiling installations.

Compliance



Technical

Supply 48V DC supply to Stucchi Multisystem EVO track

Light source 4mm LES COB 6mm LES COB

Initial output **SL90** 8.8W 35.1Vf at 250mA **SL90** 8W 32Vf at 250mA

2700K • 972lm • 111lm/W	2700K • 1087lm • 136lm/W
3000K • 1013lm • 115lm/W	3000K • 1133lm • 141lm/W
3500K • 1023lm • 116lm/W	3500K • 1144lm • 143lm/W
4000K • 1051lm • 120lm/W	4000K • 1175lm • 147lm/W

SL98 4.3W 17.2Vf at 250mA	SL98 8.6W 34.4Vf at 250mA
2700K • 418lm • 97lm/W	2700K • 863lm • 100lm/W
3000K • 446lm • 104lm/W	3000K • 923lm • 107lm/W
3500K • 446lm • 104lm/W	3500K • 923lm • 107lm/W
4000K • 471lm • 110lm/W	4000K • 974lm • 113lm/W

Light distribution Narrow 13.6° Narrow 17.8°
Medium 22° Medium 23°
Flood 35.4° Flood 34.6°
Wide Flood 52.8° Wide Flood 54.5°
Zoom 17.2° - 46.8° Zoom 21.6° - 44.9°

Lumen maintenance L90 B0 in excess of 94,000 hours

Colour consistency 2 SDCM

Colour maintenance $\pm 0.007 \Delta u'v'$

IP rating IP20

Weight 0.31kg

STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

ZTA.35.LV Track

STD-000555-0019

Service Commitment