STOANE
LIGHTING

ZTA.50.G-Stick

STD-000566-0016

Configured Product

Light Source

SL90

Light Source Size

14mm LES

CCT

2700K

Length

300mm

Finish

Matt Black

Dimming

Driver specific

Secondary Lensing Accessories


Without accessories

STOANE
LIGHTING

ZTA.50.G-Stick

STD-000566-0016



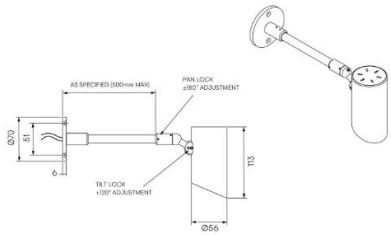

Modular high-performance, surface mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Product Description
ZTA.50.G-Stick is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. Dedicated Wall Wash optic for illuminating graphic displays.

Key Features
• Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
• Stem can be specified to length.
• Versatile adjustment: 363° pan rotation and 130° tilt with a lockable spot.
• High-performance lighting: up to 98 CRI LEDs.
• Customisable accessories: can house up to one lens accessory and various attachments.

Compliance

UK CA CE

C ETL US LISTED Intertek

STOANE LIGHTING

ZTA.50.G-Stick

STD-000566-0016

Technical

Supply	Remote constant current LED driver required
Light source	14mm LES COB
Initial output	**SL90** 11.7W 33.4Vf at 350mA 2700K • 1865lm • 159lm/W 3000K • 1953lm • 167lm/W 3500K • 1975lm • 169lm/W 4000K • 1963lm • 168lm/W **SL98** 13W 32.4Vf at 400mA 2400K • 1392lm • 107lm/W 2700K • 1573lm • 121lm/W 3000K • 1680lm • 130lm/W 3500K • 1714lm • 132lm/W 4000K • 1764lm • 136lm/W
Light distribution	Wall Wash 66.3° x 40.7°
Lumen maintenance	L90 B0 in excess of 94,000 hours
Colour consistency	2 SDCM
IP rating	IP20
Weight	0.5kg

STOANE
LIGHTING

ZTA.50.G-Stick

STD-000566-0016

Service Commitment



