

ZTA.50.Surface.Framer

STD-000592-0195

Configured Product

Light Source

SL90

Light Source Size

9mm LES

CCT

2700K

Supply

Constant Current

Finish

Matt Black

Framer type

Adjustable Beam

Dimming

Driver specific

Cable route

Through Base

Cable Length

500mm

Gobo Holder


No

Softening Diffuser/Accessory

# STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

|     |
|-----|
| Yes |
|-----|

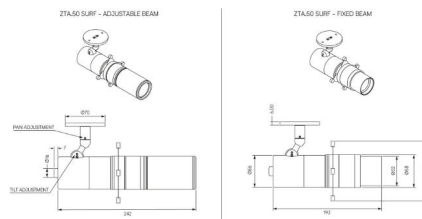

Modular high-performance, surface mounted spotlight system, for interior architectural applications such as Museums, Galleries and Retail. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

## Product Description

ZTA.50.Surface.Framer is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. Easily interchangeable between Framing projector, fixed optic, Wall Wash and Zoom options.

Fixed uses a Wide Flood spread for long throws. Adjustable uses a Zoom lens to allow the user to narrow in on very fine details. Both are capable of holding a gobo.

## Key Features

- Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish.
- Framing attachment can be easily swapped to fixed optics, Zoom and Wall Wash.
- The easy-to-adjust fins allow for precision positioning to sharply define light on pieces of artwork.
- Versatile adjustment: 363° pan rotation and 130° tilt with a lockable spot.
- High-performance lighting: up to 98 CRI LEDs with interchangeable optical systems.
- Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.

## Compliance



## Technical

|                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Supply         | Remote constant current LED driver required                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Light source   | 9mm LES COB                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Initial output | <div><div>SL9</div><div>SL98</div><div>10.6W</div><div>30.4Vf at</div><div>0 11.</div><div>350mA</div><div>8W</div><div>2400K · 1085lm ·</div><div>33.8</div><div>102lm/W</div><div>Vf at</div><div>2700K · 1205lm ·</div><div>350</div><div>113lm/W</div><div>mA</div><div>3000K · 1288lm ·</div><div>270</div><div>121lm/W</div><div>0K ·</div><div>3500K · 1313lm ·</div><div>1822</div><div>124lm/W</div><div>lm ·</div><div>4000K · 1352lm ·</div><div>154l</div><div>127lm/W</div><div>m/</div><div>W</div><div>300</div><div>0K ·</div><div>1908</div><div>lm ·</div><div>161l</div><div>m/</div><div>W</div><div>350</div><div>0K ·</div><div>1929</div><div>lm ·</div><div>163l</div><div>m/</div><div>W</div><div>400</div><div>0K</div><div>m · 1</div><div>919l</div><div>m · 1</div><div>62l</div></div> |

|                    |                                        |
|--------------------|----------------------------------------|
|                    | m/<br>W                                |
| Light distribution | Adjustable 10° to 28.9°<br>Fixed 49.3° |
| Lumen maintenance  | L90 B0 in excess of 94,000 hours       |
| Colour consistency | 2 SDCM                                 |
| IP rating          | IP20                                   |
| Weight             | 1kg                                    |

Service Commitment

