STOANE
LIGHTING

ZTA.50.LV Track.Wall Wash

STD-000561-0006

Configured Product

Light Source

SL90

Light Source Size

9mm LES

CCT

2700K

Finish

Matt Black

Track adaptor colour

White

Dimming

0-10V

Attachments

None

Secondary Lensing Accessories


Without accessories

STOANE LIGHTING

ZTA.50.LV Track.Wall Wash

STD-000561-0006



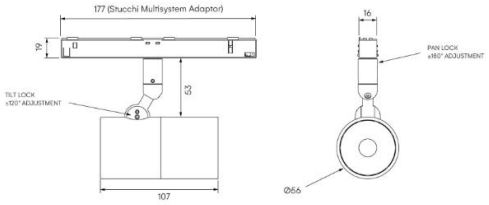

Modular high-performance, low voltage track-mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments.
Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Product Description
ZTA.50.LV Track.Wall Wash is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. Easily interchangeable between Zoom, Fixed optic and Framing projector options.

Key Features
• Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
• Fixed optics can be easily swapped to Zoom, Wall Wash and additional framer attachments.
• Versatile adjustment: 363° pan rotation and 130° tilt with a lockable spot.
• Advanced dimming options: DALI, 0-10V, and Wireless dimming, down to 0.1%.
• High-performance lighting: up to 98 CRI LEDs with interchangeable optical systems.
• Customisable accessories: can house up to two lens accessories and various attachments.
• Ceiling mounting only: designed exclusively for ceiling installations.

Compliance

UKCA CE

ETL LISTED c US Intertek

STOANE LIGHTING

ZTA.50.LV Track.Wall Wash

STD-000561-0006

Technical

Supply	48V supply to Stucchi Multisystem EVO track
Light source	9mm LES COB
Initial output	**SL90** 11.8W 33.8Vf at 350mA 2700K • 1822lm • 154lm/W 3000K • 1908lm • 161lm/W 3500K • 1929lm • 163lm/W 4000K • 1919lm • 162lm/W **SL98** 10.6W 30.4Vf at 350mA 2400K • 1085lm • 102lm/W 2700K • 1205lm • 113lm/W 3000K • 1288lm • 121lm/W 3500K • 1313lm • 124lm/W 4000K • 1352lm • 127lm/W
Light distribution	Wall Wash 75.6° x 30.5°
Lumen maintenance	L90 B0 in excess of 94,000 hours
Colour consistency	2 SDCM
IP rating	IP20
Weight	0.38kg

STOANE
LIGHTING

ZTA.50.LV Track.Wall Wash

STD-000561-0006

Service Commitment



