STOANE
LIGHTING

ZTA.70.LV Track.Wall Wash

STD-000583-0018

Configured Product

Light Source

SL90

CCT

2700K

Finish

Matt Black

Track adaptor colour

White

Dimming

0-10V

Secondary Lensing Accessories


Without accessories

STOANE
LIGHTING

ZTA.70.LV Track.Wall Wash

STD-000583-0018



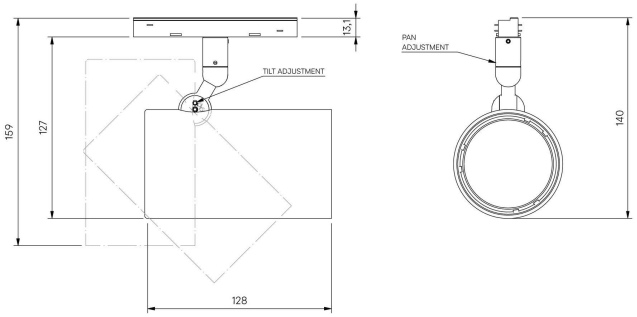

Modular high-performance, low voltage track-mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Product Description

ZTA.70.LV Track Wall Wash is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. Compatible with 48V Stucchi Multitsystem EVO track , this spotlight includes integral dimming control gear.

The spotlight can accommodate up to two lens accessories and multiple attachments, making it highly customisable for various lighting nee


Key Features

• Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
• Fixed optics can be easily swapped to decorative frosted diffuser options.
• Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.
• High-performance lighting: up to 98 CRI LEDs with interchangeable optical systems.
• Capable of ceiling, wall and table mounting.

STOANE
LIGHTING

ZTA.70.LV Track.Wall Wash

STD-000583-0018

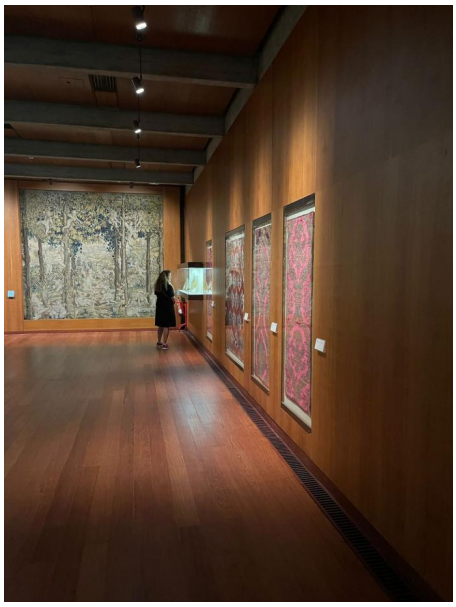

Compliance

STOANE LIGHTING

ZTA.70.LV Track.Wall Wash

STD-000583-0018

Technical

Supply	48V supply to Stucchi Multisystem EVO track
Light source	14mm LES COB
Initial output	**SL90** 17.2W 34.3Vf at 500mA 2700K • 2613lm • 152lm/W 3000K • 2736lm • 159lm/W 3500K • 2768lm • 161lm/W 4000K • 2751lm • 160lm/W **SL98** 18.1W 33Vf at 550mA 2400K • 1884lm • 104lm/W 2700K • 2129lm • 118lm/W 3000K • 2274lm • 126lm/W 3500K • 2337lm • 129lm/W 4000K • 2388lm • 132lm/W
Light distribution	Wall Wash 78.1° x 33.2°
Lumen maintenance	L90 B0 in excess of 94,000 hours
Colour consistency	2 SDCM
IP rating	IP20
Weight	0.75kg

STOANE
LIGHTING

ZTA.70.LV Track.Wall Wash

STD-000583-0018

Service Commitment



