

VCL.Clamp

STD-000598-0011

Configured Product

Light Source

SL90

CCT


2700K

Length

571.2mm

Finish

Anodised Clear

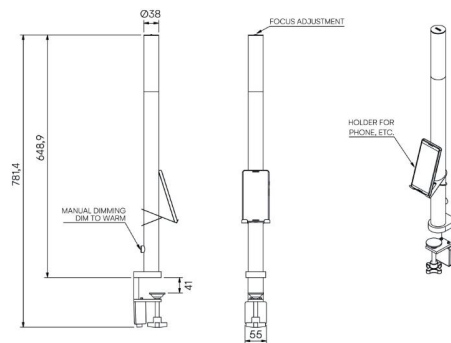

Flexible and portable task lighting system, designed to enhance the workspace in home working and office environments.

Product Description

The Video Conferencing Light has been designed and developed to address good quality task lighting for the home working and office environment. VCL.Clamp has a high quality glass base by which a device can rest in the dedicated groove. It is available in a choice of finishes, and some elements can be customised such as height and dimming. Includes toughened glass diffuser with adjustable kick reflector for soft distribution of light.

Key Features

- Optional phone cradle.
- Desktop and clamp versions available.
- Adjustable kick reflector to allow easy of adjustment of light effect from work surface to wall/ face during video conferencing.
- Sustainable construction: made from recycled aluminium with a long-lasting anodised finish. Specialist finishes such as stainless steel anodised effect or RAL finishes available on request.
- Advanced dimming options: On-board and Wireless dimming, down to 0.1%.

Compliance



Technical

Supply	Remote constant current LED driver required
Light source	9mm LES COB
Initial output	SL90 11.8W 33.8Vf at 350mA 2700K · 1822lm · 154lm/W 3000K · 1908lm · 161lm/W 3500K · 1929lm · 163lm/W 4000K · 1919lm · 162lm/W SL98 10.6W 30.4Vf at 350mA 2400K · 1085lm · 102lm/W 2700K · 1205lm · 113lm/W 3000K · 1288lm · 121lm/W 3500K · 1313lm · 124lm/W 4000K · 1352lm · 127lm/W
Light distribution	Even distribution 146.4° Full tilt distribution 172.1° Half tilt distribution 208.3°
Lumen maintenance	L90 B0 in excess of 94,000 hours
Colour consistency	2 SDCM
Colour maintenance	± 0.007 Δu'v'
IP rating	IP20
Weight	1.44kg

Service Commitment

