

FXD Type S

STD-000015-0062

Configured Product

CCT

2700K

Beam


Flood 36.7°

Finish

Anodised Clear

Mounting Method

Spring Clip

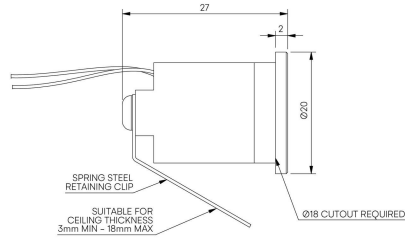

Miniature exterior recessed fixed focus uplight or downlight, for enhancing exterior architectural details.

Product Description

The FXD Type S is a miniature IP65 rated fixed exterior downlight. Machined from recycled aluminium with an anodised finish for enhanced durability and a toughened glass lens.

Key Features

- Sustainable construction: made from recycled aluminium with a long-lasting anodised finish. Specialist finishes available on request.
- Interchangeable optics to allow Medium to Wide Flood to elliptical beam options.
- Advanced dimming options: DALI, 0-10V, and Wireless dimming, down to 0.1%.
- High-performance lighting: up to 97 CRI LEDs.

Compliance



Technical

Supply	Remote constant current LED driver required
Light source	SL Type S
Initial output	95 CRI 1.4W 2.75Vf at 500mA 2700K · 139lm · 99lm/W 3000K · 148lm · 105lm/W 3500K · 158lm · 112lm/W 4000K · 169lm · 120lm/W
Light distribution	Medium 22.9° Flood 35.2° Wide Flood 50.7° Elliptical 21.7° x 33.3°
Lumen maintenance	L70 B50 >66,000 hours
Colour consistency	2 SDCM
Colour maintenance	± 0.007 Δu'v'
IP rating	IP65
Cut out	Ø18mm
Weight	18g

Service Commitment

