STOANE
LIGHTING

Iris Type S

STD-000071-0049

Configured Product

CCT

2200K

Beam

Flood 36.7°

Finish

Anodised Clear

Snoot Type

Slash Cut

Mounting Method


Spring Clip

STOANE LIGHTING

Iris Type S

STD-000071-0049



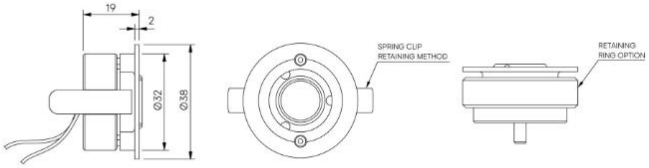

Miniature adjustable recessed lighting fixture for Museum, Gallery and Retail displays.

Product Description
The Iris Type S is an IP65 rated adjustable compact recessed and highly efficient fixture designed to provide precise illumination for Museum, Gallery and Retail applications. Iris Type S is suitable where an airtight seal is required.

Key Features
• Sustainable construction: made from recycled aluminium with a long-lasting anodised finish. Specialist finishes available on request.
• Fixed optics can be easily swapped for multiple beam options
• Snoot and Cowl options available.
• Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.
• High-performance lighting: up to 97 CRI LEDs

Compliance

UK CA CE

ETL C US Intertek

STOANE LIGHTING

Iris Type S

STD-000071-0049

Technical

Supply	Remote constant current LED driver required
Light source	SL Type S
Initial output	1.4W 2.8Vf at 500mA **80 CRI** 2200K • 116lm • 77lm/W **90 CRI** 2400K • 157lm • 115lm/W **95 CRI** 2700K • 125lm • 82lm/W 3000K • 133lm • 94lm/W 3500K • 140lm • 99lm/W 4000K • 148lm • 104lm/W
Light distribution	Medium 18.5° Flood 36.7° Wide Flood 54.1° Elliptical 17.1° x 34.5°
Lumen maintenance	L70 B50 >66,000 hours
Colour consistency	2 SDCM
Colour maintenance	± 0.007 Δu'v'
IP rating	IP66
Weight	0.041kg

STOANE
LIGHTING

Iris Type S

STD-000071-0049

Service Commitment



