

# Surf Type S

STD-000001-0080

## Configured Product

CCT

2700K

Beam


Very Narrow 12.5°

Finish

Anodised Clear

Cable route

Through Base

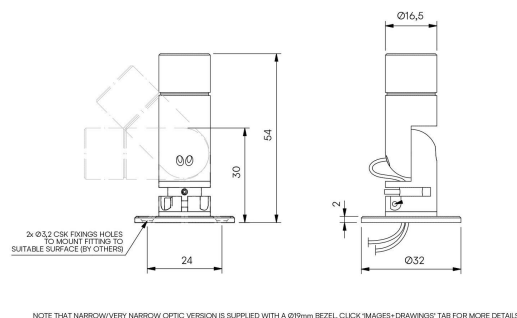

Miniature lighting fixture for Museum, Gallery and Retail displays.

## Product Description

The Surf Type S is a compact adjustable and highly efficient miniature fixture designed to provide precise illumination for Museum, Gallery and Retail applications.

Constructed from precision-machined recycled aluminium, the system features an anodised finish for enhanced durability and aesthetics.

## Key Features

- Sustainable construction: made from recycled aluminium with a long-lasting anodised finish. Specialist finishes available on request.
- Fixed interchangeable optics available ranging from Very narrow to Wide Flood to elliptical beam options.
- Lockable tilt and pan mechanisms.
- Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.
- High-performance lighting: up to 97 CRI LEDs



Compliance



Technical

|                    |                                                                                                                                            |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| Supply             | Remote constant current LED driver required                                                                                                |
| Light source       | SL Type S                                                                                                                                  |
| Initial output     | 95 CRI 1.4W 2.75Vf at 500mA<br><br>2700K · 139lm · 99lm/W<br>3000K · 148lm · 105lm/W<br>3500K · 158lm · 112lm/W<br>4000K · 169lm · 120lm/W |
| Light distribution | Very Narrow 12.5°<br>Narrow 15.7°<br>Medium 22.3°<br>Flood 40°<br>Wide Flood 54°<br>Elliptical 19.8° x 33.9°                               |
| Lumen maintenance  | L70 B50 >66,000 hours                                                                                                                      |
| Colour consistency | 2 SDCM                                                                                                                                     |
| Colour maintenance | ± 0.007 Δu'v'                                                                                                                              |
| IP rating          | IP20                                                                                                                                       |
| Weight             | 0.034kg                                                                                                                                    |

---

Service Commitment

