

# STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

## FXD Type S

STD-000015-0006

### Configured Product

CCT \_\_\_\_\_

2700K

Beam \_\_\_\_\_


TBC

Finish \_\_\_\_\_

TBC

Mounting Method \_\_\_\_\_

Mounting TBC

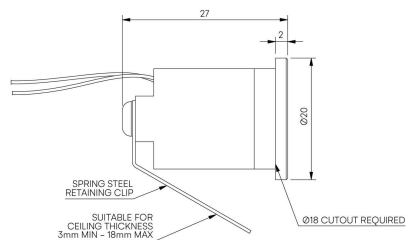

Miniature exterior recessed fixed focus downlight, for enhancing exterior architectural details.

## Product Description

The FXD Type S is a miniature IP65 rated fixed exterior downlight. Machined from recycled aluminium with an anodised finish for enhanced durability and a toughened glass lens.

## Key Features

- Sustainable construction: made from recycled aluminium with a long-lasting anodised finish. Specialist finishes available on request.
- Interchangeable optics to allow Medium to Wide Flood to elliptical beam options.
- Advanced dimming options: DALI, 0-10V, and Wireless dimming, down to 0.1%.
- High-performance lighting: up to 97 CRI LEDs.

## Compliance



## Technical

**Supply** Remote constant current LED driver required

**Light source** SL Type S

**Initial output** 95 CRI 1.4W 2.75Vf at  
500mA

2700K · 139lm · 99lm/W  
3000K · 148lm · 105lm/W  
3500K · 158lm · 112lm/W  
4000K · 169lm · 120lm/W

**Light distribution** Medium 22.9°  
Flood 35.2°  
Wide Flood 50.7°  
Elliptical 21.7° x 33.3°

**Lumen maintenance** L70 B50 >66,000 hours

**Colour consistency** 2 SDCM

**Colour maintenance**  $\pm 0.007 \Delta u'v'$

**IP rating** IP66

**Cut out**  $\varnothing 18\text{mm}$

**Weight** 0.39kg

**Service Commitment**

