

FXD Type S

STD-000015-0060

Configured Product

CCT

Custom

Beam


TBC

Finish

TBC

Mounting Method

Spring Clip

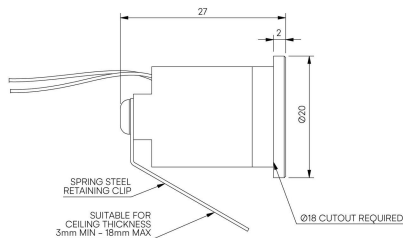

Miniature exterior recessed fixed focus uplight or downlight, for enhancing exterior architectural details.

Product Description

The FXD Type S is a miniature IP65 rated fixed exterior downlight. Machined from recycled aluminium with an anodised finish for enhanced durability and a toughened glass lens.

Key Features

- Sustainable construction: made from recycled aluminium with a long-lasting anodised finish. Specialist finishes available on request.
- Interchangeable optics to allow Medium to Wide Flood to elliptical beam options.
- Advanced dimming options: DALI, 0-10V, and Wireless dimming, down to 0.1%.
- High-performance lighting: up to 97 CRI LEDs.

Compliance



Technical

Supply	Remote constant current LED driver required
Light source	SL Type S
Initial output	95 CRI 1.4W 2.75Vf at 500mA 2700K · 139lm · 99lm/W 3000K · 148lm · 105lm/W 3500K · 158lm · 112lm/W 4000K · 169lm · 120lm/W
Light distribution	Medium 22.9° Flood 35.2° Wide Flood 50.7° Elliptical 21.7° x 33.3°
Lumen maintenance	L70 B50 >66,000 hours
Colour consistency	2 SDCM
Colour maintenance	± 0.007 Δu'v'
IP rating	IP65
Cut out	Ø18mm
Weight	18g

Service Commitment

