STOANE
LIGHTING

FXD Type S

STD-000015-0063

Configured Product

CCT

3000K

Beam

Flood 36.7°

Finish

Anodised Clear

Mounting Method


Stud Fixing

STOANE LIGHTING

FXD Type S

STD-000015-0063



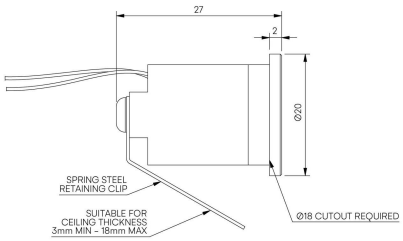

Miniature exterior recessed fixed focus uplight or downlight, for enhancing exterior architectural details.

Product Description
The FXD Type S is a miniature IP65 rated fixed exterior downlight. Machined from recycled aluminium with an anodised finish for enhanced durability and a toughened glass lens.

Key Features
• Sustainable construction: made from recycled aluminium with a long-lasting anodised finish. Specialist finishes available on request.
• Interchangeable optics to allow Medium to Wide Flood to elliptical beam options.
• Advanced dimming options: DALI, 0-10V, and Wireless dimming, down to 0.1%.
• High-performance lighting: up to 97 CRI LEDs.

Compliance

UK CA CE

STOANE LIGHTING

FXD Type S

STD-000015-0063

Technical

Supply	Remote constant current LED driver required
Light source	SL Type S
Initial output	1.4W 2.8Vf at 500mA **80 CRI** 2200K • 116lm • 77lm/W **90 CRI** 2400K • 157lm • 115lm/W **95 CRI** 2700K • 125lm • 88lm/W 3000K • 133lm • 94lm/W 3500K • 140lm • 99lm/W 4000K • 148lm • 104lm/W
Light distribution	Medium 18.5° Flood 36.7° Wide Flood 54.1° Elliptical 17.1° x 34.5°
Lumen maintenance	L70 B50 >66,000 hours
Colour consistency	2 SDCM
Colour maintenance	± 0.007 Δu'v'
IP rating	IP65
Cut out	Ø18mm
Weight	18g

STOANE
LIGHTING

FXD Type S

STD-000015-0063

Service Commitment



