STOANE
LIGHTING

# FXD Type S

STD-000015-0065

## Configured Product

CCT

3000K

Beam

Flood 36.7°

Finish

Anodised Clear

Mounting Method


Mounting TBC

STOANE LIGHTING

# FXD Type S

STD-000015-0065



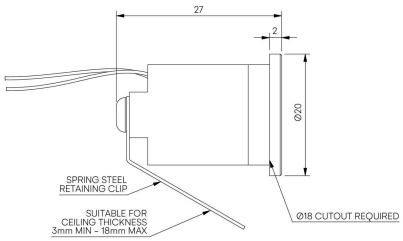


Miniature exterior recessed fixed focus uplight or downlight, for enhancing exterior architectural details.

**Product Description**
The FXD Type S is a miniature IP65 rated fixed exterior downlight. Machined from recycled aluminium with an anodised finish for enhanced durability and a toughened glass lens.

**Key Features**
• Sustainable construction: made from recycled aluminium with a long-lasting anodised finish. Specialist finishes available on request.
• Interchangeable optics to allow Medium to Wide Flood to elliptical beam options.
• Advanced dimming options: DALI, 0-10V, and Wireless dimming, down to 0.1%.
• High-performance lighting: up to 97 CRI LEDs.

## Compliance

UK CA CE

STOANE LIGHTING

# FXD Type S

STD-000015-0065

## Technical

| | |
|---|---|
| **Supply** | Remote constant current LED driver required |
| **Light source** | SL Type S |
| **Initial output** | 1.4W 2.8Vf at 500mA<br><br>**80 CRI**<br>2200K • 116lm • 77lm/W<br>**90 CRI**<br>2400K • 157lm • 115lm/W<br>**95 CRI**<br>2700K • 125lm • 88lm/W<br>3000K • 133lm • 94lm/W<br>3500K • 140lm • 99lm/W<br>4000K • 148lm • 104lm/W |
| **Light distribution** | Medium 18.5°<br>Flood 36.7°<br>Wide Flood 54.1°<br>Elliptical 17.1° x 34.5° |
| **Lumen maintenance** | L70 B50 >66,000 hours |
| **Colour consistency** | 2 SDCM |
| **Colour maintenance** | ± 0.007 Δu'v' |
| **IP rating** | IP65 |
| **Cut out** | Ø18mm |
| **Weight** | 18g |

STOANE
LIGHTING

# FXD Type S

STD-000015-0065

---

## Service Commitment

