

Indehandrail Module

STD-000018-0057

Configured Product

CCT

2700K

Finish



Brushed stainless steel

Secondary Lensing Accessories

With mask

Lens

Clear Glass

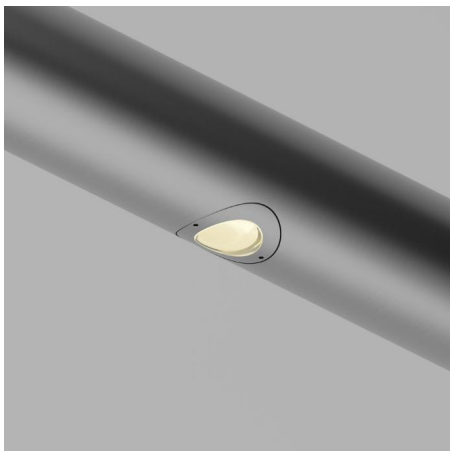


Compact LED module designed to be integrated into a handrail, providing safe and effective pathway illumination.

Product Description

The Indehandrail Module is a low-profile, high-performance lighting component with customised glass optics to provide a soft beam of light. Also available with a mask accessory to avoid light spill onto walls or balustrades. Constructed from precision-machined recycled aluminium, the system features an anodised and powder-coated finish for enhanced durability and aesthetics.

Key Features

- Sustainable construction: made from recycled aluminium with a weather resistant long-lasting anodised finish. Specialist finishes available on request.
- Stainless Steel, Brass and Bronze bezel options available on request.
- Specialist glass lenses for soft wide distribution and additional shield option to limit spill light.
- Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.
- High-performance lighting: up to 97 CRI LEDs

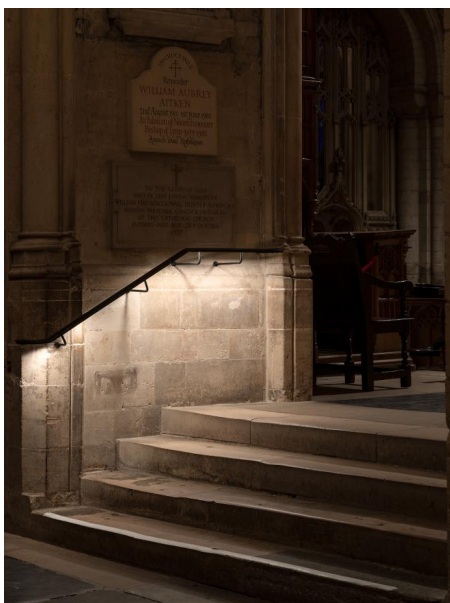

Compliance



Technical

Supply	Remote constant current LED driver required
Light source	SL Star
Initial output	95 CRI 2W 2.8Vf at 700mA 2700K · 179lm · 90lm/W 3000K · 192lm · 96lm/W 3500K · 204lm · 102lm/W 4000K · 219lm · 110lm/W
Light distribution	Clear glass, no mask 71.4° x 93.4° Clear glass, with mask 63.2° x 92.8° Diffused glass, no mask 74° x 85.4° Diffused glass, with mask 68.6° x 85.3°
Lumen maintenance	L70 B50 >66,000 hours
Colour consistency	2 SDCM
Colour maintenance	± 0.007 Δu'v'
IP rating	IP66
Weight	0.07kg
Cut out	Ø33mm

Service Commitment

