

Exterior LED Channel STD-000023-0011

Linear lighting system, typically for under seat, planter and handrail lighting applications.

Product Description


The Exterior LED Channel is a compact IP66 recycled aluminium extrusion, engineered to provide both subtle accent lighting or deliver brighter illumination within exterior seating, planter or handrail lighting applications.

The innovative extrusion design allows for ease of installation and the product can be offered with either a frosted diffuser with a soft glow effect, or a clear cover for higher output applications. Custom glare baffles and clamping system options available on request.

Fully encapsulated the product is designed with an innovative anti wick system to avoid water ingress.

Key Features

- Sustainable construction: made from recycled aluminium.
- Innovative mounting system allowing for ease of installation and maintenance.
- High and low output options available with a custom frosted diffuser for a soft lit effect or clear cover for higher output applications.
- Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.
- High-performance lighting: up to 90 CRI LEDs.
- Not suitable for in-ground applications.

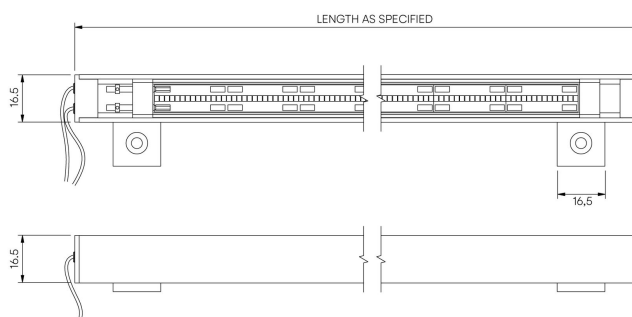

Exterior LED Channel STD-000023-0011

Configured Product

Light source

SL G3.2 Strip Standard Output

CCT

3000K

Length

Custom millimeter lengths possible. Maximum continuous length of a single section: 2000mm

TBC

Finish

Please contact us for custom finishing requirements

Anodised Clear

Mounting Method

Mount tab

Diffuser

Frosted