STOANE
LIGHTING

Iris

STD-000029-0121

Configured Product

CCT

3000K

Beam

Elliptical 16.5° x 33.8°

Finish

RAL 9010 Pure White

Snoot Type

None (standard)

Mounting Method


Mounting TBC

STOANE LIGHTING

Iris

STD-000029-0121




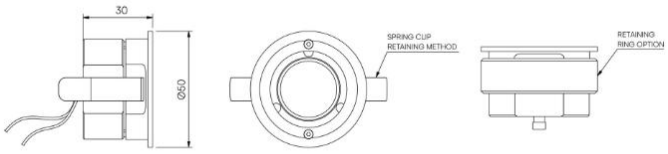

Compact adjustable recessed lighting fixture for Museum, Gallery and Retail displays.

Product Description
The Iris is an IP66 rated adjustable compact recessed and highly efficient fixture designed to provide precise illumination for Museum, Gallery and Retail applications. Iris is suitable where an airtight seal is required.

Key Features
• Sustainable construction: made from recycled aluminium with a long-lasting anodised finish. Specialist finishes available on request.
• Fixed optics can be easily swapped from Very Narrow to Flood to elliptical beam options
• Snoot and Cowl options available.
• Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.
• High-performance lighting: Up to 97 CRI LEDs

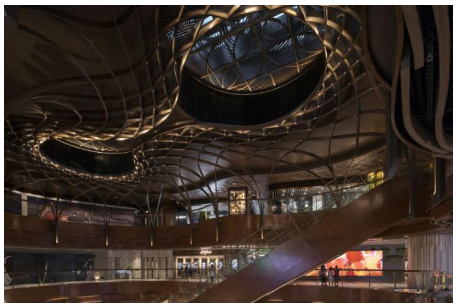

STOANE
LIGHTING

Iris

STD-000029-0121

Compliance

Technical

Supply	Remote constant current LED driver required
Light source	SL Star
Initial output	2W 2.9Vf at 700mA **80 CRI** 2200K • 150lm • 71lm/W **90 CRI** 2400K • 210lm • 105lm/W **95 CRI** 2700K • 167lm • 82lm/W 3000K • 177lm • 87lm/W 3500K • 187lm • 92lm/W 4000K • 197lm • 97lm/W
Light distribution	Very Narrow 8.9° Narrow 11.7° Medium 16.7° Flood 34.4° Wide Flood 66.4° Elliptical 16.5° x 33.8°
Lumen maintenance	L70 B50 >66,000 hours
Colour consistency	2 SDCM
Colour maintenance	± 0.017 Δu'v'

STOANE
LIGHTING

Iris

STD-000029-0121

IP rating	IP66
Available tilt	±22°
Cut out	Ø44mm
Weight	0.1kg

Service Commitment

ReNew

5 Year Warranty
25 Year Duty of Care