

# STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

## Tadpole

STD-000030-0090

### Configured Product

CCT \_\_\_\_\_

3000K

Beam \_\_\_\_\_

Flood 41.3°

Finish \_\_\_\_\_

Custom Painted

Attachments \_\_\_\_\_

TBC


Cable route \_\_\_\_\_

TBC

Cable Length \_\_\_\_\_

TBC



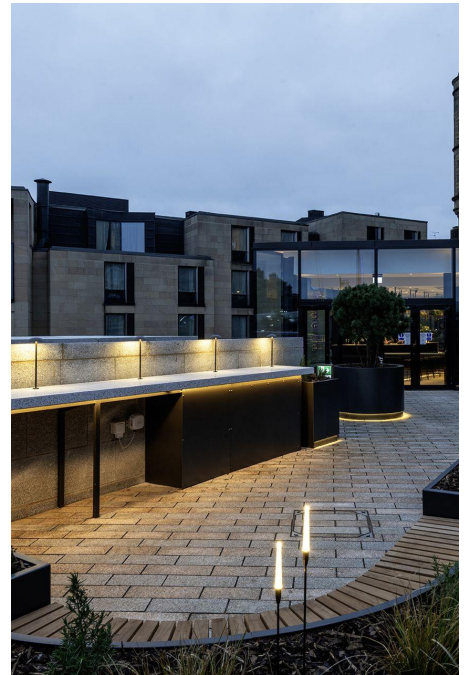

Compliance



## Technical

Supply Remote constant current LED driver required

Light source SL Star

Initial output 95CRI 2W 2.8Vf at 700mA

2700K · 179lm · 90lm/W

3000K · 192lm · 96lm/W

3500K · 204lm · 102lm/W

4000K · 219lm · 110lm/W

Light distribution Very Narrow 8.5°  
Narrow 12.4°  
Medium 21.3°  
Flood 41.3°  
Wide Flood 53.7°  
Elliptical 12.6° x 46.9°

Lumen maintenance L70 B50 >66,000 hours

Colour consistency 2 SDCM

Colour maintenance  $\pm 0.007 \Delta u'v'$

IP rating IP66

Weight 0.116kg

---

## Service Commitment

