

# Tadpole

STD-000030-0117

## Configured Product

CCT

2700K

Beam

Narrow 12.4°

Finish

TBC

Attachments


Straight/Slash reversible snoot (specified separately)

Cable route

Through Base

Cable Length

500mm

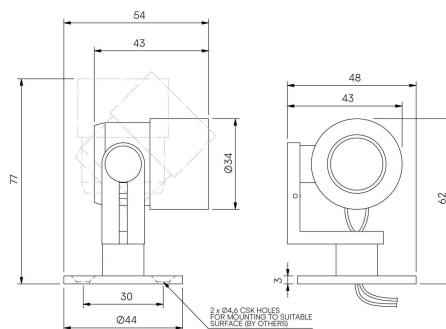

High-performance exterior spotlight system, for surface mounting to illuminate exterior architectural details and landscape illumination.

## Product Description

The Tadpole is an IP66 exterior rated, adjustable and lockable spotlight.

Constructed from precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics.

Provided with interchangeable optics from Very Narrow to Wide Flood to elliptical beams. Additional mounting options for spike and surface mount applications.

## Key Features



- Sustainable construction: made from recycled aluminium with a weather resistant long-lasting anodised and powder-coated finish. Specialist finishes available on request.
- Fixed optics can be easily swapped from Very Narrow to Flood to elliptical beam options
- Snoot and Cowl options available.
- Wall and Spike mounted options available.
- Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.
- High-performance lighting: up to 97 CRI LEDs with interchangeable optical systems.

**STOANE LIGHTING**

EQUIPMENT DESIGN + MANUFACTURE

Tadpole

STD-000030-0117

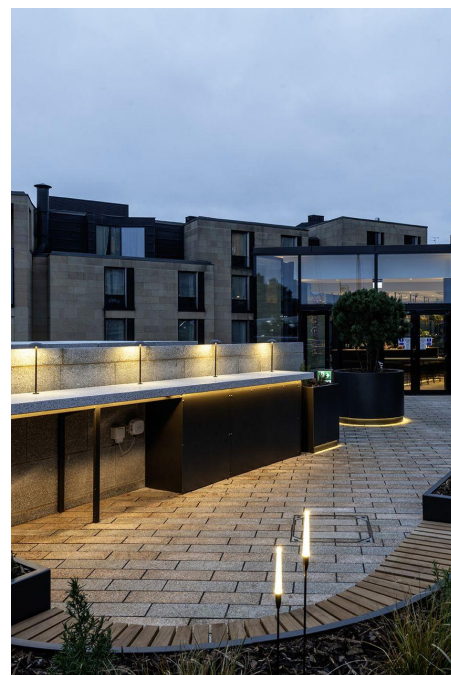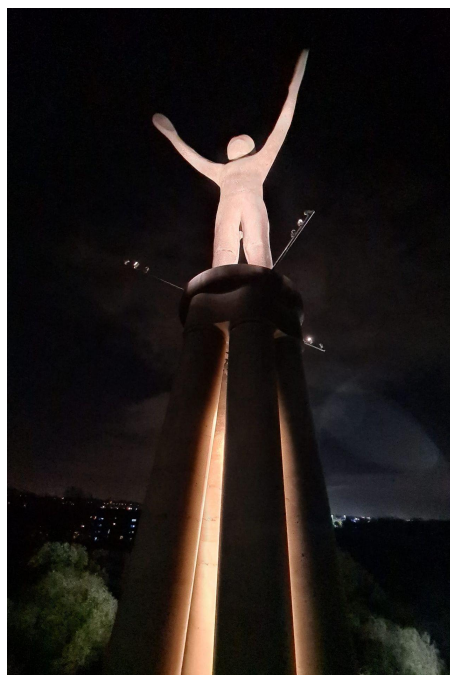

Compliance



Technical

|                    |                                                                                                                                       |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| Supply             | Remote constant current LED driver required                                                                                           |
| Light source       | SL Star                                                                                                                               |
| Initial output     | 95CRI 2W 2.8Vf at 700mA<br><br>2700K · 179lm · 90lm/W<br>3000K · 192lm · 96lm/W<br>3500K · 204lm · 102lm/W<br>4000K · 219lm · 110lm/W |
| Light distribution | Very Narrow 8.5°<br>Narrow 12.4°<br>Medium 21.3°<br>Flood 41.3°<br>Wide Flood 53.7°<br>Elliptical 12.6° x 46.9°                       |
| Lumen maintenance  | L70 B50 >66,000 hours                                                                                                                 |
| Colour consistency | 2 SDCM                                                                                                                                |
| Colour maintenance | ± 0.007 Δu'v'                                                                                                                         |
| IP rating          | IP66                                                                                                                                  |
| Weight             | 0.116kg                                                                                                                               |

Service Commitment

