STOANE
LIGHTING

Bulrush

STD-000035-0030

Configured Product

CCT

2700K

Length

500mm


Finish


Anodised Black

STOANE LIGHTING

Bulrush

STD-000035-0030

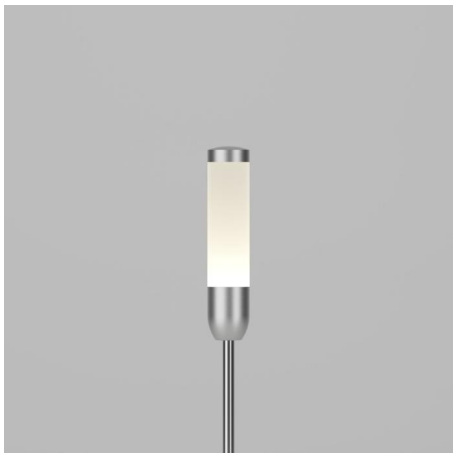

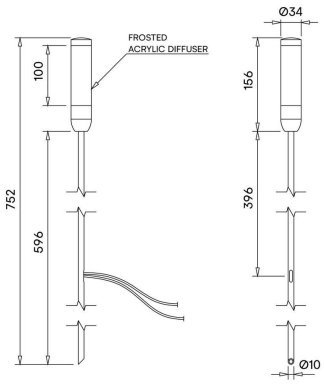

Exterior Landscape bollard, designed for soft and hard landscaping applications, for enhancing green spaces and pathways.

Product Description

The Bulrush is a slender form factor IP66 rated exterior bollard light, designed to provide a soft, low level 360° lighting distribution via a customised impact resistant frosted diffuser system. Used to enhance walkways and greenery without overwhelming the natural surroundings.

Available in static white colour temperatures from 1800K to 4000K as standard, special SPD LED's such as Reds or PC Amber are available on request.

Key Features

• Sustainable construction: made from recycled aluminium with a weather resistant long-lasting anodised and powder-coated finish. Specialist finishes available on request.
• Ability to specify individual stem lengths and bespoke mount plate options to create product clusters.
• Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.
• High-performance lighting: up to 97 CRI LEDs.
• Special SPD LED's available on request.
• Ground spike and fixed mount plate options available for soft and hard landscaping applications.



STOANE
LIGHTING

Bulrush

STD-000035-0030

Compliance

STOANE LIGHTING

Bulrush

STD-000035-0030

Technical

Supply	Remote constant current LED driver required
Light source	SL Star
Initial output	2W 2.9Vf at 700mA **80 CRI** 2200K • 150lm • 71lm/W **90 CRI** 2400K • 210lm • 105lm/W **95 CRI** 2700K • 167lm • 82lm/W 3000K • 177lm • 87lm/W 3500K • 187lm • 92lm/W 4000K • 197lm • 97lm/W
Light distribution	Full distribution 343.2°
Lumen maintenance	L70 B50 >66,000 hours
Colour consistency	2 SDCM
Colour maintenance	± 0.007 Δu'v'
IP rating	IP65
IK rating	IK10
Weight	0.43kg

STOANE
LIGHTING

Bulrush

STD-000035-0030

Service Commitment



