STOANE
LIGHTING

Fixed Tadpole

STD-000068-0106

Configured Product

CCT

2700K

Beam

Wide Flood 60.6°

Finish

Anodised Clear

Attachments

Straight/Slash reversible snoot (specified separately)

Secondary Lensing Accessories


Without accessories

STOANE LIGHTING

Fixed Tadpole

STD-000068-0106



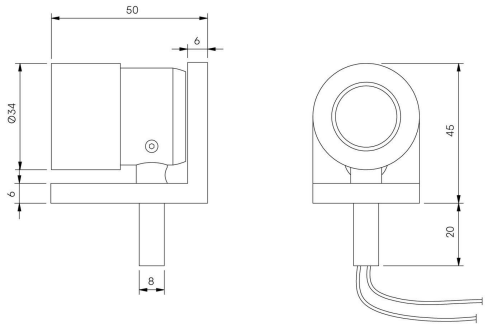


High-performance exterior spotlight system, for wall mounting to illuminate exterior architectural details and landscape illumination.


Product Description

The Fixed Tadpole is an IP66 exterior rated, fixed focus spotlight. Constructed from precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. Designed to have a crisp clean look whilst offering simple, site-friendly installation.
Additional mounting options for spike and surface mount applications.

Key Features

• Sustainable construction: made from recycled aluminium with a weather resistant long-lasting anodised and powder-coated finish. Specialist finishes available on request.
• Fixed optics can be easily swapped from Very Narrow to Flood to elliptical beam options
• Snoot and Cowl options available.
• Surface and Spike mounted options available.
• Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.
• High-performance lighting: up to 98 CRI LEDs with interchangeable optical systems.

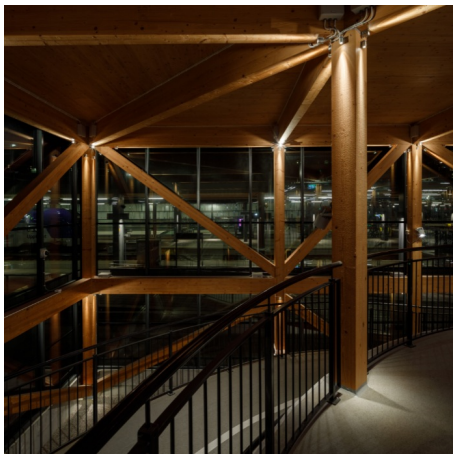

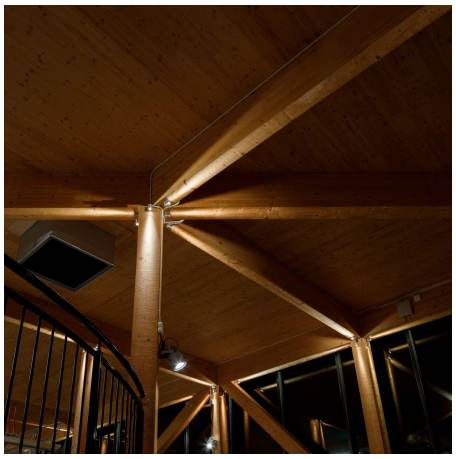



STOANE
LIGHTING

Fixed Tadpole

STD-000068-0106

Compliance

UK CA CE

c ETL US LISTED
Intertek

STOANE LIGHTING

Fixed Tadpole

STD-000068-0106

Technical

Supply	Remote constant current LED driver required
Light source	SL Star
Initial output	2W 2.9Vf at 700mA **80 CRI** 2200K • 150lm • 71lm/W **90 CRI** 2400K • 210lm • 105lm/W **95 CRI** 2700K • 167lm • 82lm/W 3000K • 177lm • 87lm/W 3500K • 187lm • 92lm/W 4000K • 197lm • 97lm/W
Light distribution	Very Narrow 8.9° Narrow 11.5° Medium 16.4° Flood 37.7° Wide Flood 60.6° Elliptical 16.1° x 47.3°
Lumen maintenance	L70 B50 >66,000 hours
Colour consistency	2 SDCM
Colour maintenance	± 0.007 Δu'v'
IP rating	IP66
Weight	0.14kg

STOANE
LIGHTING

Fixed Tadpole

STD-000068-0106

Service Commitment



