

## Iris Type S

STD-000071-0028

### Configured Product

CCT \_\_\_\_\_

3000K

Beam \_\_\_\_\_

Wide Flood 50.7°

Finish \_\_\_\_\_


Anodised Clear

Attachments \_\_\_\_\_

Straight Snoot

Mounting Method \_\_\_\_\_

Retaining Ring

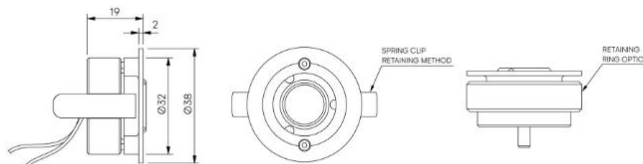

Miniature adjustable recessed lighting fixture for Museum, Gallery and Retail displays.

### Product Description

The Iris Type S is an IP65 rated adjustable compact recessed and highly efficient fixture designed to provide precise illumination for Museum, Gallery and Retail applications. Iris Type S is suitable where an airtight seal is required.

### Key Features

- Sustainable construction: made from recycled aluminium with a long-lasting anodised finish. Specialist finishes available on request.
- Fixed optics can be easily swapped for multiple beam options
- Snoot and Cowl options available.
- Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.
- High-performance lighting: up to 97 CRI LEDs

### Compliance



## Technical

Supply Remote constant current LED driver required

Light source SL Type S

Initial output 95 CRI 1.4W 2.75Vf at  
500mA  
  
2700K · 139lm · 99lm/W  
3000K · 148lm · 105lm/W  
3500K · 158lm · 112lm/W  
4000K · 169lm · 120lm/W

Light distribution Medium 22.9°  
Flood 35.2°  
Wide Flood 50.7°  
Elliptical 21.7° x 33.3°

Lumen maintenance L70 B50 >66,000 hours

Colour consistency 2 SDCM

Colour maintenance  $\pm 0.007 \Delta u'v'$

IP rating IP66

Weight 0.041kg

---

## Service Commitment

