

Iris Type S

STD-000071-0048

Configured Product

CCT

2700K

Beam

Flood 36.7°

Finish


Anodised Clear

Snoot Type

Slash Cut

Mounting Method

Spring Clip

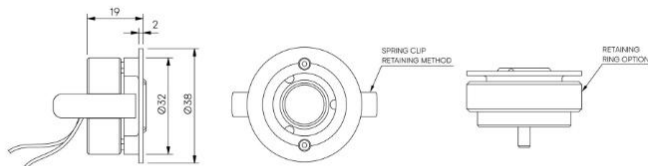

Miniature adjustable recessed lighting fixture for Museum, Gallery and Retail displays.

Product Description

The Iris Type S is an IP65 rated adjustable compact recessed and highly efficient fixture designed to provide precise illumination for Museum, Gallery and Retail applications. Iris Type S is suitable where an airtight seal is required.

Key Features

- Sustainable construction: made from recycled aluminium with a long-lasting anodised finish. Specialist finishes available on request.
- Fixed optics can be easily swapped for multiple beam options
- Snoot and Cowl options available.
- Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.
- High-performance lighting: up to 97 CRI LEDs

Compliance



Technical

Supply	Remote constant current LED driver required
Light source	SL Type S
Initial output	95 CRI 1.4W 2.8Vf at 500mA 2700K · 125lm · 82lm/W 3000K · 133lm · 94lm/W 3500K · 140lm · 99lm/W 4000K · 148lm · 104lm/W
Light distribution	Medium 18.5° Flood 36.7° Wide Flood 54.1° Elliptical 17.1° x 34.5°
Lumen maintenance	L70 B50 >66,000 hours
Colour consistency	2 SDCM
Colour maintenance	± 0.007 Δu'v'
IP rating	IP66
Weight	0.041kg

Service Commitment

