

# Bulwark

STD-000076-0008



## Configured Product

CCT

2700K

Finish

Matt Black

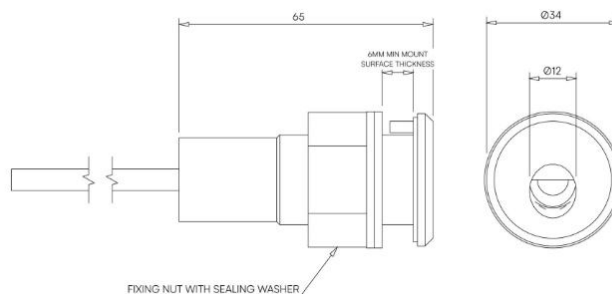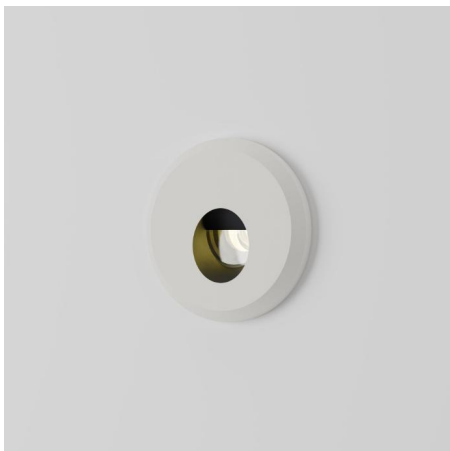

Exterior recessed wall light, for enhancing pathways, stairs and decks.

## Product Description

The Bulwark is a Marine Grade miniature IP66 rated exterior recessed wall light, designed to provide a low level soft directional light to pathways, stairs and ship decks.

Including glare baffle to avoid upward light spill.

Supplied with install sleeve and snap-on stainless steel bezel. Including an acetal mounting sleeve.

## Key Features

- Sustainable construction: made from Stainless Steel, recycled aluminium with a weather resistant long-lasting anodised and powder-coated finish. Specialist finishes available on request.
- Fixed focus optic with soft asymmetric light distribution and glare baffle.
- Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.
- High-performance lighting: up to 97 CRI LEDs.
- First fix acetal installation sleeve

## Compliance



# Technical

|                    |                                                                                                                                         |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------|
| Supply             | Remote constant current LED driver required                                                                                             |
| Light source       | SL Type S                                                                                                                               |
| Initial output     | 95 CRI 1.4W 2.8Vf at 500mA<br><br>2700K · 125lm · 88lm/W<br>3000K · 133lm · 94lm/W<br>3500K · 140lm · 99lm/W<br>4000K · 148lm · 104lm/W |
| Light distribution | Asymmetrical 35.6° x 33.1°                                                                                                              |
| Lumen maintenance  | L70 B50 >66,000 hours                                                                                                                   |
| Colour consistency | 2 SDCM                                                                                                                                  |
| Colour maintenance | ± 0.007 Δu'v'                                                                                                                           |
| IP rating          | IP66                                                                                                                                    |
| IK rating          | IK10                                                                                                                                    |
| Weight             | 0.147kg                                                                                                                                 |

# Service Commitment

