

# Wall Scoop

STD-000277-0021

## Configured Product

CCT 

---

Custom

Finish 


---

Custom Painted

Bezel Detail 

---

Chamfered

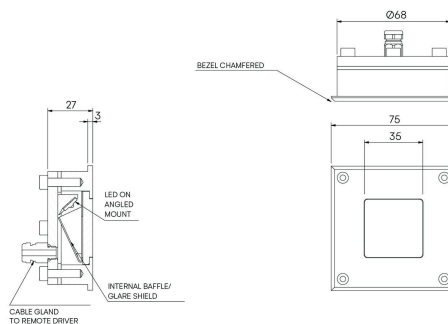

Exterior recessed fixed focus wall light, for enhancing architectural details, gardens and pathways.




## Product Description

The Wall Scoop is an IP66 and robust IK10 rated fixed recessed wall light, for use at low level and designed to highlight pathways and stairs. Perfect for both commercial and residential applications, ideal for bringing landscapes to life after dark.

Machined from 316 Grade Stainless Steel and a toughened glass lens.

## Key Features

- Robust construction: made from 316 Grade Stainless Steel. Specialist finishes such as C5M coatings available on request suitable for marine environments.
- Includes a custom kick reflector and glare baffle for beam control.
- Advanced dimming options: DALI, 0-10V, and Wireless dimming, down to 0.1%.
- High-performance lighting: up to 97 CRI LEDs.

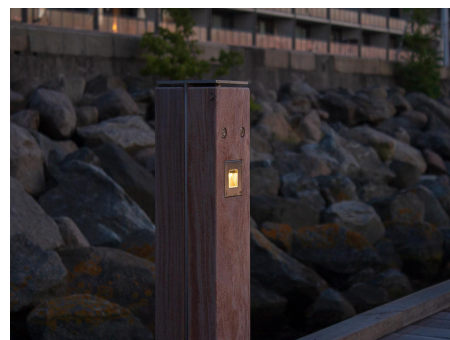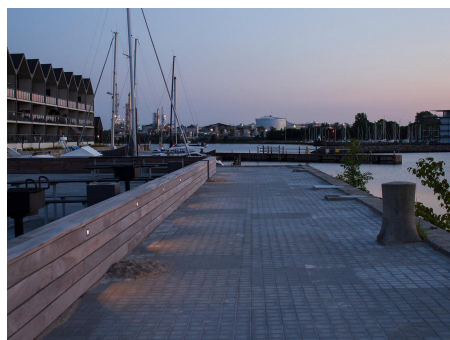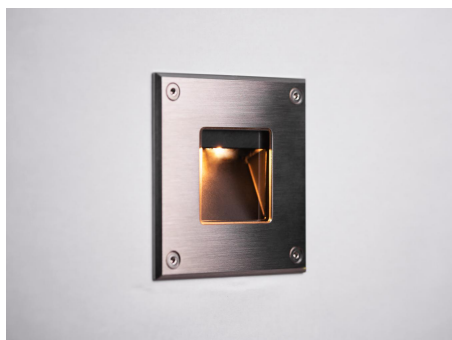

Compliance



Technical

|                    |                                                                                                                                        |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Supply             | Remote constant current LED driver required                                                                                            |
| Light source       | Extended Type S                                                                                                                        |
| Initial output     | 95CRI 3.1W 2.9Vf at 1050mA<br><br>2700K · 251lm · 81lm/W<br>3000K · 268lm · 86lm/W<br>3500K · 285lm · 92lm/W<br>4000K · 304lm · 97lm/W |
| Light distribution | Flood 58.2 x 72.2°                                                                                                                     |
| Lumen maintenance  | L70 B50 >66,000 hours                                                                                                                  |
| Colour consistency | 2 SDCM                                                                                                                                 |
| Colour maintenance | ± 0.007 Δu'v'                                                                                                                          |
| IP rating          | IP66                                                                                                                                   |
| IK rating          | IK10                                                                                                                                   |
| Weight             | 0.6kg                                                                                                                                  |

---

Service Commitment

