

# Surf Type G

STD-000296-0188

## Configured Product

CCT

2700K

Beam

Flood 28.7°

Finish

Custom Painted

Attachments


None

Cable route

Through Base

Secondary Lensing Accessories

Without accessories

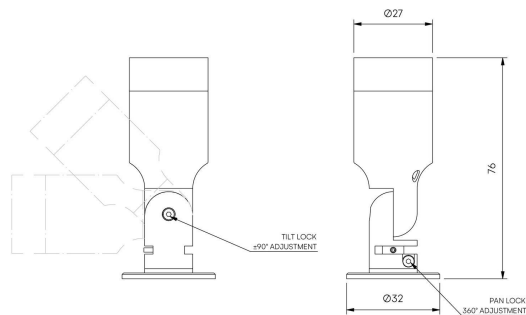


Compact lighting system for Museum, Gallery and Retail displays.

## Product Description

The Surf Type G is a compact adjustable and highly efficient miniature fixture designed to provide precise illumination for Museum, Gallery and Retail applications. With both pan and tilt locking mechanisms. Constructed from precision-machined recycled aluminium, the system features an anodised finish for enhanced durability and aesthetics.

## Key Features

- Sustainable construction: made from recycled aluminium with a long-lasting anodised finish. Specialist finishes available on request.
- Tree system height and number of plug in points can be specified.
- Fixed interchangeable optics available ranging from Very narrow to Wide Flood to elliptical beam options.
- Lockable Tilt and Pan mechanisms.
- Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.
- High-performance lighting: Up to 97 CRI LEDs

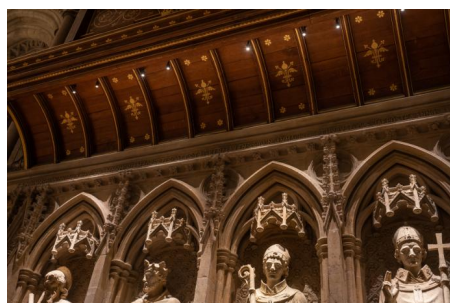

Compliance



Technical

|                    |                                                                                                                                        |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Supply             | Remote constant current LED driver required                                                                                            |
| Light source       | SL Star                                                                                                                                |
| Initial output     | 95CRI 3.1W 2.9Vf at 1050mA<br><br>2700K · 251lm · 81lm/W<br>3000K · 268lm · 86lm/W<br>3500K · 285lm · 92lm/W<br>4000K · 304lm · 97lm/W |
| Light distribution | Very Narrow 9°<br>Narrow 12.6°<br>Medium 20.6°<br>Flood 36.3°<br>Wide Flood 47.1°<br>Elliptical 9.7° x 46.1°                           |
| Lumen maintenance  | L70 B50 >66,000 hours                                                                                                                  |
| Colour consistency | 2 SDCM                                                                                                                                 |
| Colour maintenance | ± 0.007 Δu'v'                                                                                                                          |
| IP rating          | IP20                                                                                                                                   |
| Weight             | 0.07kg                                                                                                                                 |

---

Service Commitment

