

Amanita

STD-000409-0053

Configured Product

CCT

3000K

Finish

Matt Black

Mounting Method


Spike

Cable Length

500mm

Stem Height

1000mm

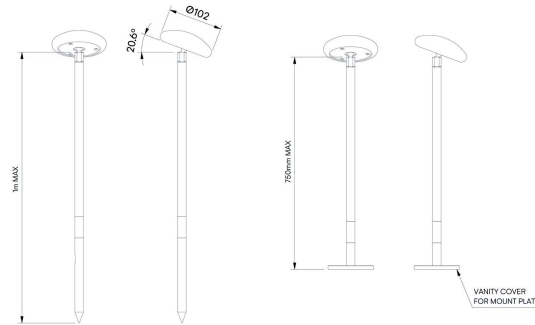

Exterior landscape accent lighting system, designed for both soft and hard landscaping applications, it can be used both in ground and on tabletops.

### Product Description

The Amanita is a small form factor IP66 rated exterior accent light, designed to provide a soft, low level, 360° lighting distribution via a customised impact resistant frosted diffuser.

When orientated directly downwards the product provides a **BUG rating** of B0 U0 G0.

Providing up to 20.6° of lockable tilt adjustment and both spike and fixed mount plates available.

### Key Features

- Sustainable construction: made from recycled aluminium with a weather resistant long-lasting anodised and powder-coated finish. Specialist finishes available on request.
- Versatile adjustment providing up to 20.6° of tilt with locking mechanism.
- Advanced dimming options: DALI, 0-10V, and Wireless dimming, down to 0.1%.
- High-performance lighting: Up to 97 CRI LEDs.
- Special SPD LEDs available on request.
- Ground spike and fixed mount plate options available for soft and hard landscaping applications.

## Compliance



Technical

|                    |                                                                                                                                        |
|--------------------|----------------------------------------------------------------------------------------------------------------------------------------|
| Supply             | Remote constant current LED driver required                                                                                            |
| Light source       | SL Star                                                                                                                                |
| Initial output     | 95 CRI 6W 8.4Vf at 700mA<br><br>2700K · 537lm · 90lm/W<br>3000K · 576lm · 96lm/W<br>3500K · 612lm · 102lm/W<br>4000K · 657lm · 110lm/W |
| Light distribution | Downward 96.2°                                                                                                                         |
| Lumen maintenance  | L70 B50 >66,000 hours                                                                                                                  |
| Colour consistency | 2 SDCM                                                                                                                                 |
| Colour maintenance | ± 0.007 Δu'v'                                                                                                                          |
| IP rating          | IP66                                                                                                                                   |
| Weight             | 0.65kg                                                                                                                                 |

Service Commitment

