STOANE
LIGHTING

ZTA.70.Surface.Zoom.N

STD-000527-0011

Configured Product

Light Source

SL98

Light Source Size

6mm LES

CCT

4000K

Finish

RAL 9010 Pure White

Attachments

Straight/Slash Cut Snoot (specified separately)

Cable route

Through Base

Secondary Lensing Accessories


With accessories

STOANE LIGHTING

ZTA.70.Surface.Zoom.N

STD-000527-0011



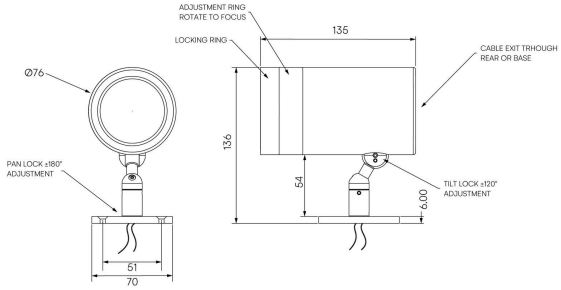

Modular high-performance, surface mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Product Description

ZTA.70.Surface.Zoom.N is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics.
The spotlight can accommodate up to two lens accessories and multiple attachments, making it highly customisable for various lighting needs.
This version features a **variable zoom optic range of 17.2° to 58.5° maintaining excellent beam quality throughout**.
With a high output of up to 1419lm and CRI up to 98, it delivers exceptional performance for focused, adjustable illumination.

Key Features

• Sustainable construction: made from recycled aluminium with durable anodised and powder-coated finishes. Specialist finishes available on request.
• Variable zoom: adjustable beam from 17.2° to 58.5°, with smooth optical transition and minimal artefacting.
• High-output performance: delivered lumens up to 1419lm and CRI up to 98.
• Versatile adjustment: 363° pan and 130° tilt with lockable spot.
• Advanced dimming: local dim, DALI, 0–10V, and Wireless dimming options, down to 0.1%.
• Customisable Accessories: Can house up to two lens accessories and various attachments.
• Ceiling mounting only: designed exclusively for ceiling-mounted track installations.



STOANE
LIGHTING

ZTA.70.Surface.Zoom.N

STD-000527-0011

Compliance

STOANE LIGHTING

ZTA.70.Surface.Zoom.N

STD-000527-0011

Technical

Supply	Remote constant current LED driver required
Light source	6mm LES COB
Initial output	**SL90** 13.6W 34Vf at 400mA 2700K • 1641lm • 121lm/W 3000K • 1710lm • 126lm/W 3500K • 1727lm • 127lm/W 4000K • 1773lm • 130lm/W **SL98** 14.5W 36.4Vf at 400mA 2400K • 1115lm • 77lm/W 2700K • 1313lm • 90lm/W 3000K • 1403lm • 97lm/W 3500K • 1403lm • 97lm/W 4000K • 1481lm • 102lm/W
Light distribution	Narrow zoom extent 17.2° Wide Flood zoom extent 58.5°
Lumen maintenance	L90 B0 in excess of 94,000 hours
Colour consistency	2 SDCM
IP rating	IP20
Weight	0.84kg

STOANE
LIGHTING

ZTA.70.Surface.Zoom.N

STD-000527-0011

Service Commitment



