STOANE
LIGHTING

BPX

STD-000533-0088

Configured Product

Light Source

SL98

Light Source Size

9mm LES

CCT

2700K

Beam

Medium 2 27.4°

Finish

TBC

Dimming

Driver specific

Diffuser

N/A

Secondary Lensing Accessories


Without accessories

STOANE LIGHTING

BPX

STD-000533-0088



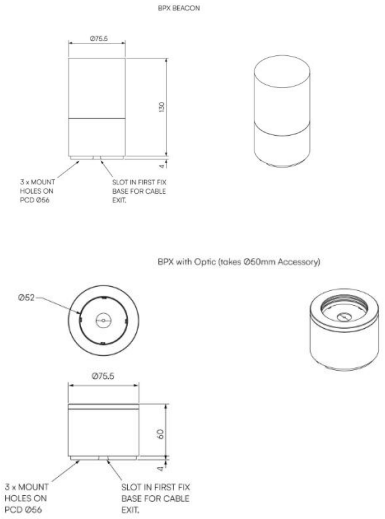

Modular, high-performance spotlight system, for ceiling, wall and tabletop lighting applications.

Product Description
The BPX is a compact, minimal and modular lighting system that can be easily adapted. BPX is often the building block from which custom fittings are built.
Engineered to accommodate both fixed interchangeable optics with additional lensing accessories, or decorative frosted diffuser options.
Constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics.

Key Features
• Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
• Fixed optics can be easily swapped to decorative frosted diffuser options.
• Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.
• High-performance lighting: up to 98 CRI LEDs with interchangeable optical systems.
• Capable of ceiling, wall and table mounting.

Compliance

Technical

STOANE LIGHTING

BPX

STD-000533-0088

Supply	Remote constant current LED driver required	
Light source	6mm LES COB	9mm LES COB
Initial output	**SL90** 8W 32Vf at 250mA 2700K · 1087lm · 136lm/W 3000K · 1133lm · 141lm/W 3500K · 1144lm · 143lm/W 4000K · 1175lm · 147lm/W **SL98** 8.6W 34.4Vf at 250mA 2400K · 733lm · 85lm/W 2700K · 863lm · 100lm/W 3000K · 923lm · 107lm/W 3500K · 923lm · 107lm/W 4000K · 974lm · 113lm/W	**SL90** 11.8W 33.8Vf at 350mA 2700K · 1822lm · 154lm/W 3000K · 1908lm · 161lm/W 3500K · 1929lm · 163lm/W 4000K · 1919lm · 162lm/W **SL98** 10.6W 30.4Vf at 350mA 2400K · 1085lm · 102lm/W 2700K · 1205lm · 113lm/W 3000K · 1288lm · 121lm/W 3500K · 1313lm · 124lm/W 4000K · 1352lm · 127lm/W
Light distribution	Narrow 12.5° Narrow 2 13.8° Medium 25.4° Flood 36.5° Wide Flood 56° Plain reflector 104.3° Accessory reflector 105°	Narrow 16.1° Medium 20.2° Medium 2 27.4° Flood 35.1° Wide Flood 57.2° Plain reflector 103.2° Accessory reflector 103.7° Frosted Beacon Opalised Beacon
Lumen maintenance	L90 B0 in excess of 94,000 hours	
Colour consistency	2 SDCM	
IP rating	IP20	
Weight	0.8kg	

STOANE
LIGHTING

BPX

STD-000533-0088

Service Commitment



