STOANE
LIGHTING

# ZTA.35.LV Track

STD-000555-0050

## Configured Product

Light Source

SL90

Light Source Size

6mm LES

CCT

TBC

Beam

Medium 23°

Finish

RAL 9010 Pure White

Track adaptor colour

White

Dimming

TBC

Secondary Lensing Accessories

Without accessories

STOANE
LIGHTING

# ZTA.35.LV Track

STD-000555-0050

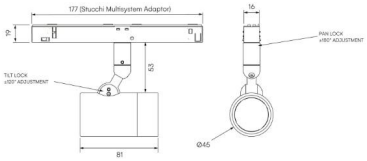


Modular high-performance, low voltage track-mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Easily interchangeable between Zoom and Fixed Optics

**Product Description**
ZTA.35.LV Track is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics.
Compatible with 48V Stucchi Multisystem EVO track , this spotlight includes integral dimming control gear.
The spotlight can accommodate up to two lens accessories with fixed optics or a single lens accessory with Zoom and multiple attachments, making it highly customisable for various lighting needs.

**Key Features**
• Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
• Fixed optics can be easily swapped to Zoom.
• Versatile adjustment: 363° pan rotation and 130° tilt with a lockable spot.
• Advanced dimming options: DALI, 0-10V, and Wireless dimming, down to 0.1%.
• High-performance lighting: up to 98 CRI LEDs with interchangeable optical systems.
• Customisable accessories: can house up to two lens accessories and various attachments.
• Ceiling mounting only: designed exclusively for ceiling installations.

## Compliance

UK CA CE

STOANE LIGHTING

# ZTA.35.LV Track

STD-000555-0050

## Technical

| | | |
|---|---|---|
| **Supply** | 48V DC supply to Stucchi Multisystem EVO track | |
| **Light source** | 4mm LES COB | 6mm LES COB |
| **Initial output** | **SL90** 8.8W 35.1Vf at 250mA | **SL90** 8W 32Vf at 250mA |
| | 2700K · 972lm · 111lm/W<br>3000K · 1013lm · 115lm/W<br>3500K · 1023lm · 116lm/W<br>4000K · 1051lm · 120lm/W | 2700K · 1087lm · 136lm/W<br>3000K · 1133lm · 141lm/W<br>3500K · 1144lm · 143lm/W<br>4000K · 1175lm · 147lm/W |
| | **SL98** 4.3W 17.2Vf at 250mA | **SL98** 8.6W 34.4Vf at 250mA |
| | 2400K · 355lm · 83lm/W<br>2700K · 418lm · 97lm/W<br>3000K · 446lm · 104lm/W<br>3500K · 446lm · 104lm/W<br>4000K · 471lm · 110lm/W | 2400K · 733lm · 85lm/W<br>2700K · 863lm · 100lm/W<br>3000K · 923lm · 107lm/W<br>3500K · 923lm · 107lm/W<br>4000K · 974lm · 113lm/W |
| **Light distribution** | Narrow 13.6°<br>Medium 22°<br>Flood 35.4°<br>Wide Flood 52.8°<br>Zoom 17.2° - 46.8° | Narrow 17.8°<br>Medium 23°<br>Flood 34.6°<br>Wide Flood 54.5°<br>Zoom 21.6° - 44.9° |
| **Lumen maintenance** | L90 B0 in excess of 94,000 hours | |
| **Colour consistency** | 2 SDCM | |
| **IP rating** | IP20 | |
| **Weight** | 0.31kg | |

STOANE
LIGHTING

# ZTA.35.LV Track

STD-000555-0050

## Service Commitment