

## ZTA.35.Mains Track

STD-000556-0043

### Configured Product

Light Source \_\_\_\_\_

SL90

Light Source Size \_\_\_\_\_

6mm LES

CCT \_\_\_\_\_

2700K

Beam \_\_\_\_\_

Medium 23°

Finish \_\_\_\_\_


Standard Painted

Track adaptor colour \_\_\_\_\_

White

Dimming \_\_\_\_\_

DALI

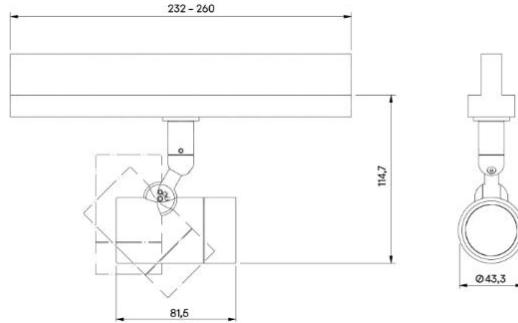

Modular high-performance, mains track-Mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Easily interchangeable between fixed and Zoom optics.

#### **Product Description**

ZTA.35.Mains Track is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. Compatible with 3-circuit adapters for 120-277V Stucchi, Eutrac, Global Pulse, and other track systems, this spotlight includes integral dimming control gear. The spotlight can accommodate up to two lens accessories with fixed optics or a single lens accessory with Zoom and multiple attachments, making it highly customisable for various lighting needs.

#### **Key Features**

- Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
- Fixed optics can be easily swapped to Zoom.
- Versatile adjustment: 360° pan rotation and 130° tilt with a lockable spot.
- Broad compatibility: 3-circuit adapter supports multiple track systems (Stucchi, Eutrac, Global Pulse).
- Advanced dimming options: on-board, DALI, 0-10V, and Wireless dimming, down to 0.1%.
- High-Performance Lighting: Up to 98 CRI LEDs with interchangeable optical systems.
- Customisable accessories: can house up to two lens accessories and various attachments.
- Ceiling mounting only: designed exclusively for ceiling installations.

**STOANE LIGHTING**

EQUIPMENT DESIGN + MANUFACTURE

ZTA.35.Mains Track

STD-000556-0043

Compliance



# Technical

Supply	230V/240V via 3 circuit track	
Light source	4mm LES COB	6mm LES COB
Initial output	<b>SL90</b> 8.8W 35.1Vf at 250mA 2700K · 972lm · 111lm/W 3000K · 1013lm · 115lm/W 3500K · 1023lm · 116lm/W 4000K · 1051lm · 120lm/W	<b>SL90</b> 8W 32Vf at 250mA 2700K · 1087lm · 136lm/W 3000K · 1133lm · 141lm/W 3500K · 1144lm · 143lm/W 4000K · 1175lm · 147lm/W
	<b>SL98</b> 4.3W 17.2Vf at 250mA 2700K · 418lm · 97lm/W 3000K · 446lm · 104lm/W 3500K · 446lm · 104lm/W 4000K · 471lm · 110lm/W	<b>SL98</b> 8.6W 34.4Vf at 250mA 2700K · 863lm · 100lm/W 3000K · 923lm · 107lm/W 3500K · 923lm · 107lm/W 4000K · 974lm · 113lm/W
Light distribution	Narrow 13.6° Medium 22° Flood 35.4° Wide Flood 52.8° Zoom 17.2° - 46.8°	Narrow 17.8° Medium 23° Flood 34.6° Wide Flood 54.5° Zoom 21.6° - 44.9°
Lumen maintenance	L90 B0 in excess of 94,000 hours	
Colour consistency	2 SDCM	
Colour maintenance	± 0.007 Δu'v'	
IP rating	IP20	
Weight	0.44kg	

**STOANE LIGHTING**

EQUIPMENT DESIGN + MANUFACTURE

ZTA.35.Mains Track

STD-000556-0043

---

## Service Commitment



---