

ZTA.35.Mains Track

STD-000556-0072

Configured Product

Light Source

SL98

Light Source Size

4mm LES

CCT

3000K

Beam

Medium 22°

Finish

Matt Black

Track adaptor colour


Black

Dimming

DALI

Secondary Lensing Accessories

With accessories

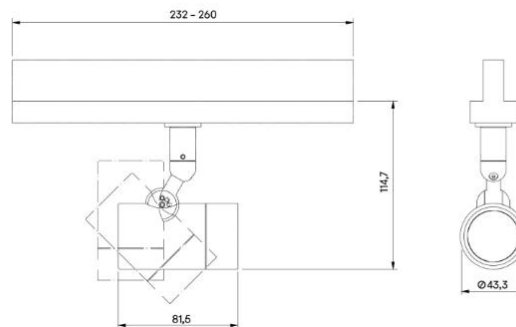

Modular high-performance, mains track-Mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Easily interchangeable between fixed and Zoom optics.

### Product Description

ZTA.35.Mains Track is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics.

Compatible with 3-circuit adapters for 120-277V Stucchi, Eutrac, Global Pulse, and other track systems, this spotlight includes integral dimming control gear.

The spotlight can accommodate up to two lens accessories with fixed optics or a single lens accessory with Zoom and multiple attachments, making it highly customisable for various lighting needs.

### Key Features

- Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
- Fixed optics can be easily swapped to Zoom.
- Versatile adjustment: 363° pan rotation and 130° tilt with a lockable spot.
- Broad compatibility: 3-circuit adapter supports multiple track systems (Stucchi, Eutrac, Global Pulse).
- Advanced dimming options: on-board, DALI, 0-10V, and Wireless dimming, down to 0.1%.
- High-Performance Lighting: Up to 98 CRI LEDs with interchangeable optical systems.
- Customisable accessories: can house up to two lens accessories and various attachments.
- Ceiling mounting only: designed exclusively for ceiling installations.

Compliance



Technical

|                    |                                  |                           |
|--------------------|----------------------------------|---------------------------|
| Supply             | 230V/240V via 3 circuit track    |                           |
| Light source       | 4mm LES COB                      | 6mm LES COB               |
| Initial output     | SL90 8.8W 35.1Vf at 250mA        | SL90 8W 32Vf at 250mA     |
|                    | 2700K · 972lm · 111lm/W          | 2700K · 1087lm · 136lm/W  |
|                    | 3000K · 1013lm · 115lm/W         | 3000K · 1133lm · 141lm/W  |
|                    | 3500K · 1023lm · 116lm/W         | 3500K · 1144lm · 143lm/W  |
|                    | 4000K · 1051lm · 120lm/W         | 4000K · 1175lm · 147lm/W  |
|                    | SL98 4.3W 17.2Vf at 250mA        | SL98 8.6W 34.4Vf at 250mA |
|                    | 2400K · 355lm · 83lm/W           | 2400K · 733lm · 85lm/W    |
|                    | 2700K · 418lm · 97lm/W           | 2700K · 863lm · 100lm/W   |
|                    | 3000K · 446lm · 104lm/W          | 3000K · 923lm · 107lm/W   |
|                    | 3500K · 446lm · 104lm/W          | 3500K · 923lm · 107lm/W   |
|                    | 4000K · 471lm · 110lm/W          | 4000K · 974lm · 113lm/W   |
| Light distribution | Narrow 13.6°                     | Narrow 17.8°              |
|                    | Medium 22°                       | Medium 23°                |
|                    | Flood 35.4°                      | Flood 34.6°               |
|                    | Wide Flood 52.8°                 | Wide Flood 54.5°          |
|                    | Zoom 17.2° - 46.8°               | Zoom 21.6° - 44.9°        |
| Lumen maintenance  | L90 B0 in excess of 94,000 hours |                           |
| Colour consistency | 2 SDCM                           |                           |
| IP rating          | IP20                             |                           |
| Weight             | 0.44kg                           |                           |

---

Service Commitment

