STOANE
LIGHTING

ZTA.35.Mains Track

STD-000556-0073

Configured Product

Light Source

SL90

Light Source Size

6mm LES

CCT

3000K

Beam

Narrow 17.8°

Finish

RAL 9010 Pure White

Track adaptor colour

White

Dimming

0-10V

Secondary Lensing Accessories


With accessories

STOANE
LIGHTING

ZTA.35.Mains Track

STD-000556-0073



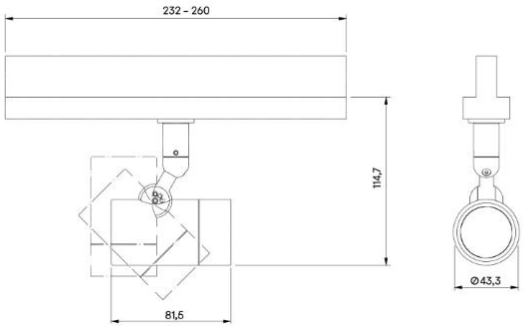

Modular high-performance, mains track-Mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Easily interchangeable between fixed and Zoom optics.

Product Description
ZTA.35.Mains Track is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics.
Compatible with 3-circuit adapters for 120-277V Stucchi, Eutrac, Global Pulse, and other track systems, this spotlight includes integral dimming control gear.
The spotlight can accommodate up to two lens accessories with fixed optics or a single lens accessory with Zoom and multiple attachments, making it highly customisable for various lighting needs.

Key Features
• Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
• Fixed optics can be easily swapped to Zoom.
• Versatile adjustment: 363° pan rotation and 130° tilt with a lockable spot.
• Broad compatibility: 3-circuit adapter supports multiple track systems (Stucchi, Eutrac, Global Pulse).
• Advanced dimming options: on-board, DALI, 0-10V, and Wireless dimming, down to 0.1%.
• High-Performance Lighting: Up to 98 CRI LEDs with interchangeable optical systems.
• Customisable accessories: can house up to two lens accessories and various attachments.
• Ceiling mounting only: designed exclusively for ceiling installations.

STOANE
LIGHTING

ZTA.35.Mains Track

STD-000556-0073

Compliance

UK CA CE

STOANE LIGHTING

ZTA.35.Mains Track

STD-000556-0073

Technical

Supply	230V/240V via 3 circuit track	
Light source	4mm LES COB	6mm LES COB
Initial output	**SL90** 8.8W 35.1Vf at 250mA	**SL90** 8W 32Vf at 250mA
	2700K · 972lm · 111lm/W	2700K · 1087lm · 136lm/W
	3000K · 1013lm · 115lm/W	3000K · 1133lm · 141lm/W
	3500K · 1023lm · 116lm/W	3500K · 1144lm · 143lm/W
	4000K · 1051lm · 120lm/W	4000K · 1175lm · 147lm/W
	SL98 4.3W 17.2Vf at 250mA	**SL98** 8.6W 34.4Vf at 250mA
	2400K · 355lm · 83lm/W	2400K · 733lm · 85lm/W
	2700K · 418lm · 97lm/W	2700K · 863lm · 100lm/W
	3000K · 446lm · 104lm/W	3000K · 923lm · 107lm/W
	3500K · 446lm · 104lm/W	3500K · 923lm · 107lm/W
	4000K · 471lm · 110lm/W	4000K · 974lm · 113lm/W
Light distribution	Narrow 13.6°	Narrow 17.8°
	Medium 22°	Medium 23°
	Flood 35.4°	Flood 34.6°
	Wide Flood 52.8°	Wide Flood 54.5°
	Zoom 17.2° - 46.8°	Zoom 21.6° - 44.9°
Lumen maintenance	L90 B0 in excess of 94,000 hours	
Colour consistency	2 SDCM	
IP rating	IP20	
Weight	0.44kg	

STOANE
LIGHTING

ZTA.35.Mains Track

STD-000556-0073

Service Commitment



