STOANE
LIGHTING

ZTA.35.Mains Track

STD-000556-0075

Configured Product

Light Source

SL98

Light Source Size

6mm LES

CCT

TBC

Beam

TBC

Finish

Matt Black

Track adaptor colour

Black

Dimming

DALI

Secondary Lensing Accessories


Without accessories

STOANE
LIGHTING

ZTA.35.Mains Track

STD-000556-0075



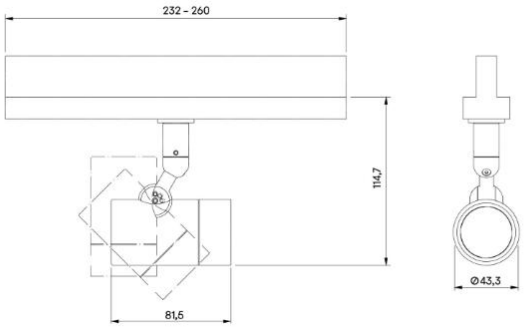

Modular high-performance, mains track-Mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Easily interchangeable between fixed and Zoom optics.

Product Description
ZTA.35.Mains Track is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics.
Compatible with 3-circuit adapters for 120-277V Stucchi, Eutrac, Global Pulse, and other track systems, this spotlight includes integral dimming control gear.
The spotlight can accommodate up to two lens accessories with fixed optics or a single lens accessory with Zoom and multiple attachments, making it highly customisable for various lighting needs.

Key Features
• Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
• Fixed optics can be easily swapped to Zoom.
• Versatile adjustment: 363° pan rotation and 130° tilt with a lockable spot.
• Broad compatibility: 3-circuit adapter supports multiple track systems (Stucchi, Eutrac, Global Pulse).
• Advanced dimming options: on-board, DALI, 0-10V, and Wireless dimming, down to 0.1%.
• High-Performance Lighting: Up to 98 CRI LEDs with interchangeable optical systems.
• Customisable accessories: can house up to two lens accessories and various attachments.
• Ceiling mounting only: designed exclusively for ceiling installations.

STOANE
LIGHTING

ZTA.35.Mains Track

STD-000556-0075

Compliance

UK CA CE

STOANE LIGHTING

ZTA.35.Mains Track

STD-000556-0075

Technical

Supply	230V/240V via 3 circuit track	
Light source	4mm LES COB	6mm LES COB
Initial output	**SL90** 8.8W 35.1Vf at 250mA	**SL90** 8W 32Vf at 250mA
	2700K · 972lm · 111lm/W	2700K · 1087lm · 136lm/W
	3000K · 1013lm · 115lm/W	3000K · 1133lm · 141lm/W
	3500K · 1023lm · 116lm/W	3500K · 1144lm · 143lm/W
	4000K · 1051lm · 120lm/W	4000K · 1175lm · 147lm/W
	SL98 4.3W 17.2Vf at 250mA	**SL98** 8.6W 34.4Vf at 250mA
	2400K · 355lm · 83lm/W	2400K · 733lm · 85lm/W
	2700K · 418lm · 97lm/W	2700K · 863lm · 100lm/W
	3000K · 446lm · 104lm/W	3000K · 923lm · 107lm/W
	3500K · 446lm · 104lm/W	3500K · 923lm · 107lm/W
	4000K · 471lm · 110lm/W	4000K · 974lm · 113lm/W
Light distribution	Narrow 13.6°	Narrow 17.8°
	Medium 22°	Medium 23°
	Flood 35.4°	Flood 34.6°
	Wide Flood 52.8°	Wide Flood 54.5°
	Zoom 17.2° - 46.8°	Zoom 21.6° - 44.9°
Lumen maintenance	L90 B0 in excess of 94,000 hours	
Colour consistency	2 SDCM	
IP rating	IP20	
Weight	0.44kg	

STOANE
LIGHTING

ZTA.35.Mains Track

STD-000556-0075

Service Commitment



