STOANE
LIGHTING

ZTA.50.LV Track.Wall Wash

STD-000561-0004

Configured Product

Light Source

SL98

Light Source Size

9mm LES

CCT

4000K

Finish

Matt Black

Track adaptor colour

Black

Dimming

DALI

Attachments

None

Secondary Lensing Accessories


Without accessories

STOANE LIGHTING

ZTA.50.LV Track.Wall Wash

STD-000561-0004



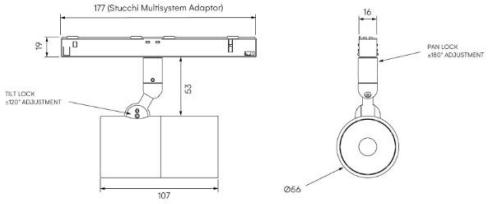

Modular high-performance, low voltage track-mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments.
Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Product Description
ZTA.50.LV Track.Wall Wash is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. Easily interchangeable between Zoom, Fixed optic and Framing projector options.

Key Features
• Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
• Fixed optics can be easily swapped to Zoom, Wall Wash and additional framer attachments.
• Versatile adjustment: 363° pan rotation and 130° tilt with a lockable spot.
• Advanced dimming options: DALI, 0-10V, and Wireless dimming, down to 0.1%.
• High-performance lighting: up to 98 CRI LEDs with interchangeable optical systems.
• Customisable accessories: can house up to two lens accessories and various attachments.
• Ceiling mounting only: designed exclusively for ceiling installations.

Compliance

UKCA CE

ETL LISTED c US Intertek

STOANE LIGHTING

ZTA.50.LV Track.Wall Wash

STD-000561-0004

Technical

Supply	48V supply to Stucchi Multisystem EVO track
Light source	9mm LES COB
Initial output	**SL90** 11.8W 33.8Vf at 350mA 2700K • 1822lm • 154lm/W 3000K • 1908lm • 161lm/W 3500K • 1929lm • 163lm/W 4000K • 1919lm • 162lm/W **SL98** 10.6W 30.4Vf at 350mA 2400K • 1085lm • 102lm/W 2700K • 1205lm • 113lm/W 3000K • 1288lm • 121lm/W 3500K • 1313lm • 124lm/W 4000K • 1352lm • 127lm/W
Light distribution	Wall Wash 75.6° x 30.5°
Lumen maintenance	L90 B0 in excess of 94,000 hours
Colour consistency	2 SDCM
IP rating	IP20
Weight	0.38kg

STOANE
LIGHTING

ZTA.50.LV Track.Wall Wash

STD-000561-0004

Service Commitment



