

## ZTA.50.LV Track.Wall Wash

STD-000561-0005

### Configured Product

Light Source

SL98

Light Source Size

9mm LES

CCT

3000K

Finish

RAL 9010 Pure White

Track adaptor colour

White

Dimming


DALI

Attachments

Straight/Slash Cut Snoot (specified separately)

Secondary Lensing Accessories

With accessories

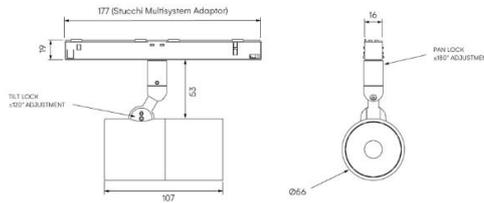

Modular high-performance, low voltage track-mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments.

Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

## Product Description

ZTA.50.LV Track.Wall Wash is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. Easily interchangeable between Zoom, Fixed optic and Framing projector options.

## Key Features

- Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
- Fixed optics can be easily swapped to Zoom, Wall Wash and additional framer attachments.
- Versatile adjustment: 363° pan rotation and 130° tilt with a lockable spot.
- Advanced dimming options: DALI, 0-10V, and Wireless dimming, down to 0.1%.
- High-performance lighting: up to 98 CRI LEDs with interchangeable optical systems.
- Customisable accessories: can house up to two lens accessories and various attachments.
- Ceiling mounting only: designed exclusively for ceiling installations.

## Compliance



# Technical

**Supply** 48V supply to Stucchi Multisystem EVO track

**Light source** 9mm LES COB

**Initial output** **SL90** 11.8W 33.8Vf at 350mA

2700K · 1822lm · 154lm/W

3000K · 1908lm · 161lm/W

3500K · 1929lm · 163lm/W

4000K · 1919lm · 162lm/W

**SL98** 10.6W 30.4Vf at

350mA

2700K · 1205lm · 113lm/W

3000K · 1288lm · 121lm/W

3500K · 1313lm · 124lm/W

4000K · 1352lm · 127lm/W

**Light distribution** Wall Wash 75.6° x 30.5°

**Lumen maintenance** L90 B0 in excess of 94,000 hours

**Colour consistency** 2 SDCM

**IP rating** IP20

**Weight** 0.38kg

## Service Commitment

