

ZTA.50.Bay

STD-000564-0050

Configured Product

Light Source

SL90

Light Source Size

9mm LES

CCT

3000K

Beam

Wide Flood 46.6°

Finish

RAL 9010 Pure White

Dimming


Driver specific

Cable Length

500mm

Secondary Lensing Accessories

Without accessories




Modular high-performance, ceiling mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Product Description

ZTA.50.Bay is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics.

Key Features

- Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
- High-performance lighting: up to 98 CRI LEDs with interchangeable optical systems.
- Customisable accessories: can house up to two lens accessories and various attachments.
- Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.

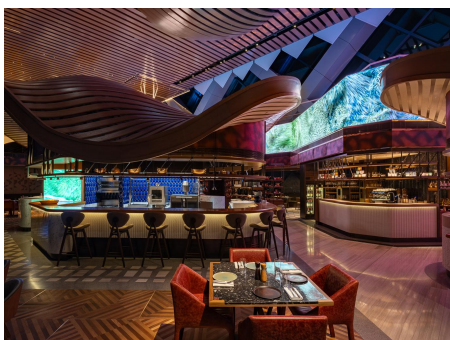

STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

ZTA.50.Bay

STD-000564-0050

Compliance



Technical

Supply	Remote constant current LED driver required	
Light source	6mm LES COB	9mm LES COB
Initial output	SL90 8W 32Vf at 250mA	SL90 11.8W 33.8Vf at 350mA
	2700K · 1087lm · 136lm/W	2700K · 1822lm · 154lm/W
	3000K · 1133lm · 141lm/W	3000K · 1908lm · 161lm/W
	3500K · 1144lm · 143lm/W	3500K · 1929lm · 163lm/W
	4000K · 1175lm · 147lm/W	4000K · 1919lm · 162lm/W
	SL98 8.6W 34.4Vf at 250mA	SL98 10.6W 30.4Vf at 350mA
Light distribution	2400K · 733lm · 85lm/W	2400K · 1085lm · 102lm/W
	2700K · 863lm · 100lm/W	2700K · 1205lm · 113lm/W
	3000K · 923lm · 107lm/W	3000K · 1288lm · 121lm/W
	3500K · 923lm · 107lm/W	3500K · 1313lm · 124lm/W
	4000K · 974lm · 113lm/W	4000K · 1352lm · 127lm/W
	Very Narrow 13.9°	Narrow 17.4°
Lumen maintenance	Narrow 14.7°	Narrow 2 18.8°
	Medium 24.1°	Medium 25.3°
	Flood 36.7°	Flood 34.1°
	Wide Flood 51.7°	Wide Flood 46.6°
Colour consistency	2 SDCM	
IP rating	IP20	
Weight	0.31kg	

Service Commitment

