STOANE
LIGHTING

# ZTA.50.Bay

STD-000564-0066

## Configured Product

Light Source

SL98

Light Source Size

9mm LES

CCT

2400K

Beam

Flood 34.1°

Finish

Matt Black

Dimming

Driver specific

Cable Length

500mm

Secondary Lensing Accessories


Without accessories

STOANE LIGHTING

# ZTA.50.Bay

STD-000564-0066



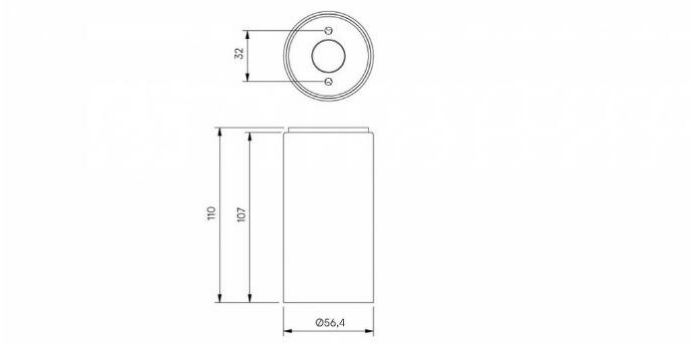


Modular high-performance, ceiling mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

**Product Description**

ZTA.50.Bay is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics.

**Key Features**

• Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
• High-performance lighting: up to 98 CRI LEDs with interchangeable optical systems.
• Customisable accessories: can house up to two lens accessories and various attachments.
• Advanced dimming options: DALI, 0-10V, DMX and Wireless dimming, down to 0.1%.








STOANE
LIGHTING

# ZTA.50.Bay

STD-000564-0066

## Compliance

STOANE LIGHTING

# ZTA.50.Bay

STD-000564-0066

## Technical

| | | |
|---|---|---|
| **Supply** | Remote constant current LED driver required | |
| **Light source** | 6mm LES COB | 9mm LES COB |
| **Initial output** | **SL90** 8W 32Vf at 250mA | **SL90** 11.8W 33.8Vf at 350mA |
| | 2700K · 1087lm · 136lm/W<br>3000K · 1133lm · 141lm/W<br>3500K · 1144lm · 143lm/W<br>4000K · 1175lm · 147lm/W | 2700K · 1822lm · 154lm/W<br>3000K · 1908lm · 161lm/W<br>3500K · 1929lm · 163lm/W<br>4000K · 1919lm · 162lm/W |
| | **SL98** 8.6W 34.4Vf at 250mA | **SL98** 10.6W 30.4Vf at 350mA |
| | 2400K · 733lm · 85lm/W<br>2700K · 863lm · 100lm/W<br>3000K · 923lm · 107lm/W<br>3500K · 923lm · 107lm/W<br>4000K · 974lm · 113lm/W | 2400K · 1085lm · 102lm/W<br>2700K · 1205lm · 113lm/W<br>3000K · 1288lm · 121lm/W<br>3500K · 1313lm · 124lm/W<br>4000K · 1352lm · 127lm/W |
| **Light distribution** | Very Narrow 13.9°<br>Narrow 14.7°<br>Medium 24.1°<br>Flood 36.7°<br>Wide Flood 51.7° | Narrow 17.4°<br>Narrow 2 18.8°<br>Medium 25.3°<br>Flood 34.1°<br>Wide Flood 46.6° |
| **Lumen maintenance** | L90 B0 in excess of 94,000 hours | |
| **Colour consistency** | 2 SDCM | |
| **IP rating** | IP20 | |
| **Weight** | 0.31kg | |

STOANE
LIGHTING

# ZTA.50.Bay

STD-000564-0066

## Service Commitment

