

STOANE LIGHTING

EQUIPMENT DESIGN + MANUFACTURE

ZTA.50.G-Stick

STD-000566-0017

Configured Product

Light Source

SL98

Light Source Size

14mm LES

CCT

2700K

Length

Custom Length

Finish


Custom Painted

Dimming

Driver specific

Secondary Lensing Accessories

Without accessories

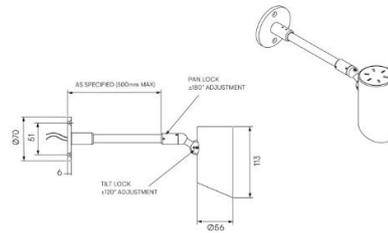

Modular high-performance, surface mounted spotlight system, for interior architectural applications such as Museums, Galleries, Retail and Workplace environments. Engineered for exceptional durability, maintainability, re-manufacturability, and recyclability, this spotlight sets a new standard for sustainable design.

Product Description

ZTA.50.G-Stick is constructed from extruded and precision-machined recycled aluminium, the spotlight features an anodised and powder-coated finish for enhanced durability and aesthetics. Dedicated Wall Wash optic for illuminating graphic displays.

Key Features

- Sustainable construction: made from recycled aluminium with a long-lasting anodised and powder-coated finish. Specialist finishes available on request.
- Stem can be specified to length.
- Versatile adjustment: 363° pan rotation and 130° tilt with a lockable spot.
- High-performance lighting: up to 98 CRI LEDs.
- Customisable accessories: can house up to one lens accessory and various attachments.

Compliance



Technical

Supply Remote constant current LED driver required

Light source 14mm LES COB

Initial output **SL90** 11.7W 33.4Vf at
350mA

2700K · 1865lm · 159lm/W

3000K · 1953lm · 167lm/W

3500K · 1975lm · 169lm/W

4000K · 1963lm · 168lm/W

SL98 13W 32.4Vf at 400mA

2700K · 1573lm · 121lm/W

3000K · 1680lm · 130lm/W

3500K · 1714lm · 132lm/W

4000K · 1764lm · 136lm/W

Light distribution Wall Wash 66.3° x 40.7°

Lumen maintenance L90 B0 in excess of 94,000 hours

Colour consistency 2 SDCM

IP rating IP20

Weight 0.5kg

Service Commitment

